


CHIP INDUCTOR 8000 SERIES

FECHA: Abril 09 2025	DWG: 8029
DRAWN: VIVI	APPROVED BY: A.P. 4-9-25

Bobina	B-8000-6 (Polvo de hierro) Largo: 85 – 88, Corte: 40 – 41
Alambre	42 S.E.
Vueltas	30.5
Tipo de embobinado	2 Secciones

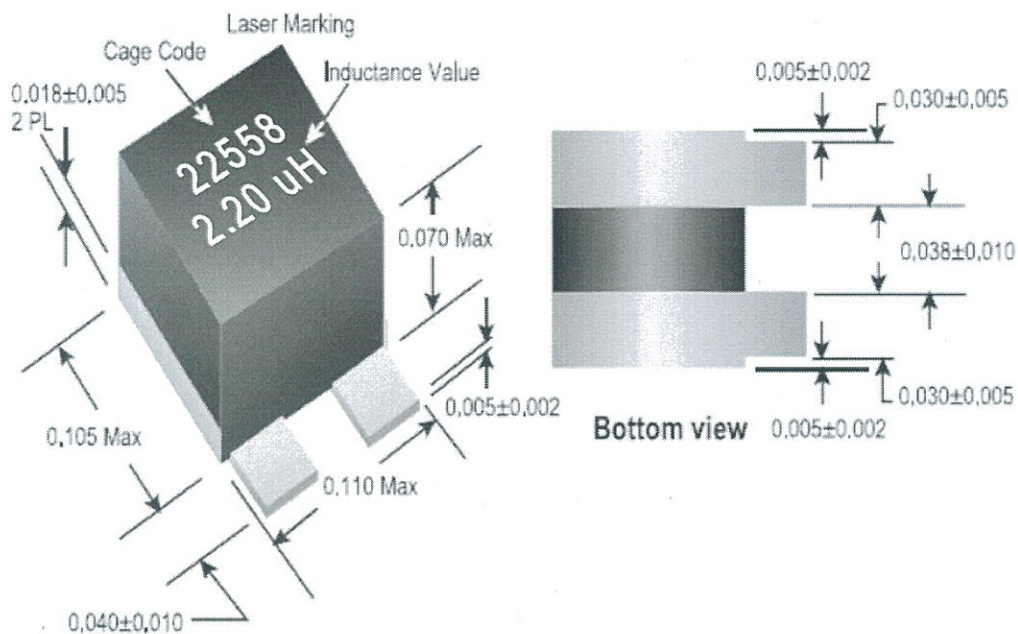

CARACTERÍSTICAS ELECTRICAS						
Inductance ± 10% (μH)	Q min	Q typ	Test Freq (MHz)	SRF (min) (MHz)	DCR (max) (Ohms)	Current (max) (mA)
2.20 (1.98 – 2.42)	38	45	7.9	85	1.5 (1500mΩ)	130

NOTE: