

Date de création	13/01/25
Date de dernière mise à jour	13/01/25
Auteur(s)	PIOLET Jean-Marc
Matière (E5-E6-E7-AP)	E6
Compétence validées	

Configuration proxy virtuel (fonctionnel et configurable)

*Pfsense et Debian client sur **réseau pédagogique SIO***

Sommaire

1 – PF _{SENSE}	3
1.1 <i>Add-ons</i>	3
1.2 <i>Paramétrage</i>	4
2 – REQUÊTE HTTP.....	5


1 - PFSense

On va sur **firefox** si vous avez pas planté votre machine comme mon collègue de travail.

On tape 192.168.14.254 et on rentre :

Username : **admin**


Password : **pfsense**

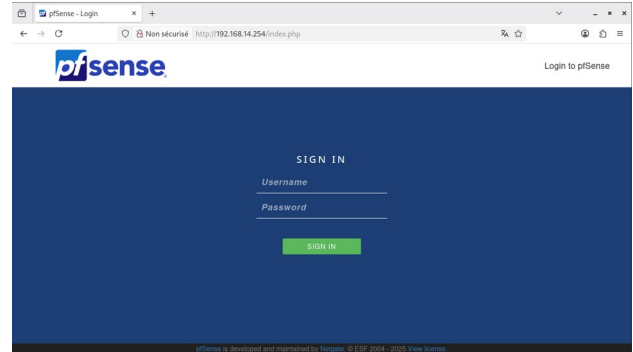


Il faut faire attention à ce que votre machine soit connecté à internet grâce à son lien avec le réseau pédagogique.

1.1 Add-ons

Pour pouvoir paramétrer le pare-feu, on a besoin d'installer le plugin *squid*.

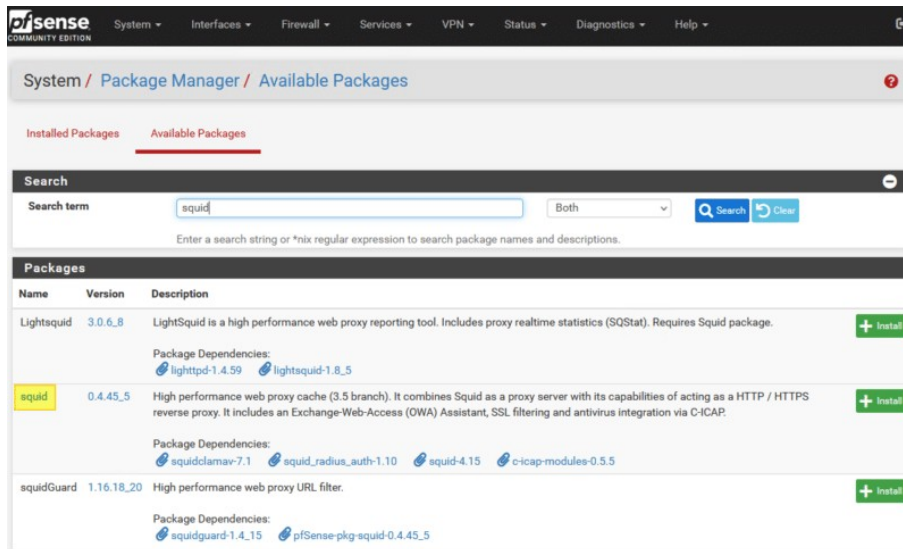

Une fois que l'installation est faite, on peut lancer la configuration.

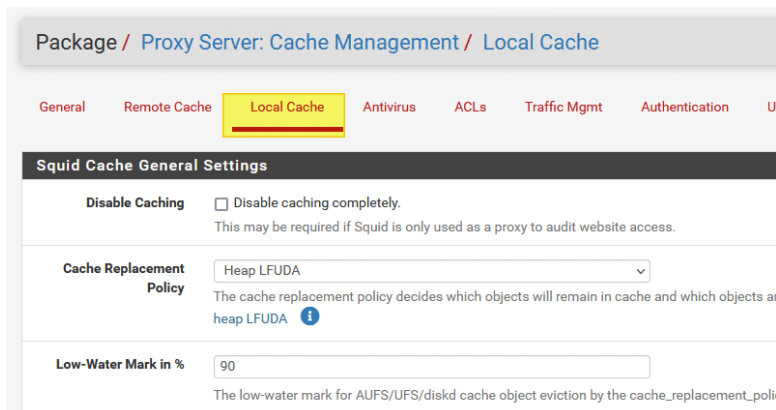

On configure d'abord la mémoire cache (optionnel mais utile pour un bon fonctionnement).

1.2 Paramétrage

Squid General Settings

Enable Squid Proxy

☒ Check to enable the Squid proxy.

Important: If unchecked, ALL Squid services will be disabled and stopped.

Keep Settings/Data

☒ If enabled, the settings, logs, cache, AV defs and other data will be preserved across package reinstalls.

Important: If disabled, all settings and data will be wiped on package uninstall/reinstall/upgrade.

Listen IP Version

IPv4

Select the IP version Squid will use to select addresses for accepting client connections.

CARP Status VIP

none

Used to determine the HA MASTER/BACKUP status. Squid will be stopped when the chosen VIP is in BACKUP status, and started in MASTER status.

Important: Don't forget to generate Local Cache on the secondary node and configure [XMLRPC Sync](#) for the settings synchronization.

Proxy Interface(s)

WAN

LAN

loopback

The interface(s) the proxy server will bind to. Use CTRL + click to select multiple interfaces.

Outgoing Network Interface

Default (auto)

The interface the proxy server will use for outgoing connections.

Proxy Port

3128

This is the port the proxy server will listen on. Default: 3128

ICP Port

This is the port the proxy server will send and receive ICP queries to and from neighbor caches. Leave this blank if you don't want the proxy server to communicate with neighbor caches through ICP.

Allow Users on Interface

☒ If checked, the users connected to the interface(s) selected in the 'Proxy interface(s)' field will be allowed to use the proxy. There will be no need to add the interface's subnet to the list of allowed subnets.

Activer W
Accédez aux

Patch Captive Portal

This feature was removed - see [Bug #5594](#) for details!

On active le plugin, pour éviter de déclarer le réseau en second temps, on sélectionne LAN dans l'interface du proxy.

On configure le port du proxy à : 3128

On autorise les utilisateurs sur cette interface.

On coche ensuite l'option *Transparent HTTP Proxy* pour le protocole HTTP. Pour le protocole HTTPS, il faudra cocher une autre option (optionnel)

Transparent Proxy Settings

Transparent HTTP Proxy

☒ Enable transparent mode to forward all requests for destination port 80 to the proxy server.

1

Transparent proxy mode works without any additional configuration being necessary on clients.

Important: Transparent mode will filter SSL (port 443) if you enable 'HTTPS/SSL Interception' below.

Hint: In order to proxy both HTTP and HTTPS protocols without intercepting SSL connections, configure WPAD/PAC options on your DNS/DHCP servers.

Transparent Proxy Interface(s)

WAN

LAN

The interface(s) the proxy server will transparently intercept requests on. Use CTRL + click to select multiple interfaces.

Bypass Proxy for Private Address Destination

☐ Do not forward traffic to Private Address Space (RFC 1918 and IPv6 ULA) destinations. Destinations in Private Address Space (RFC 1918 and IPv6 ULA) are passed directly through the firewall, not through the proxy server.

Bypass Proxy for These Source IPs

Do not forward traffic from these source IPs, CIDR nets, hostnames, or aliases through the proxy server but let it pass directly through the firewall. Applies only to transparent mode. Separate entries by semi-colons (;)

Bypass Proxy for These Destination IPs

Do not proxy traffic going to these destination IPs, CIDR nets, hostnames, or aliases, but let it pass directly through the firewall. Applies only to transparent mode. Separate entries by semi-colons (;)

Pour le moment, on laisse l'option *Enable SSL filtering* décochée.

SSL Man In the Middle Filtering

HTTPS/SSL Interception ☐ Enable SSL filtering.

SSL/MITM Mode Splice Whitelist, Bump Otherwise

The SSL/MITM mode determines how SSL interception is treated when 'SSL Man In the Middle' Default: Splice Whitelist, Bump Otherwise. [Click Info for details.](#)

SSL Intercept Interface(s) WAN

The interface(s) the proxy server will intercept SSL requests on. Use CTRL + click to select mult

On active les logs pour notifier de la bonne fonction du plugin.

Logging Settings

Enable Access Logging ☒ This will enable the access log.

Warning: Do NOT enable if available disk space is low.

Log Store Directory /var/squid/logs

The directory where the logs will be stored; also used for logs other than the Access Log above. Default: /var/squid/logs

Important: Do NOT include the trailing / when setting a custom location.

Rotate Logs 365

Defines how many days of logfiles will be kept. Rotation is disabled if left empty.


Si on veut, on règle la durée de stockage des données.

On sauvegarde et on teste.

2 - REQUÊTE HTTP

Pour tester le bon fonctionnement de notre proxy transparent HTTP, on peut tout simplement s'amuser à naviguer sur Internet. Pour que ce soit plus parlant, on va bloquer un nom de domaine.

On prend pour exemple le site <http://httpforever.com/>

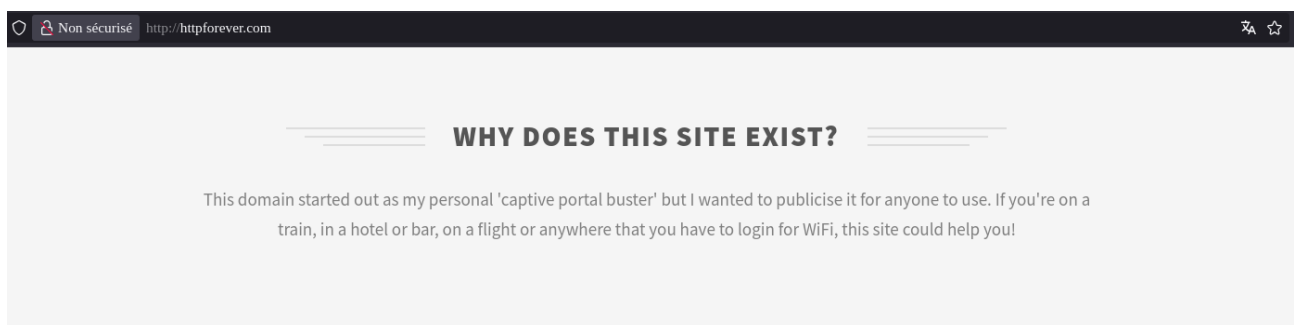

Dans la liste les listes de contrôle d'accessibilité, on peut paramétrer ce que l'on veut ajouter, retirer, bloquer etc...

Package / Proxy Server: Access Control / ACLs

General Remote Cache Local Cache Antivirus **ACLs** Traffic Mgmt Authentication Users Real Time Status Sync

Squid Access Control Lists

Allowed Subnets

Enter subnets that are allowed to use the proxy in CIDR format. All the other subnets won't be able to use the proxy.
Put each entry on a separate line.
When 'Allow Users on Interface' is checked on 'General' tab, there is no need to add the 'Proxy Interface(s)' subnet(s) to this list.

Unrestricted IPs

Enter unrestricted IP address(es) / network(s) in CIDR format. Configured entries will NOT be filtered out by the other access control directives set in this page.

On souhaite bloquer certains noms de domaines.

Blacklist

httpforever.com
lefigaro.fr

Destination domains that will be blocked for the users that are allowed to use the proxy.
Put each entry on a separate line. You can also use regular expressions.

⬅ ➡ ↻ Non sécurisé http://httpforever.com



ERROR
The requested URL could not be retrieved

The following error was encountered while trying to retrieve the URL: <http://httpforever.com/>

Access Denied.

Access control configuration prevents your request from being allowed at this time. Please contact your service provider if you feel this is incorrect.
Your cache administrator is admin@localhost.

Generated Tue, 20 Jan 2026 08:51:36 GMT by localhost (squid/6.3)

On observe que le site est bel et bien bloqué.

Comme prévu, on peut toujours y accéder grâce à son IP. Son nom de domaine est dans la liste noire.

