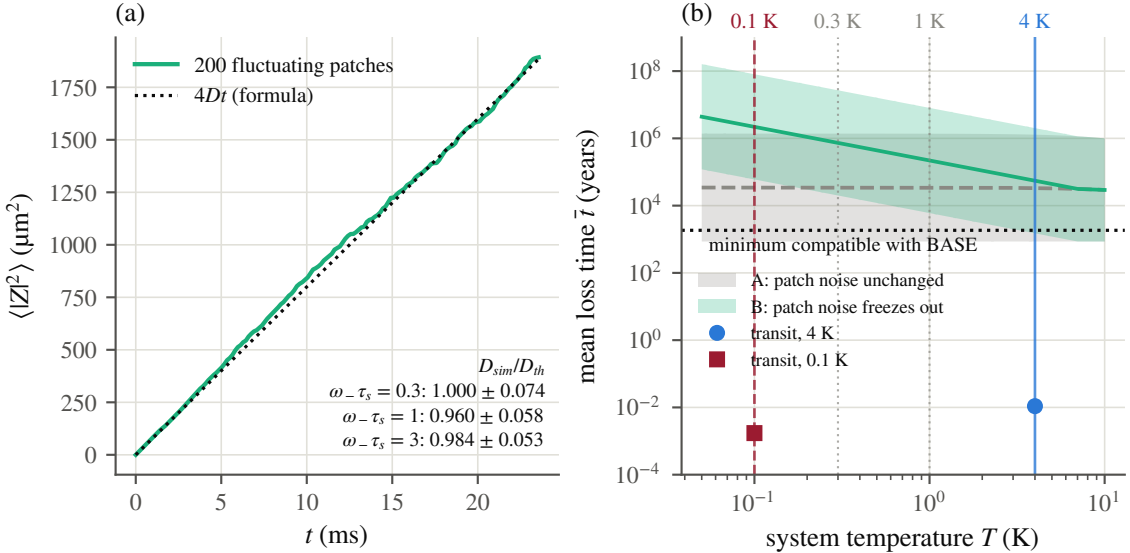
(a)
200 fluctuating patches
4Dt (formula)
⟨|Z|²⟩ (μm²)
t (ms)
D_sim/D_th
ω_− τ_s = 0.3: 1.000 ± 0.074
ω_− τ_s = 1: 0.960 ± 0.058
ω_− τ_s = 3: 0.984 ± 0.053
(b)
0.1 K
0.3 K
1 K
4 K
mean loss time t̄ (years)
minimum compatible with BASE
A: patch noise unchanged
B: patch noise freezes out
transit, 4 K
transit, 0.1 K
system temperature T (K)