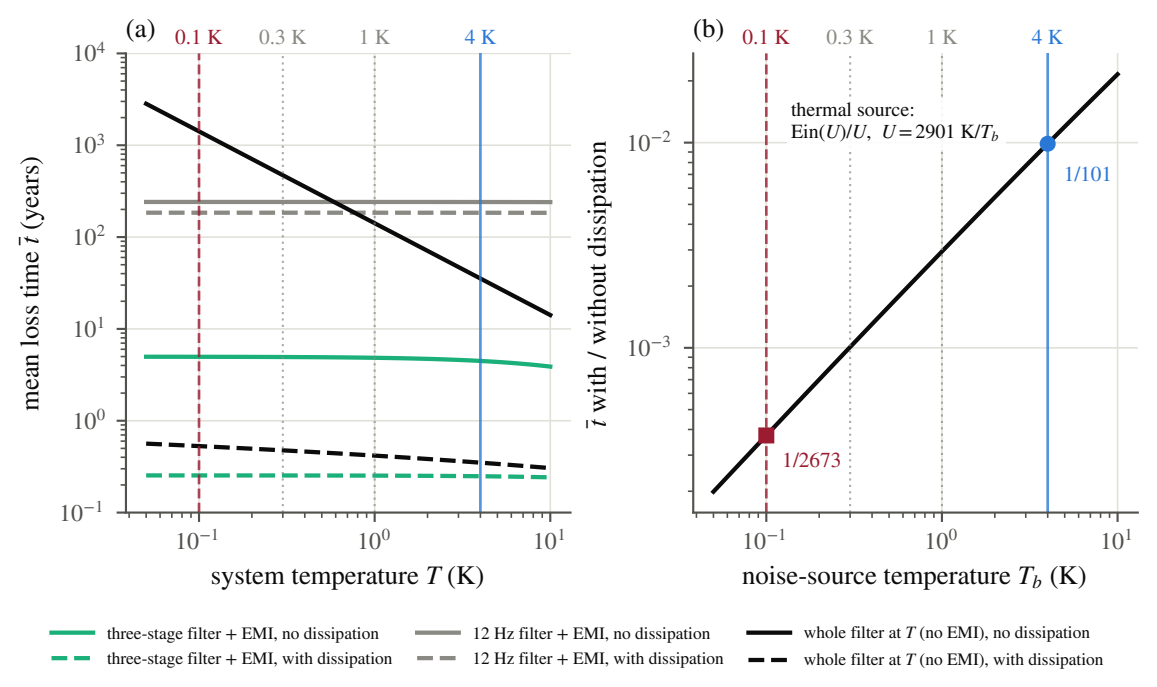
(a)
0.1 K
0.3 K
1 K
4 K
mean loss time $\bar{t}$ (years)
system temperature T (K)
(b)
thermal source:
Ein(U)/U, $U = 2901\ \mathrm{K}/T_b$
1/101
1/2673
$\bar{t}$ with / without dissipation
noise-source temperature T_b (K)
three-stage filter + EMI, no dissipation
three-stage filter + EMI, with dissipation
12 Hz filter + EMI, no dissipation
12 Hz filter + EMI, with dissipation
whole filter at T (no EMI), no dissipation
whole filter at T (no EMI), with dissipation