
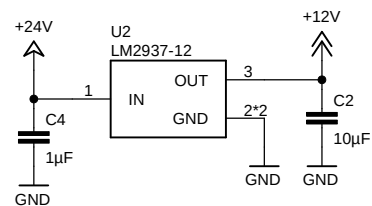


NOTE :

! please pay attention to the polarity !

This board gets its supply voltage through the connectors X3 / X4 and X5 / X9

24V and GND are labeled on the board

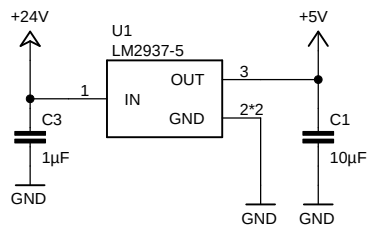

TITLE: Hotend_PCB_V1.0

Document Number:

REV:

Date: 18.11.2020 21:49

Sheet: 1/1