MONO PV MODULE DATA SHEET

Mono 500W



Quality and Safety

Rigorous quality control meeting the highest international standards

High-transmissivity low-iron tempered glass, strongaluminium frame Using UV-resistant silicon

IEC61215,IEC61730,Safety Class II,conformity to CE

Features

Aesthetic appearance with excellent efficiency based on innovative photovoltalic technologies

High quality,strong aluminium frame,passing mechanical load testing 5400 Pa and wind pressure 2400Pa

Warranties

10 years limited product warranty

10 years at 90% of the minimal rated power output

25 years at 80% of the minimal rated power output

Photovoltaic Modules

Module	500W（96Cell)
Encapsulation	Glass/EVA/Gell/EVA/Backsheet
Size and Number of cells	96(8*12)
Maximum Power Pmax W	500
Maximum Power Voltage(Vmp) V	48.6
Maximum Power Current (Imp) A	10.29
Open Circuti Voltage （Vmp) V	59.12
Short Circuit Curret (Isc) A	10.44
Module Efficiency %	19.6
Tolerance	0+3%
Max System Open Circuit Voltage	1000V
Max Series Fuse Rating	15A
Junction Box（protection degree)	⩾IP67
Dimension	1956*1310*45mm
Weight	29kg
Operate Temperature Scope	–40/＋85℃
Relative Humidity	0～100%
Frame Thinkness	45mm
Frame Colour	Silver

Standard Test Coditions（STC）：irradiance 1,000 W/㎡;AM 1,5;module temperature 25 ℃.Measuring uncertainty of power is within± 3%.

Tolerance of Pmpp:0～+3%.Certified in accordance with IEC61215，IEC61730

Temperature Coefficients


Nominal Operating Cell Temperature (NOCT)	47℃+/-2℃
Temperature Coefficient of Pmax (W/℃)	-0.47%
Temperature Coefficient of VOC (V/℃)	-0.35%
Temperature Coefficient of ISC(A/℃)	0.04%


Output

Cable 4.0mm2(TUV) Length 900mm Connector MC4 type

Packing list	
20FT container	184pcs
40HQ container	480pcs

IV Cure

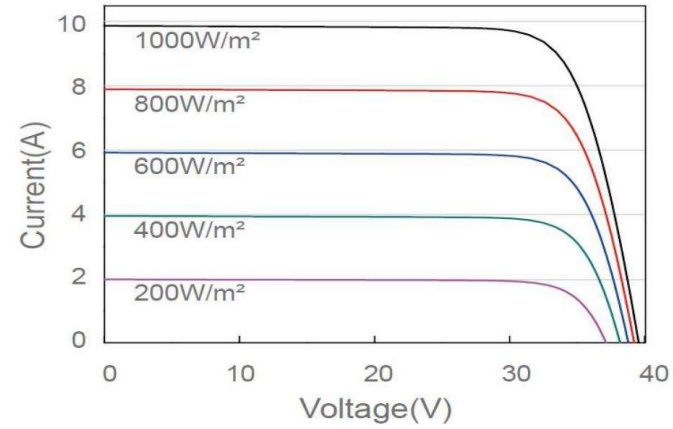

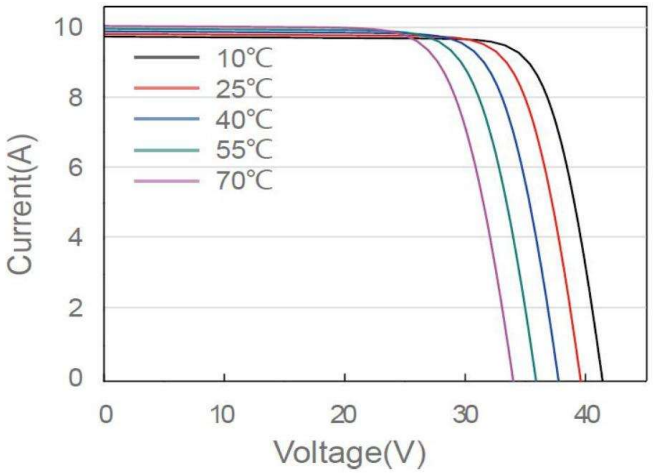

Dimensions

