




```

int en2=5;
int in3=2;
int in4=3;
int pot=A0;
void setup()
{
  pinMode(pot, INPUT);
  pinMode(en2, OUTPUT);
  pinMode(in3, OUTPUT);
  pinMode(in4, OUTPUT);
  Serial.begin(9600);
}
void loop()
{
  int input = analogRead(pot);
  int speed = map(input, 0, 1023, 0, 255);
  digitalWrite(in3, LOW);
  digitalWrite(in4, HIGH);
  analogWrite(en2,speed);
  Serial.print("Potentiometer Value: ");
  Serial.println(input);
}

```

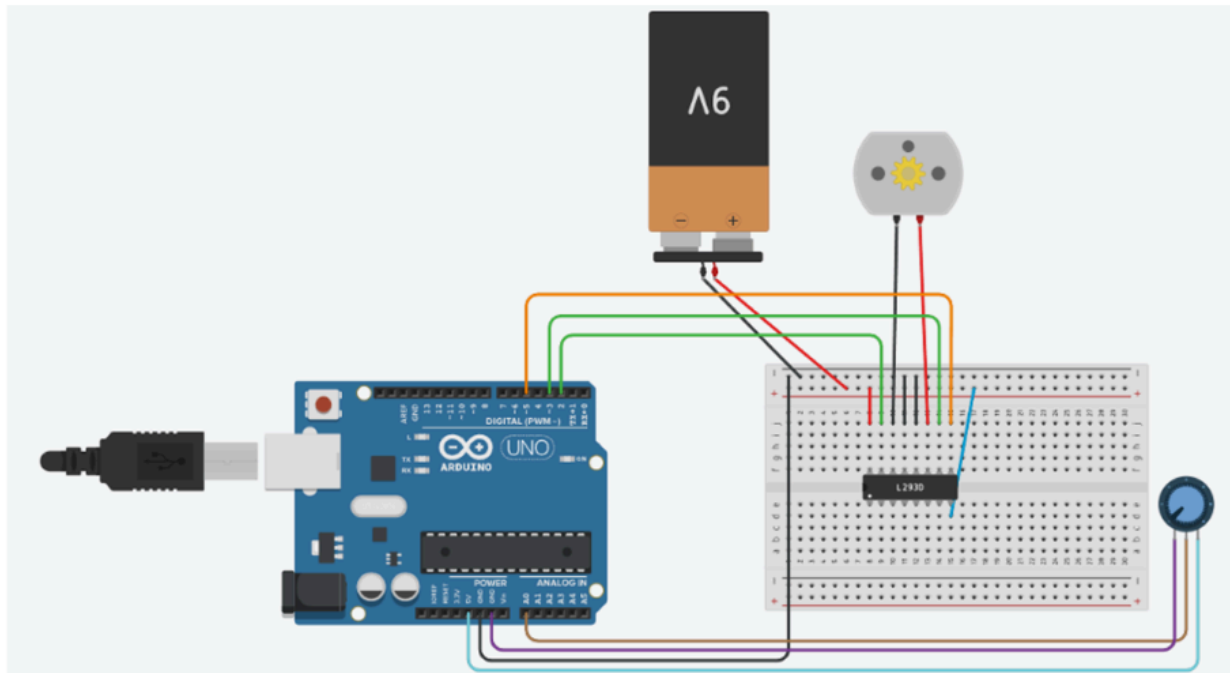