





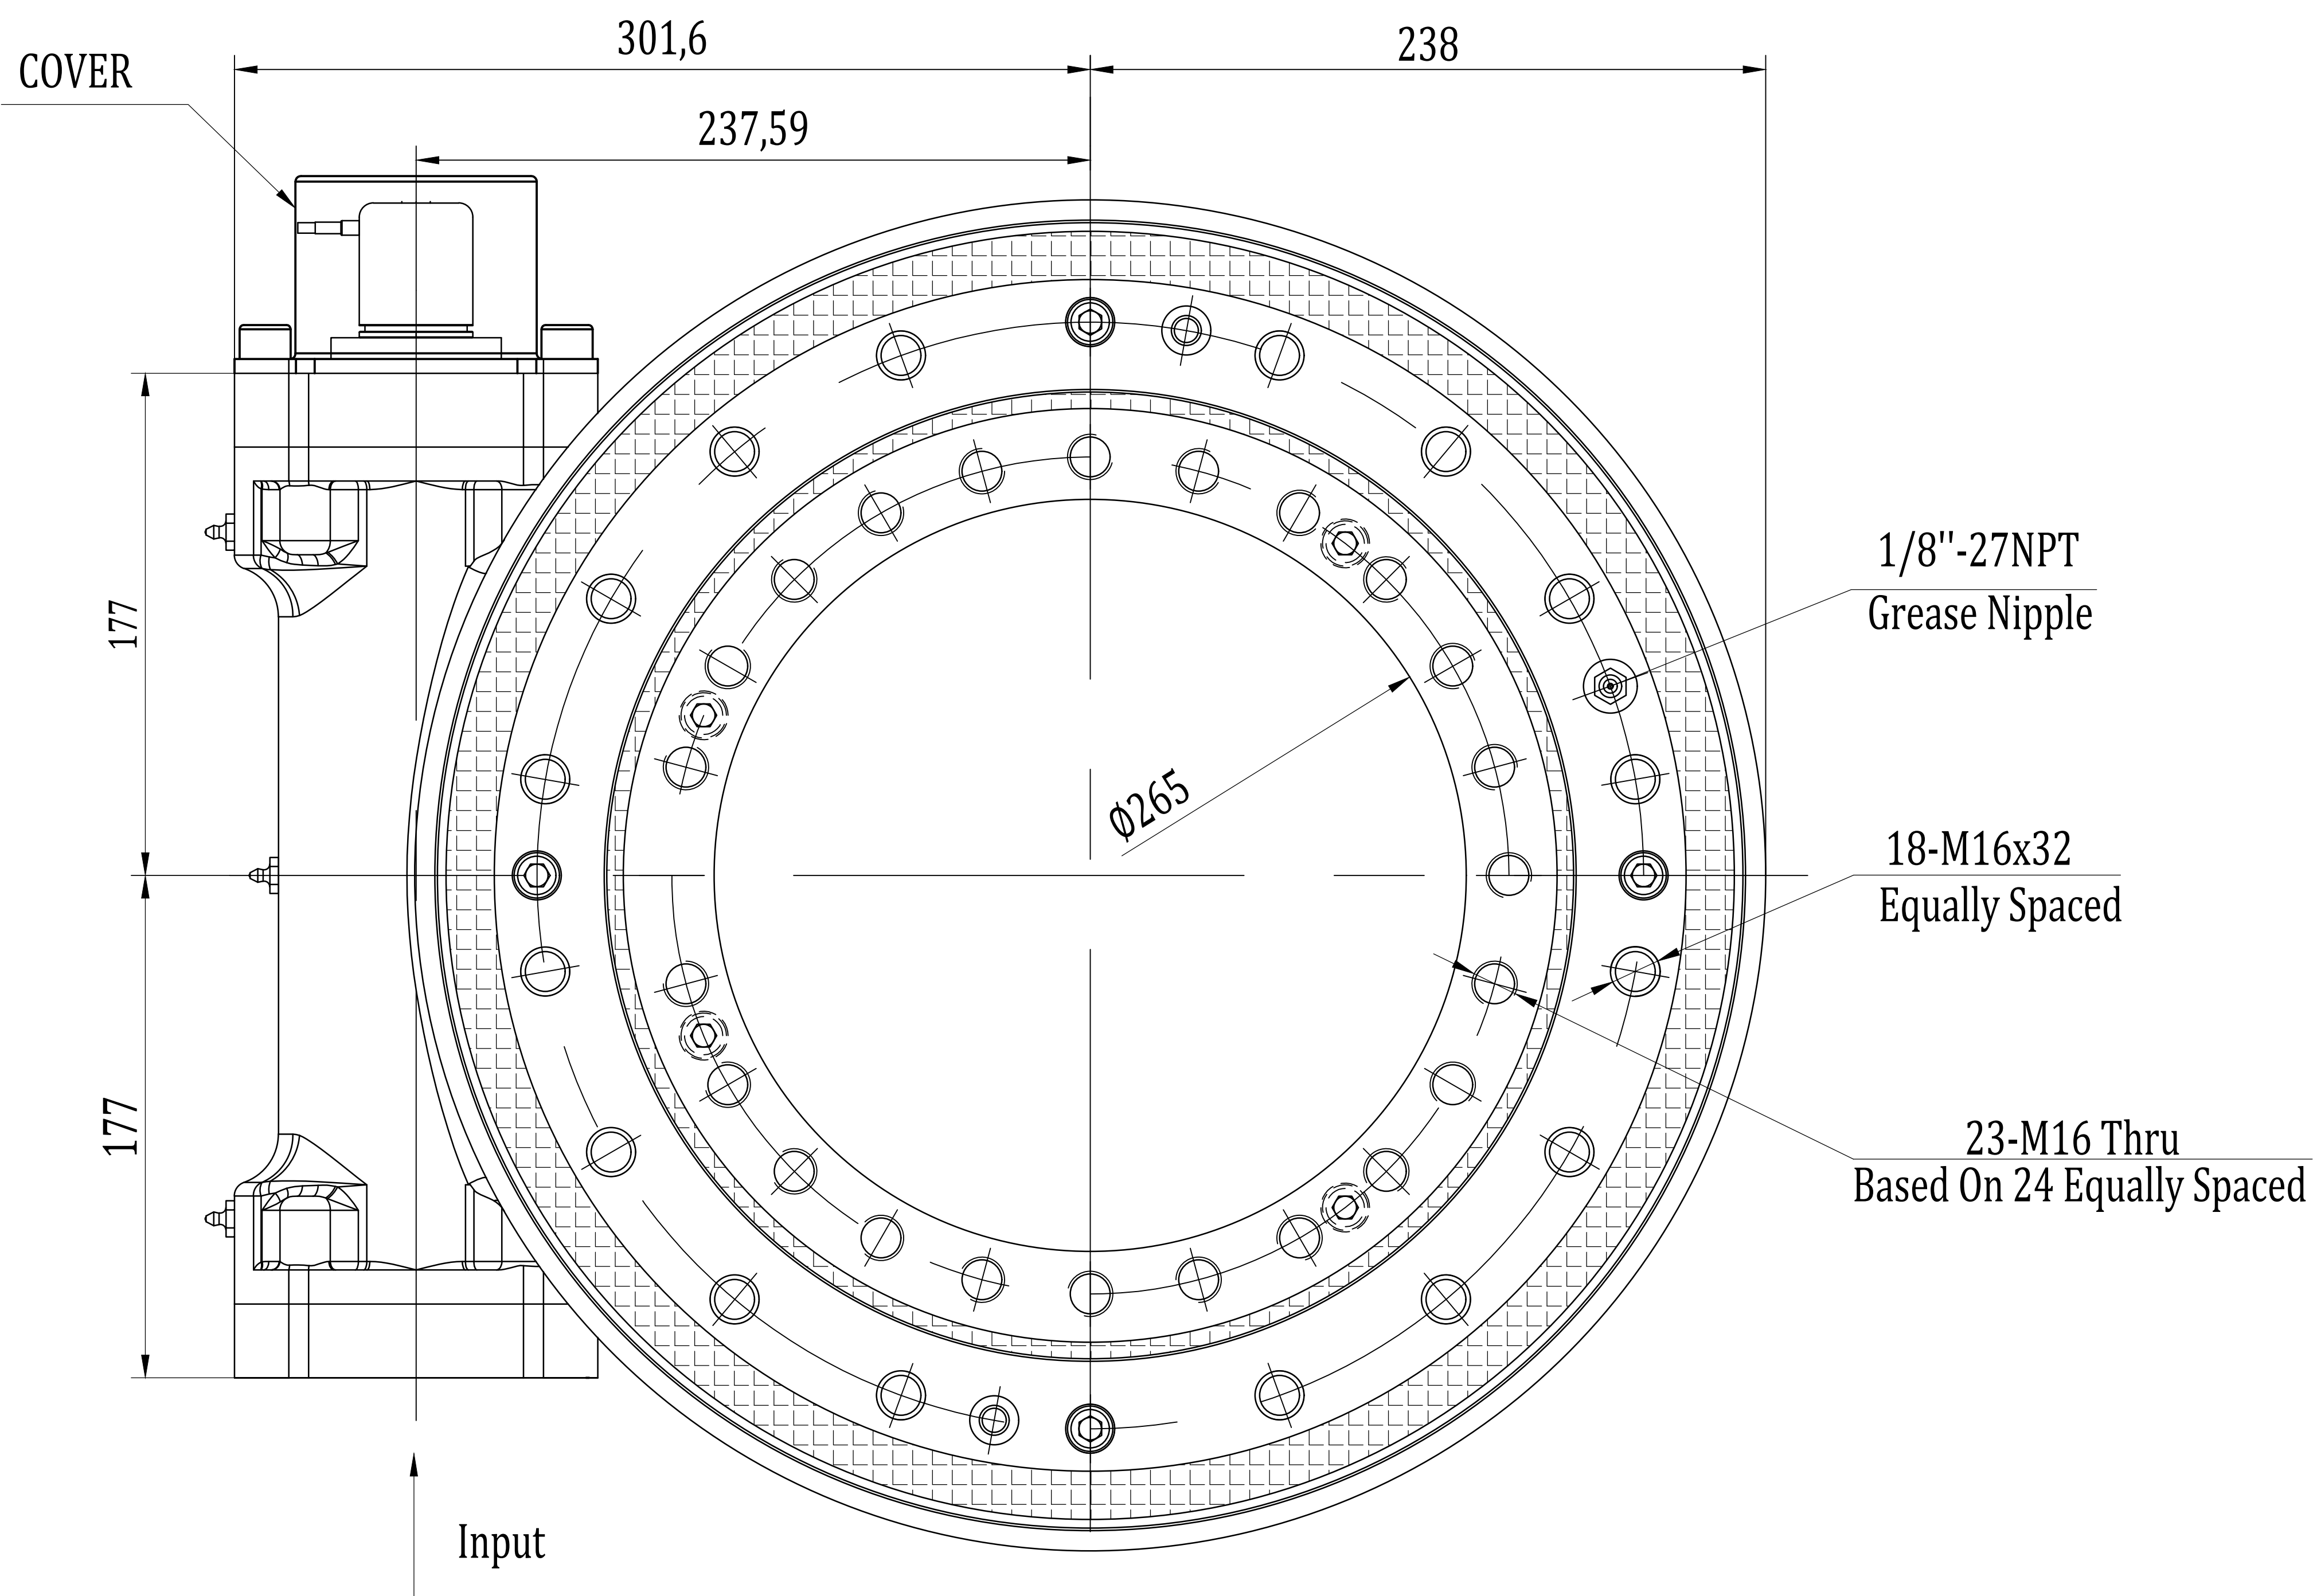



Incremental Encoder Data	
Output Circuit	Push-Pull
Resolving Power	1024
Power Supply	10-30VDC
Signal	3(A,B,0)
IP Class	IP 64
Working Temperature Range	-20°C~+70°C

Incremental Encoder Data	
Signal	Cable Colour
VDC	RED
0V	BLACK
A	GREEN
B	WHITE
Z	YELLOW
GND	SHIELD

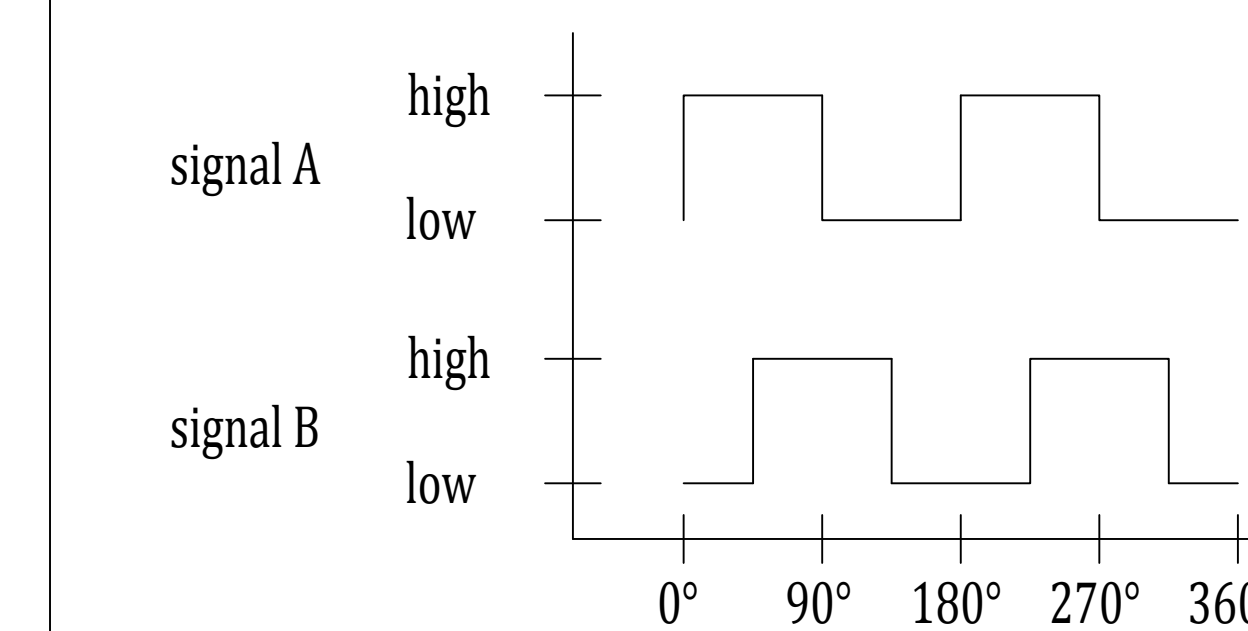

Slewing Drive Performance Parameters		
Rated Output Speed	0.018 rpm	
Output Torque	10.2 kN.m	7.53x10 ³ lbf.ft
Tilting Moment	67.8 kN.m	50x10 ³ lbf.ft
Holding Torque	48 kN.m	35x10 ³ lbf.ft
Static Axial Load Rating	555 kN	125x10 ³ lbf
Static Radial Load Rating	222 kN	50x10 ³ lbf
Gear Ratio	85:1	
Precision	≤0.17°	

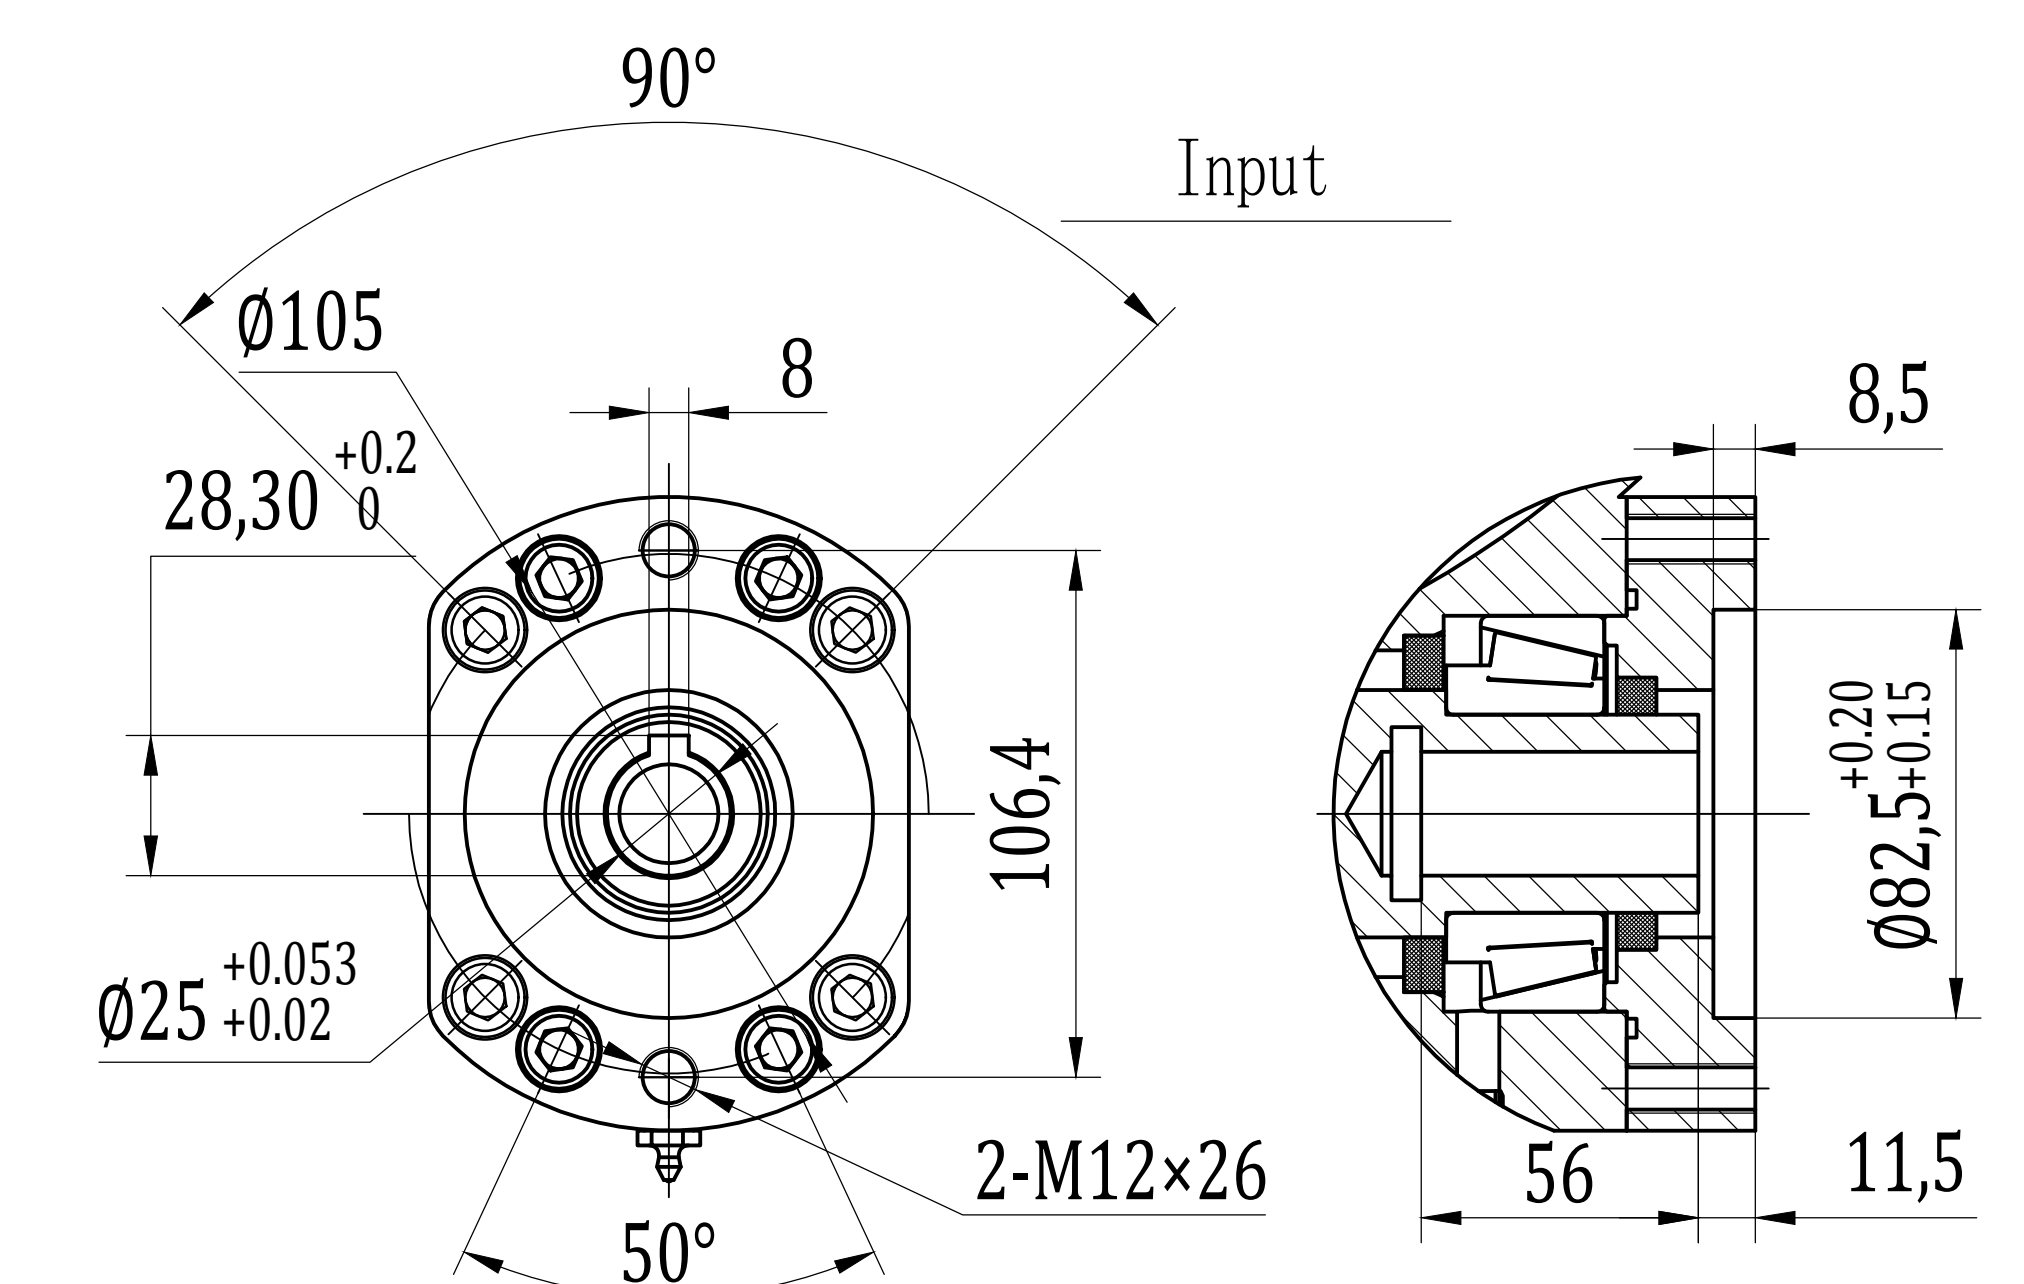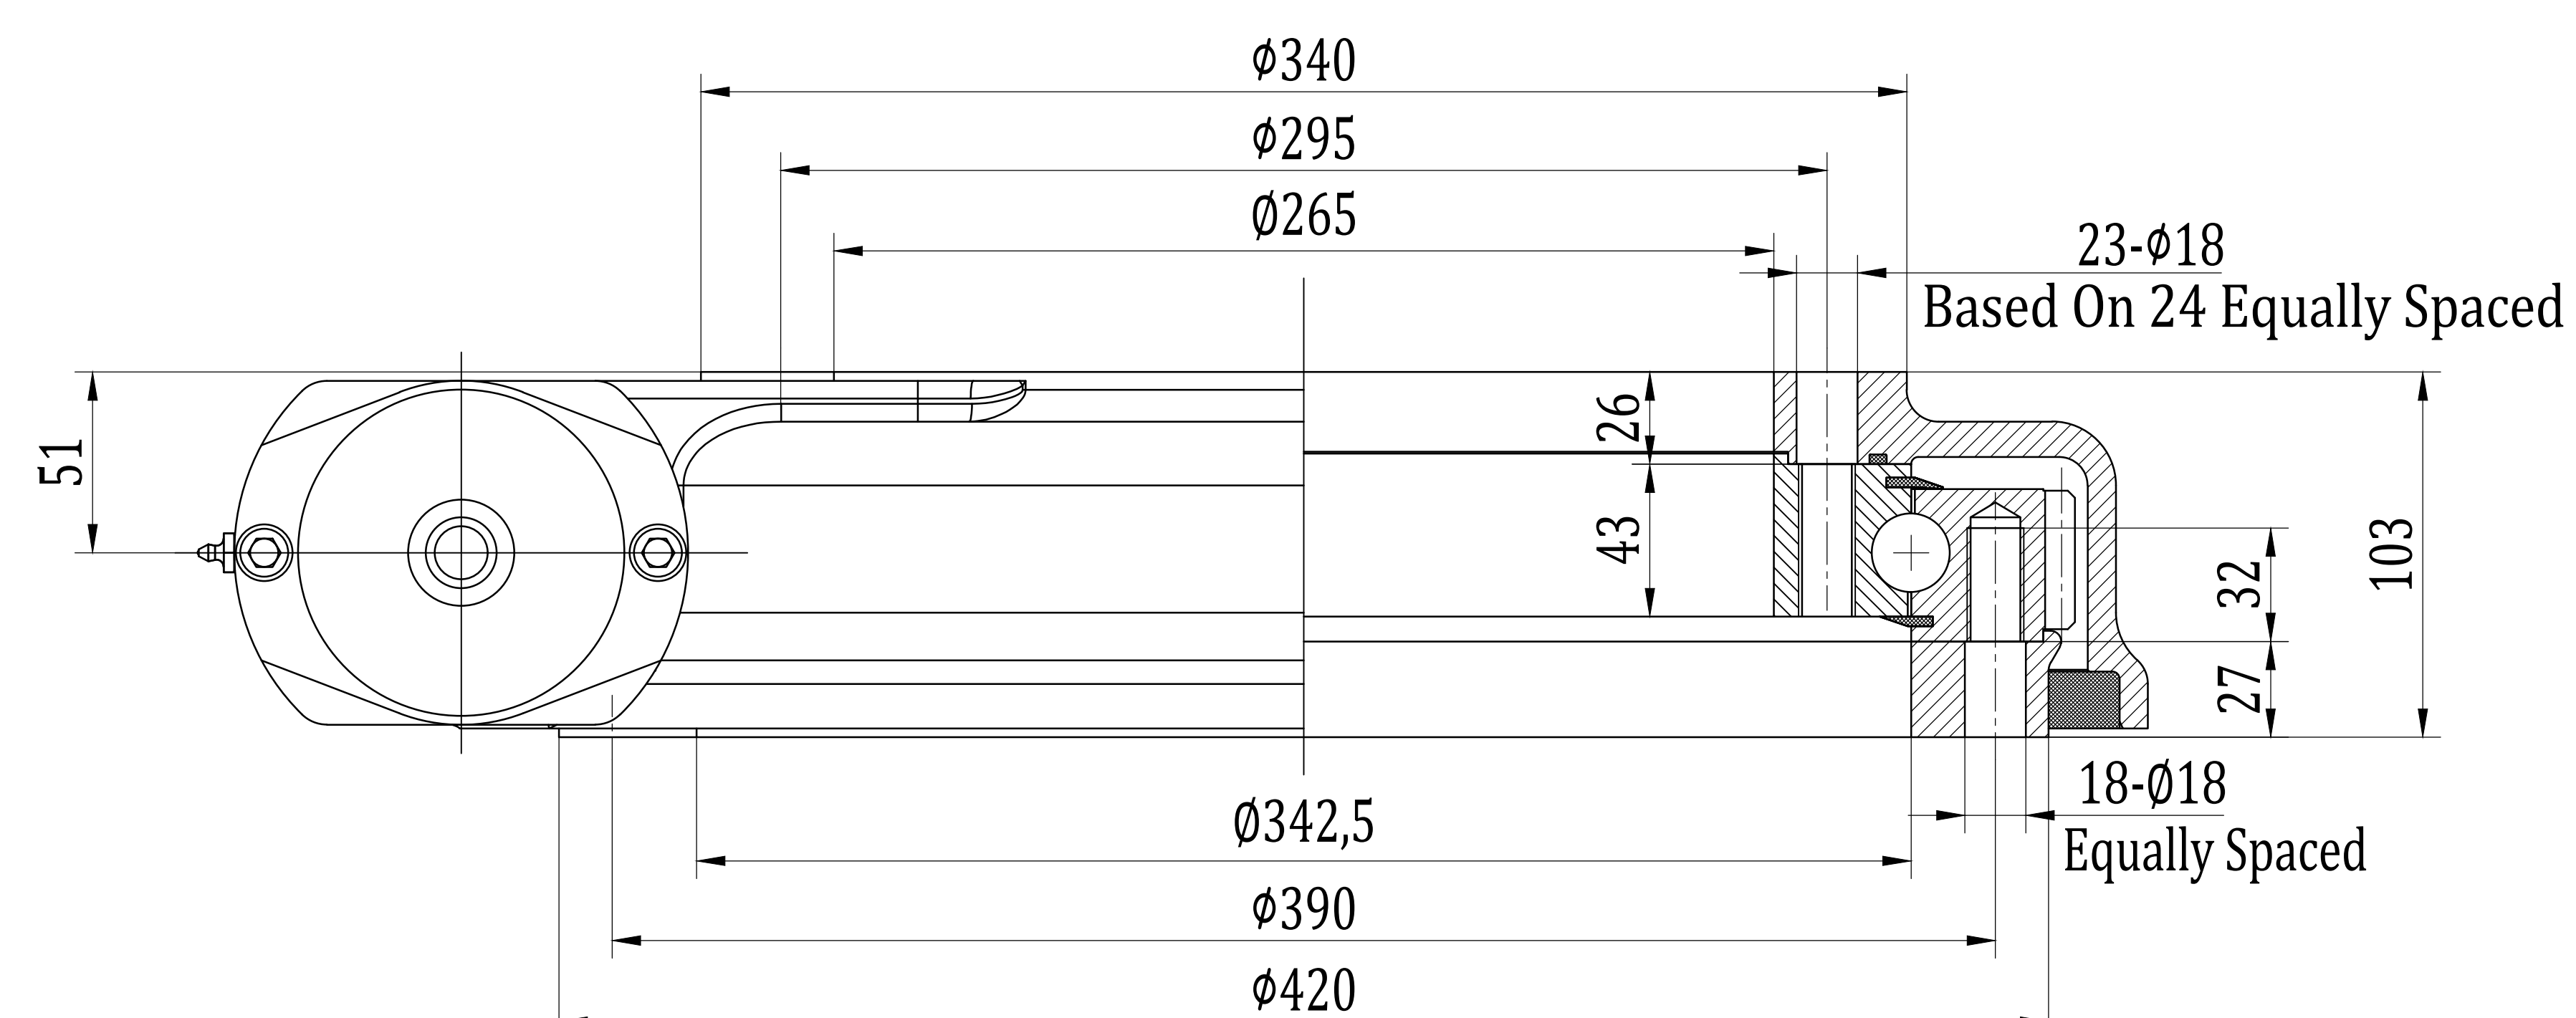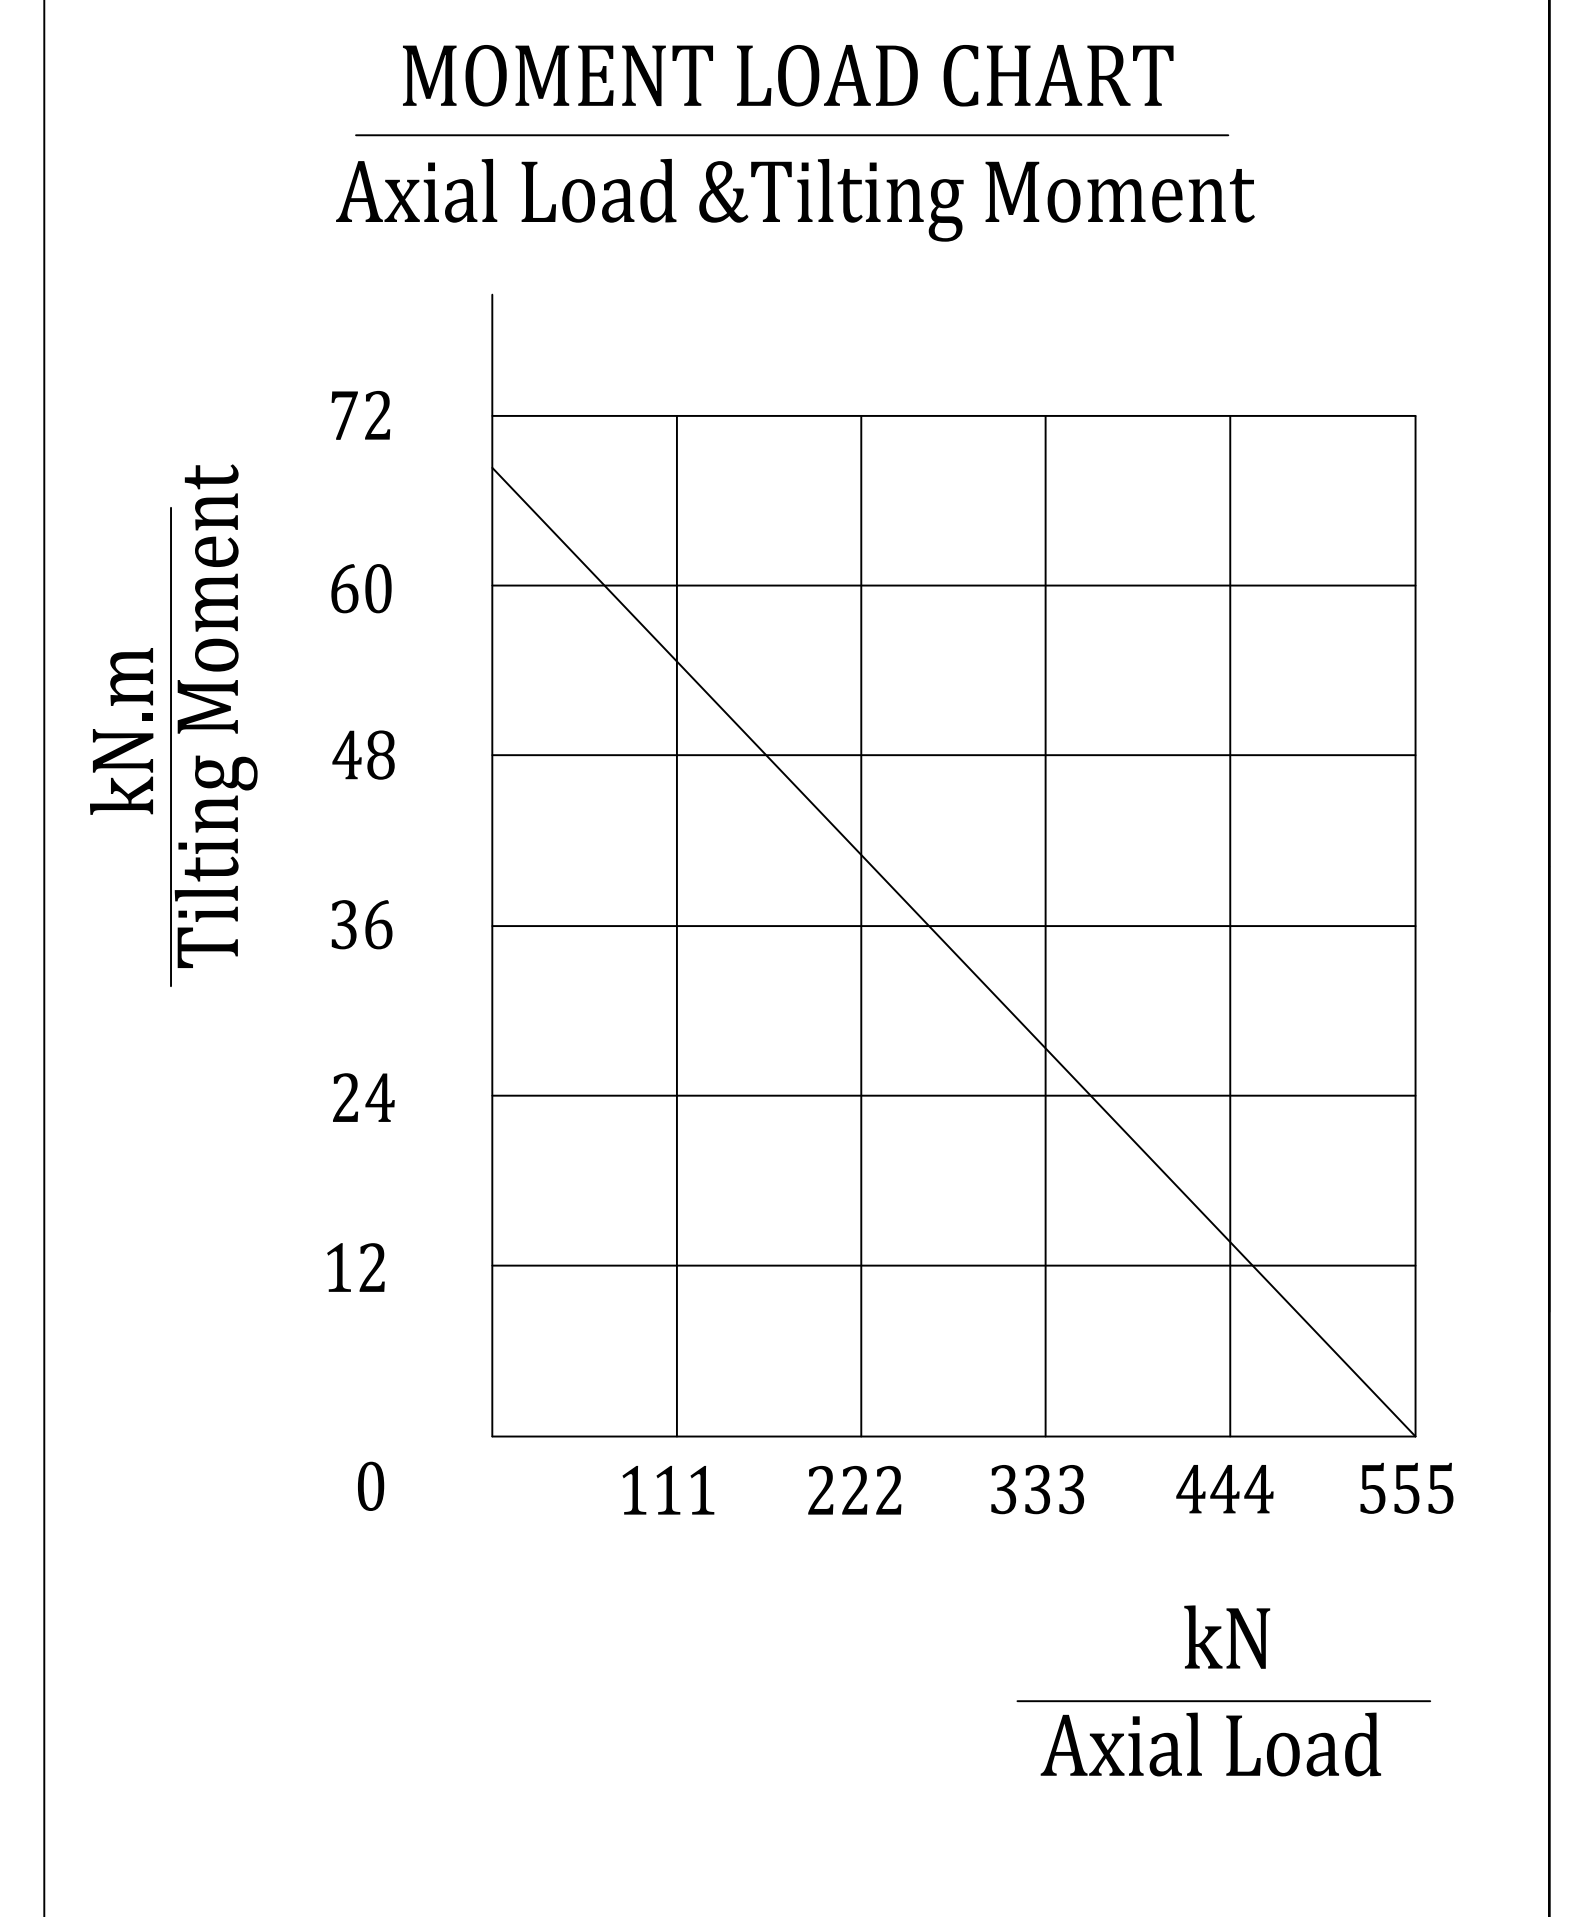

REV	DATE	REVISER	REVISER			
DESIGNED BY		Li Ming	Luoyang Jiawei Bearing Manufacturing Co., Ltd.			
CHECKED BY		Rui Wang				
APPROVED BY		Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
			72 kg	1 : 4		
SYMBOLE ISO			SIZE	A3	SE14-85-RE-H112	REV
			SHEET	1 / 1		B