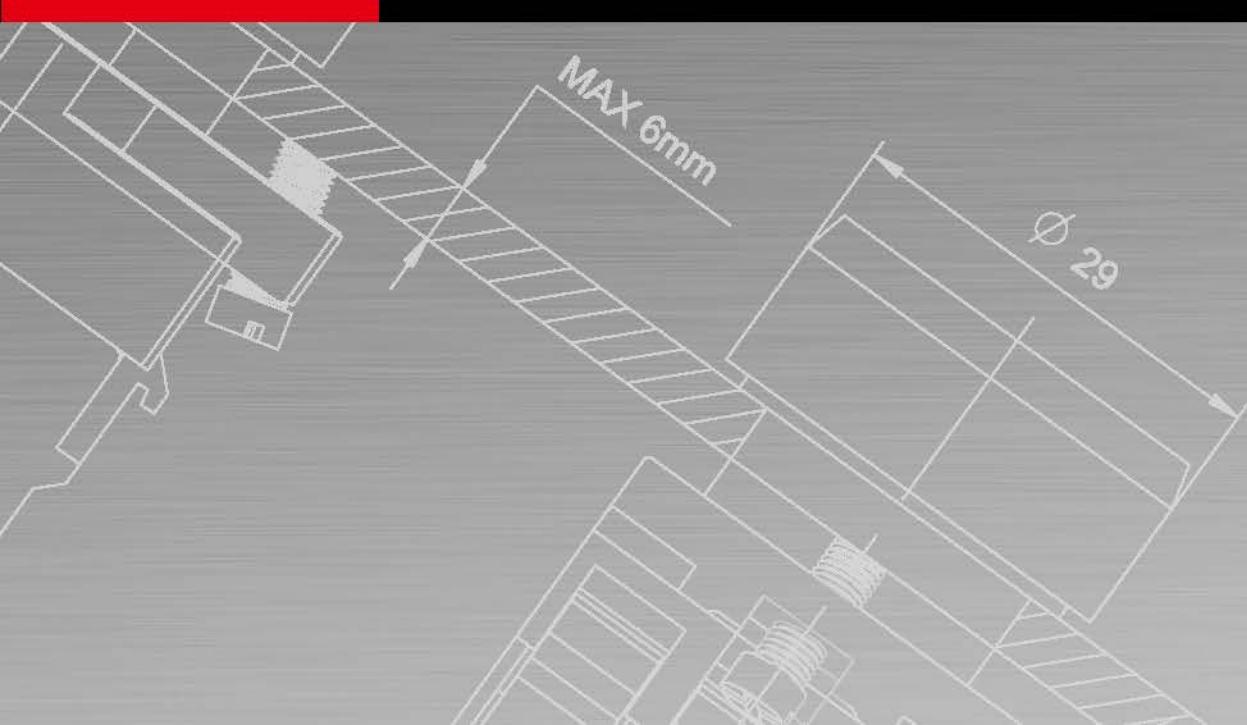


PB1 Pushbutton

PB1S metal pushbutton

PB1L metalized pushbutton

PB1J compact pushbutton



APT, established in 1993, has been specialized in the manufacturing of low voltage products such as pushbuttons and indicator lights and is one of the leading low voltage control apparatus manufacturers in China. Through years of promotion and application, APT Series products have been widely serving dozens of industrial fields in China, including power, machinery, steel, metallurgy, petrochemical, communication, water treatment, food, packaging, textile, harbor and construction etc. They have been successively chosen and used by the national key projects such as Qinshan Nuclear Power Plant, the Three Gorges Project, the Qinghai-Tibet Railway locomotives, Shenzhou V Spacecraft, Shanghai Pudong International Airport, National Stadium ("Bird's Nest")

In August, 2008, according to the asset purchase agreement between Shanghai APT Co., Ltd. (hereinafter referred to as "APT") and Siemens Electrical Apparatus Ltd. Suzhou (hereinafter referred to as "Siemens"), both parties have completed the business transaction. APT brand and related products will be under the operation of "Siemens" Group. As a new member of Siemens Group, APT will succeed and promote the business operation philosophy of the former "APT", i.e. customer orientation. With the quality management and R&D resources of Siemens, APT will focus on the manufacture of pushbuttons, indicator light components and other important low voltage products such as the signal lighting posts, cam switches, relays, current transformers and limit switches etc. Furthermore, Siemens will develop its international business operation experience to strengthen the management and business development of APT and better serve Chinese and global market demands through its advanced technology.

We will do better!

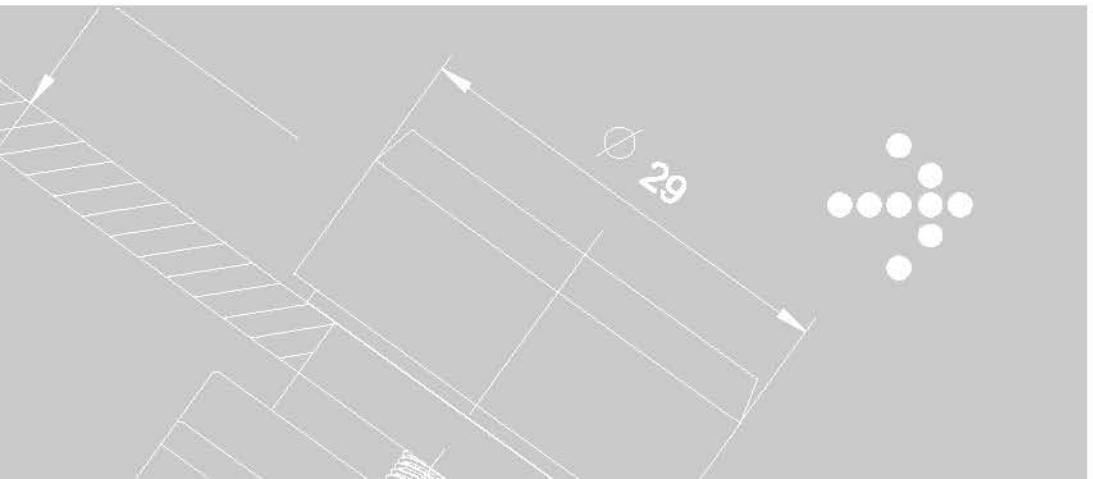



Contents

PB1 introduction	02
Model	03
Part model	03
Technical data	04
Installation	05
Mounting hole dimension	05
Remarks	05
PB1S	
Pushbutton & Raised pushbutton	06
Illuminated pushbutton & Raised illuminated pushbutton	06
Selector switch	07
Illuminated Selector switch	08
Mushroom pushbutton	09
E-stop actuator	10
E-stop actuator with trigger action	11
Key selector switch	12
Twin pushbutton	13
PB1L	
Pushbutton & Raised pushbutton	14
Illuminated pushbutton & Raised illuminated pushbutton	14
Selector switch	15
Illuminated Selector switch	16
Mushroom pushbutton	17
E-stop actuator	18
E-stop actuator with trigger action	19
Key selector switch	20
Twin pushbutton	21
PB1J	
Model	22
Technical data	22
Pushbutton	23
PL1 indicator light	24
Accessories	26
Printing content	32



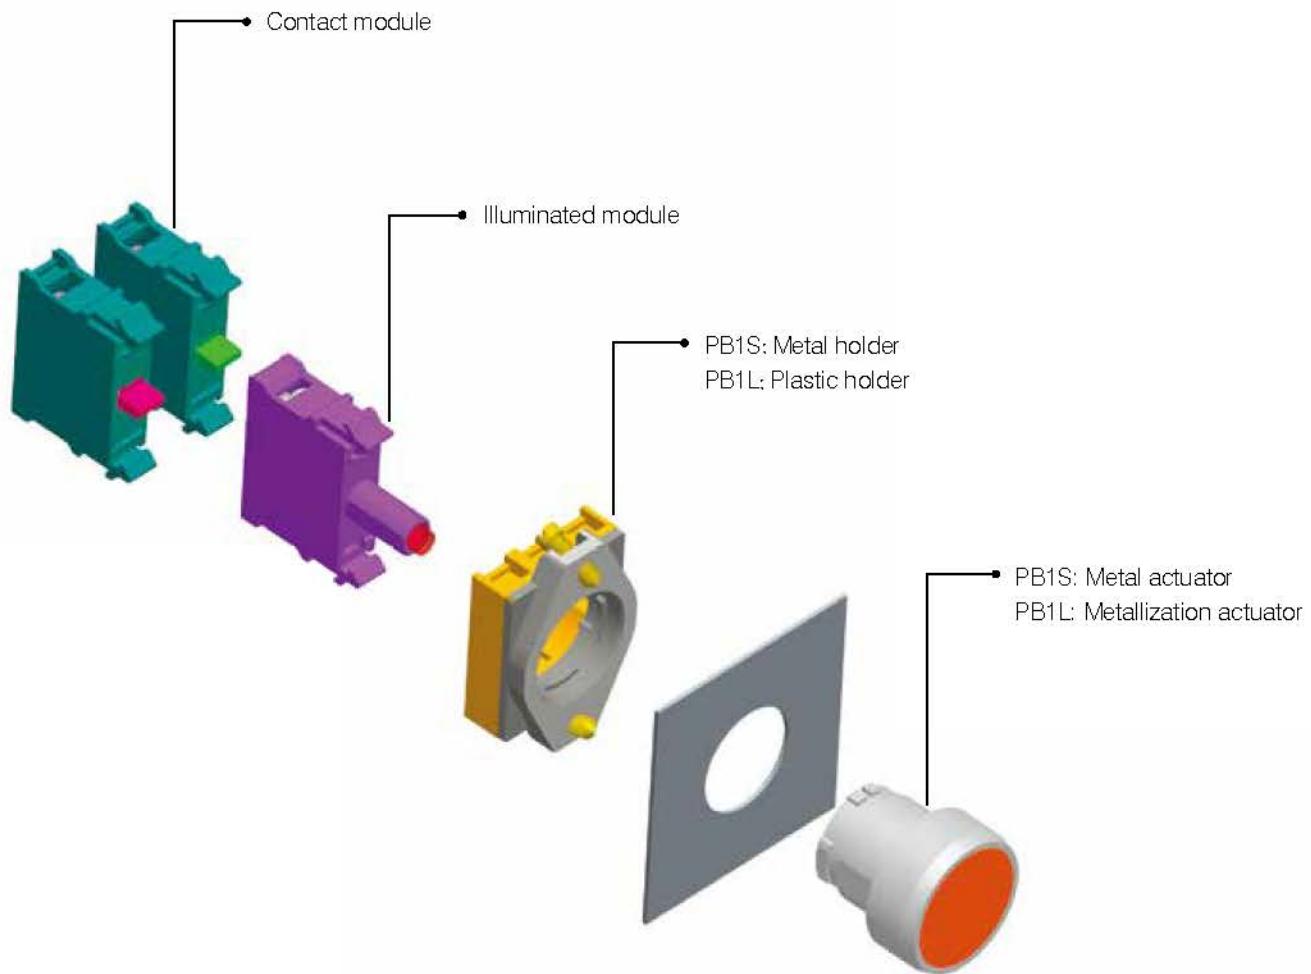
CE **RoHS**



PB1 Introduction

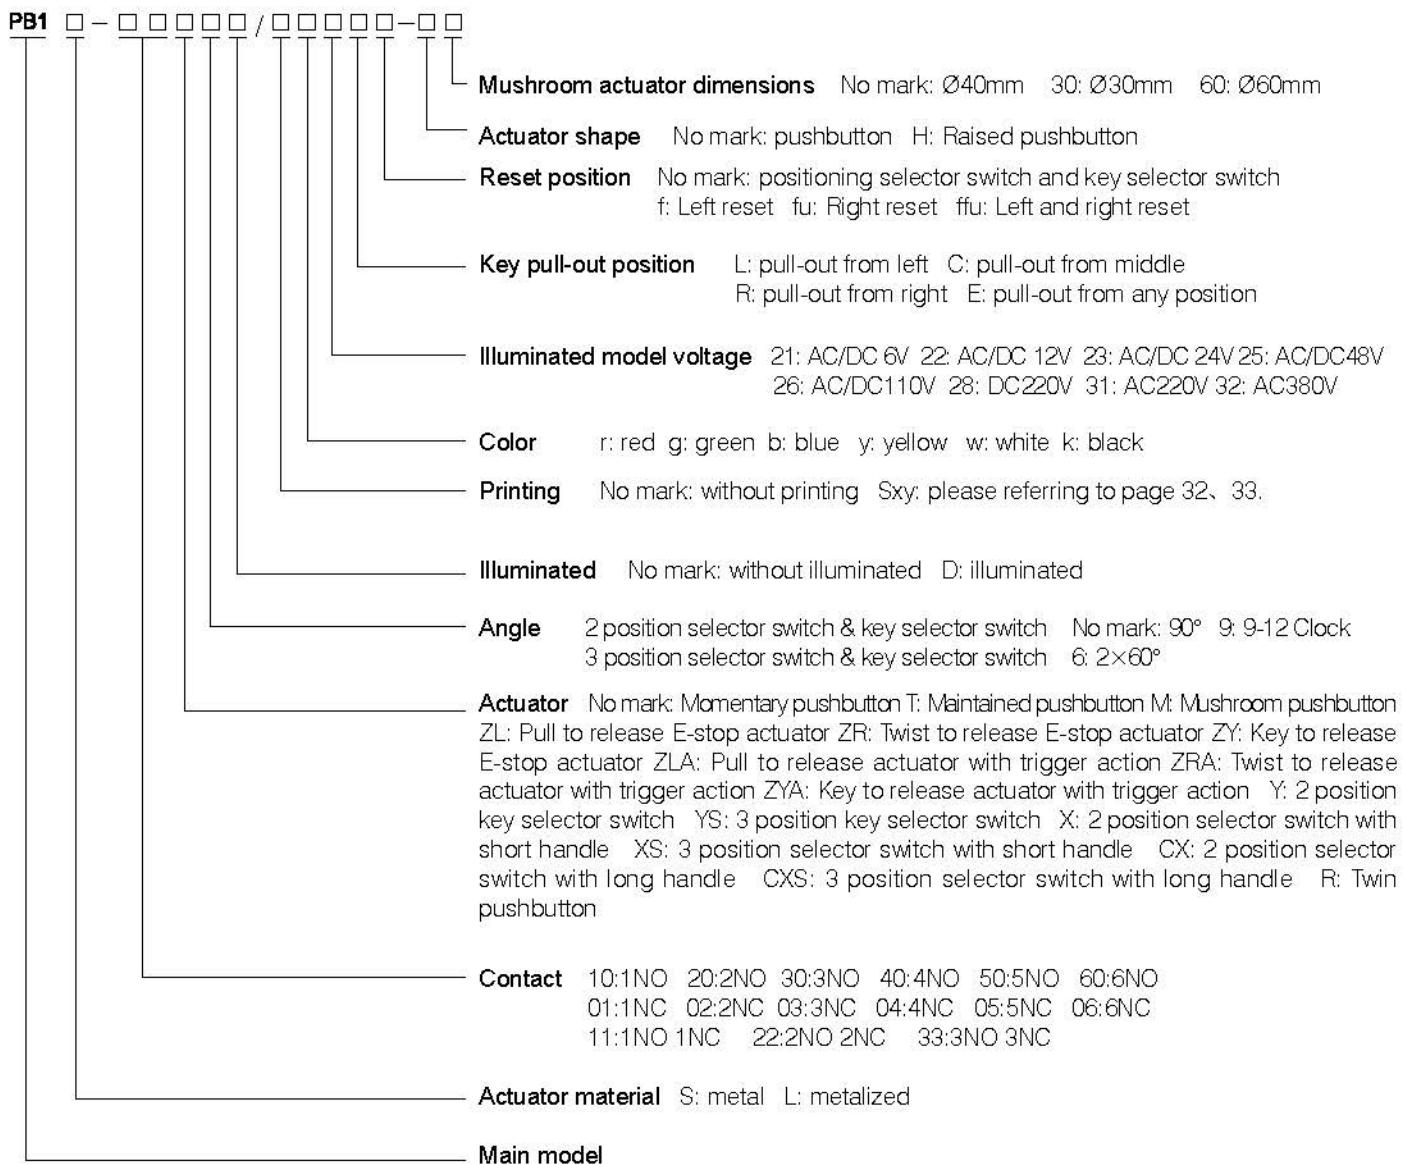
PB1 introduction

- RoHS material.
- Modularized design with easy installation.
- Protection class: IP65.

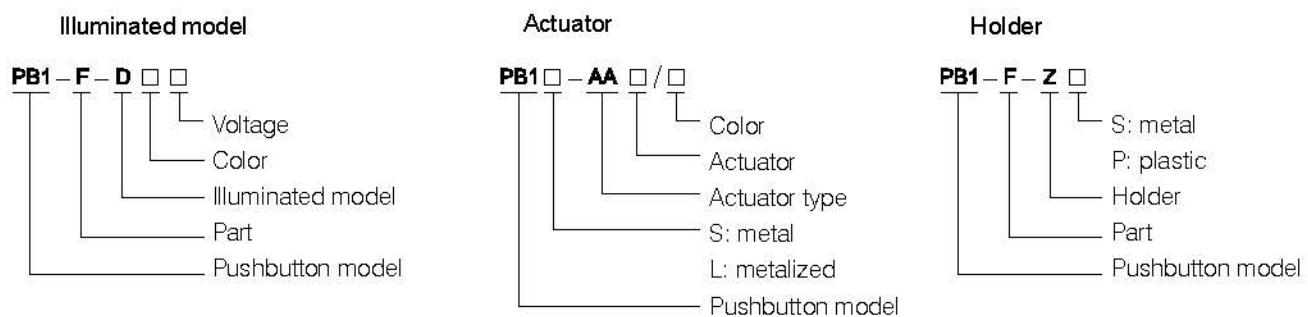


Part model & Model

Model



Part model




Technical Data

Technical data

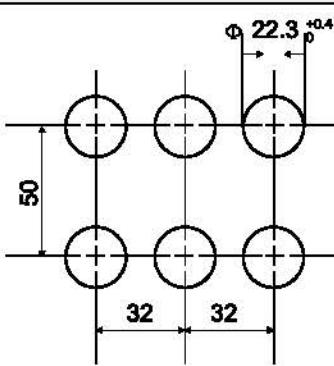
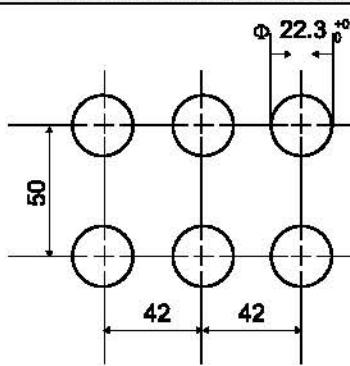
Standards:	IEC60947 Part1, IEC60947 Part 5-1, IEC60947 Part 5-5 GB14048.5, GB14048.1 GB14048.14 ISO13850											
Rated Insulation Voltage Ui:	AC 600V, 50Hz illumination module: AC440V, 50Hz; DC250V											
Rated Impulse Withstand Voltage Uimp:	AC 1890V 50Hz,1min											
Conventional Thermal Current Ith:	10A											
Rated Load:	Load type Rated operation voltage Ue		24V	48V	110V	220V	380V	440V				
	AC-12	Rated operation current Ie	10A	-	10A	10A	10A	10A				
	DC-12		10A	8A	3.5A	1A	-	-				
	AC-15		6A	-	6A	6A	4A	4A				
	DC-13		6A	4A	1.2A	0.4A	-	-				
Illuminated data:	Voltage number	21	22	23	25	26	28	31	32			
	Voltage(V)AC/DC6VAC/DC12VAC/DC24V C/DC48V AC/DC110VDC220VAC220V AC380V											
	Current (mA)	18	17	16	11	18	5	19	12			
Pollution Class:	3											
Mechanical Endurance:	Pushbutton & Illuminated pushbutton& Mushroom pushbutton: 3×10^6 times Selector switch & Compact pushbutton & Twin pushbutton & Maintained pushbutton: 3×10^5 times Key selector switch & E-stop actuator: 5×10^4 times Contact model: 3×10^6 times											
Operating Frequency:	1200 times/1hour											
Electrical Endurance:	5×10^5 times Ie / AC-15 at 6A/220V/230V Min. load: DC24V 5mA											
Operation Temperature:	Operation -25°C -70°C Storage -40°C -80°C											
Protection Class:	IP65	Key selector switch IP54	Contact model and illuminated model IP20									
Shock Amplitude:	$\leq 15\text{g}$ (IEC60068 2-27)											
Impact Amplitude:	$\leq 5\text{g}$ 10-500Hz (IEC60068 2-6)											
Contact Resistance:	$< 50\text{m}\Omega$											
Contact Material:	AgNi10/Cu											

Installation Mounting-hole Dimensions

Installation

<p>1. Installing the actuator into the mounting-hole.</p>	
<p>2. Installing the holder.</p>	
<p>3. Tighten the screws on holder.</p>	
<p>4. Dismantle the switching element or the lighting element: for simply demounting the installed element, hold up the buckle of lock-type installation system with a straight screwdriver.</p>	

Mounting-hole Size





Pushbutton	E-stop pushbutton, Mushroom pushbutton, Select switch with long-handle
	

Notes:

- The tightening torque of wiring screw for switching element is 0.8-1.2Nm.
- The screw tightening torque of metal installation middle seat is no larger than 1Nm, and that of metalized installation middle seat is no larger than 0.8Nm.
- After installing the switching element or the lighting element, check whether the buckle is clipped in completely.

PB1S



Pushbutton/Raised pushbutton/Illuminated pushbutton/Raised illuminated pushbutton

Name	Type	Status	Model	Color	Rated voltage of illumination module	Dimensions
Pushbutton		Momentary Maintained	PB1S-■/▲ PB1S-■T/▲	red-r green-g yellow-y blue-b white-w black-k		
Raised pushbutton		Momentary Maintained	PB1S-■/▲-H PB1S-■T/▲-H	red-r green-g yellow-y blue-b white-w black-k		
Illuminated Pushbutton		Momentary Maintained	PB1S-■D/▲★ PB1S-■TD/▲★	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
Raised illuminated pushbutton		Momentary Maintained	PB1S-■D/▲★-H PB1S-■TD/▲★-H	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. ★ : Rated voltage of illumination module.

Select switch





Name	Type	Status	Model		Color	Dimensions
Select switch with short handle		2 position	L	R 90°	PB1S-■X/▲	
			L	R 90°	PB1S-■X/▲fu	
		3 position	L	R 60° 60°	PB1S-■XS6/▲	
			L	R 60° 60°	PB1S-■XS6/▲f	
			L	R 60° 60°	PB1S-■XS6/▲fu	
			L	R 60° 60°	PB1S-■XS6/▲ffu	
			L	R 90°	PB1S-■CX/▲	
Select switch with long handle		2 position	L	R 90°	PB1S-■CX/▲fu	
			L	R 90°	PB1S-■CXS6/▲	
		3 position	L	R 60° 60°	PB1S-■CXS6/▲	
			L	R 60° 60°	PB1S-■CXS6/▲f	
			L	R 60° 60°	PB1S-■CXS6/▲fu	
			L	R 90°	PB1S-■CXS6/▲ffu	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.

PB1S




Illuminated select switch

Name	Type	Status	Model		Color/ Rated voltage of illumination module	Dimensions
Illuminated select switch with short handle		2 position	L R 90°	PB1S-■XD/▲★	red-r green-g yellow-y blue-b white-w	
			L R 90°	PB1S-■XD/▲★fu		
		3 position	L R 60° 60°	PB1S-■XS6D/▲★	21-AC/DC 6V 22-AC/DC12V 23-AC/DC24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
			L R 60° 60°	PB1S-■XS6D/▲★f		
			L R 60° 60°	PB1S-■XS6D/▲★fu		
			L R 60°	PB1S-■XS6D/▲★fu		
			L R 60°	PB1S-■XS6D/▲★fu		
Illuminated select switch with short handle		2 position	L R 90°	PB1S-■CXD/▲★	red-r green-g yellow-y blue-b white-w	
			L R 90°	PB1S-■CXD/▲★fu		
		3 position	L R 60° 60°	PB1S-■CXS6D/▲★	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
			L R 60° 60°	PB1S-■CXS6D/▲★f		
			L R 60° 60°	PB1S-■CXS6D/▲★fu		
			L R 60°	PB1S-■CXS6D/▲★fu		
			L R 60°	PB1S-■CXS6D/▲★fu		

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. ★ : Rated voltage of illumination module.

Mushroom pushbutton

Name	Type	Status	Model	Color	Rated voltage of illumination module	Dimensions
Mushroom pushbutton		Momentary	PB1S-■M/▲	red-r green-g yellow-y blue-b white-w black-k		
Illuminated mushroom pushbutton		Momentary	PB1S-■MD/▲★	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
Pull to release mushroom pushbutton		Latching	PB1S-■ML/▲	red-r green-g yellow-y blue-b white-w black-k		

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. ★ : Rated voltage of illumination module.
4. Diameter of mushroom actuator: No mark: Ø40mm, 30: Ø30mm, 60: Ø60mm.

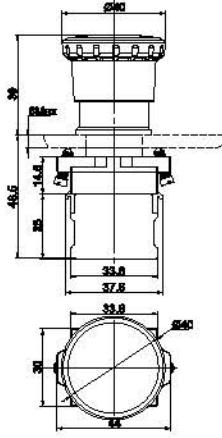
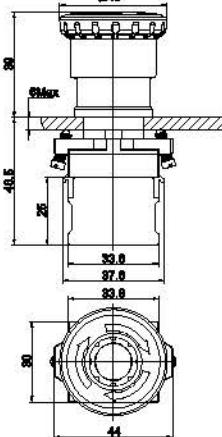
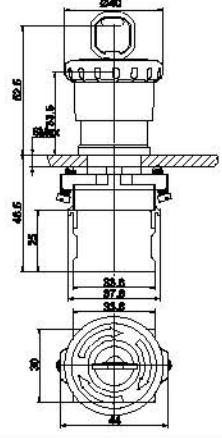
PB1S**Emergency-stop pushbutton**

Name	Type	Status	Model	Color	Dimensions
Pull to release E-stop pushbutton		Latching	PB1S-■ZL/▲	red-r	
Twist to release E-stop pushbutton		Latching	PB1S-■ZR/▲	red-r	
Key to release E-stop pushbutton		Latching	PB1S-■ZY/▲	red-r	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. The pull to release E-stop pushbutton only have Φ40mm series.
The twist to release pushbutton and key to release pushbutton have Ø30mm、Ø40mm series.

PB1S**Emergency-stop pushbutton with trigger action**

Name	Type	Status	Model	Color	Dimensions
Pull to release E-stop pushbutton with trigger action		Latching	PB1S-■ZLA▲	red-r	
Twist to release E-stop pushbutton with trigger action		Latching	PB1S-■ZRA▲	red-r	
Key to release E-stop pushbutton with trigger action		Latching	PB1S-■ZYA▲	red-r	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
- 3.The pull to release E-stop pushbutton only have Ø40mm series.
The twist to release pushbutton and key to release pushbutton have Ø30mm, Ø40mm series.



PB1S**Key-operated switch**

Name	Type	Status	Model		Key removal positions	Dimensions
Key-operated switch		2 position	L 	R 90°	PB1S-■Y/▲	<p>L: removal from left C: removal from center R: removal from right E: removal from any position</p>
			L 	R 90°	PB1S-■Y/▲fu	
			L 	R 90°	PB1S-■Y9/▲fu	
		3 position	L 	R 60°	PB1S-■YS6/▲	
			L 	R 60°	PB1S-■YS6/▲f	
			L 	R 60°	PB1S-■YS6/▲fu	
			L 	R 60°	PB1S-■YS6/▲ffu	

Notes:

- : The type of contact module.
- ▲ : Key removal positions.

PB1S**Twin pushbutton**





Name	Type	Model	Color	Rated voltage of illumination module	Dimensions
Twin pushbutton		PB1S-■R/▲▲	r-red g-green		
Illuminated twin pushbutton		PB1S-■RD/▲▲▲★	r-red g-green	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	

Notes:

1. ■ : The type of contact module.
2. The first and second ▲ : The color of handle.
3. The third ▲ : The color of illuminated module.
4. ★ : Rated voltage of illumination module.

PB1L



Pushbutton/Raised pushbutton/Illuminated pushbutton/Raised illuminated pushbutton

Name	Type	Status	Model	Color	Rated voltage of illumination module	Dimensions
Pushbutton		Momentary	PB1L-■/▲	red-r green-g yellow-y blue-b white-w black-k		
		Maintained	PB1L-■T/▲			
Raised pushbutton		Momentary	PB1L-■/▲-H	red-r green-g yellow-y blue-b white-w black-k		
		Maintained	PB1L-■T/▲-H			
Illuminated pushbutton		Momentary	PB1L-■D/▲★	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
		Maintained	PB1L-■TD/▲★			
Raised illuminated pushbutton		Momentary	PB1L-■D/▲★-H	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
		Maintained	PB1L-■TD/▲★-H			

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. ★ : Rated voltage of illumination module.

PB1L**Select switch**

Name	Type	Status	Model		Color	Dimensions
Select switch with short handle		2 position	L	R 90°	PB1L-■X/▲	
			L	R 80°	PB1L-■X/▲fu	
		3 position	L	R 60°	PB1L-■XS6/▲	
			L	R 60°	PB1L-■XS6/▲f	
			L	R 80°	PB1L-■XS6/▲fu	
			L	R 60°	PB1L-■XS6/▲ffu	
			L	R 80°	PB1L-■XS6/▲ffu	
Select switch with long handle		2 position	L	R 90°	PB1L-■CX/▲	
			L	R 90°	PB1L-■CX/▲fu	
		3 position	L	R 60°	PB1L-■CXS6/▲	
			L	R 60°	PB1L-■CXS6/▲f	
			L	R 80°	PB1L-■CXS6/▲fu	
			L	R 80°	PB1L-■CXS6/▲ffu	
			L	R 60°	PB1L-■CXS6/▲ffu	


Notes:

1. ■ : The type of contact module.

2. ▲ : The color of handle.

PB1L




Illuminated select switch

Name	Type	Status	Model		Rated voltage of illumination module	Dimensions	
Illuminated select switch with short handle		2 position		PB1L-■XD/▲★	red-r green-g yellow-y blue-b white-w		
				PB1L-■XD/▲★fu			
		3 position		PB1L-■XS6D/▲★	21-AC/DC 6V 22-AC/DC12V 23 AC/DC24V 25-AC/DC48V 26-AC/DC110V 28 DC220V 31-AC220V 32-AC380V		
				PB1L-■XS6D/▲★f			
				PB1L-■XS6D/▲★fu			
				PB1L-■XS6D/▲★fu			
				PB1L-■XS6D/▲★fu			
				PB1L-■CXD/▲★	red-r green-g yellow-y blue-b white-w		
				PB1L-■CXD/▲★fu			
				PB1L-■CXS6D/▲★			
				PB1L-■CXS6D/▲★f			
				PB1L-■CXS6D/▲★fu			
				PB1L-■CXS6D/▲★fu			

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. ★ : Rated voltage of illumination module.


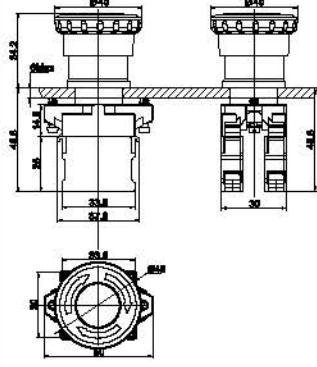
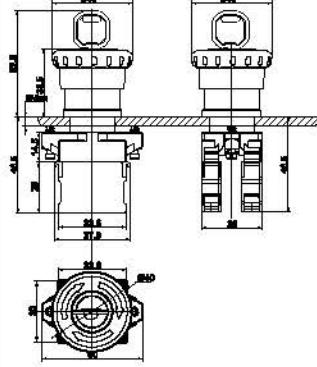
Mushroom pushbutton

Name	Type	Status	Model	Color	Rated voltage of illumination module	Dimensions
Mushroom pushbutton		Momentary	PB1L-■M/▲	red-r green-g yellow-y blue-b white-w black-k		
Illuminated Mushroom pushbutton		Momentary	PB1L-■MD/▲★	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	
Pull to release mushroom pushbutton		Latching	PB1L-■ML/▲	red-r green-g yellow-y blue-b white-w black-k		

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. ★ : Rated voltage of illumination module.
4. Diameter of mushroom actuator: No mark: Ø40mm, 30: Ø30mm, 60: Ø60mm.

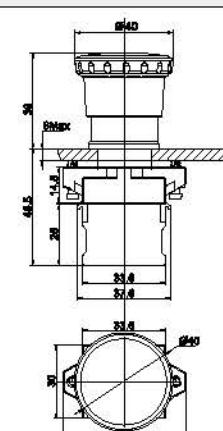
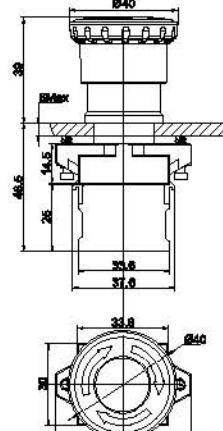
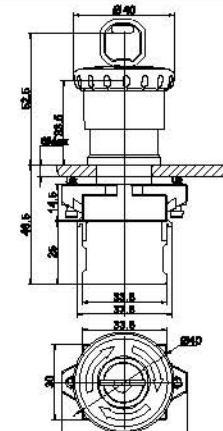
PB1L**Emergency-stop pushbutton**

Name	Type	Status	Model	Color	Dimensions
Pull to release E-stop pushbutton		Latching	PB1L-■ZL/▲	red-r	
Twist to release E-stop pushbutton		Latching	PB1L-■ZR/▲	red-r	
Key to release E-stop pushbutton		Latching	PB1L-■ZY/▲	red-r	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. The pull to release E-stop pushbutton only have Ø40mm series.
The twist to release pushbutton and key to release pushbutton have Ø30mm、Ø40mm series.


PB1L**Emergency-stop pushbutton with trigger action**

Name	Type	Status	Model	Color	Dimensions
Pull to release E-stop pushbutton with trigger action		Latching	PB1L-■ZLA/▲	red-r	
Twist to release E-stop pushbutton with trigger action		Latching	PB1L-■ZRA/▲	red-r	
Key to release E-stop pushbutton with trigger action		Latching	PB1L-■ZYA/▲	red-r	

Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.
3. The pull to release E-stop pushbutton only have Ø40mm series.
The twist to release pushbutton and key to release pushbutton have Ø30mm, Ø40mm series.



PB1L**Key-operated switch**

Name	Type	Status	Model		Key removal positions	Dimensions
Key-operated switch		2 position	L R 90°	PB1L-■Y/▲	L: removal from left C: removal from center R: removal from right E: removal from any position	
			L R 90°	PB1L-■Y/▲fu		
		3 position	L R 90°	PB1L-■Y9/▲fu		
		60°	L R 60°	PB1L-■YS6/▲		
			L R 60°	PB1L-■YS6/▲f		
		60°	L R 60°	PB1L-■YS6/▲fu		
			L R 60°	PB1L-■YS6/▲ffu		

Notes:

1. ■ : The type of contact module.
2. ▲ : Key removal positions.

Twin pushbutton

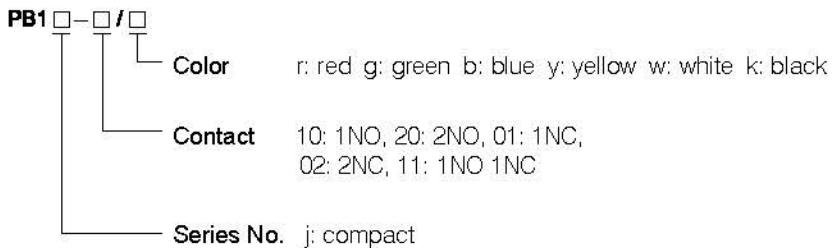
Name	Type	Model	Color	Rated voltage of illumination module	Dimensions
Twin pushbutton		PB1L-■R/▲▲	red-r green-g		
Illuminated twin pushbutton		PB1L-■RD/▲▲▲★	red-r green-g	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	

Notes:

1. ■ : The type of contact module.
2. The first and second ▲ : The color of handle.
3. The third ▲ : The color of illuminated module.
4. ★ : Rated voltage of illumination module.

PB1J

Model



Technical Data

Standards:	IEC60947 Part1, IEC60947 Part 5-1, GB14048.5, GB14048.1
Rated Insulation Voltage Ui:	AC 300V, 50Hz
Rated Impulse Withstand Voltage Uimp:	AC 1500V 50Hz.1min
Conventional Thermal Current Ith:	5A
Rated load:	AC-15 230V 2A DC-13 24V 1A
Pollution class:	III
Mechanical endurance:	3X10 ⁵ times
Electrical endurance:	1X10 ⁵ times
Operation temperature:	Operation -25°C -70°C Storage -40°C -80°C
Protection class:	IP65
Shock amplitude:	≤15g (IEC60068 2-27)
Impact amplitude:	≤5g (IEC60068 2-6)
Contact resistance:	< 50mΩ
Contact material:	AgNi10/Cu

PB1J**Pushbutton**

Name	Type	Status	Model	Color	Dimensions
Pushbutton		Momentary	PB1J-■/▲	red-r green-g yellow-y blue-b white-w	


Notes:

1. ■ : The type of contact module.
2. ▲ : The color of handle.

PB1J

Model

PL1-D □ / □ □ □



21: AC/DC 6V 22: AC/DC 12V 23: AC/DC 24V
25: AC/DC48V 26: AC/DC 110V 28: DC 220V
31: AC 220V 32: AC 380V


Color r: red g: green b: blue y: yellow w: white

Printing No mark: without printing Sxy: please referring to page 32、33.

Technical Data

Standards:	IEC60947 Part1, IEC60947 Part 5-1, GB14048.5, GB14048.1							
Rated Insulation Voltage Ui:	AC440V DC250V							
Rated Impulse Withstand Voltage Uimp:	6KV							
Rated Current of Indicator Light:	Voltage code 21 22 23 25 26 28 31 32							
	Voltage (V) AC/DC 6V AC/DC 12V AC/DC 24V AC/DC48V AC/DC110V DC220V AC220V AC380V							
	Current (mA) 18 18 18 18 16 12 16 17							
Electrical endurance:	≥ 30000 hours							
Insulation Resistance:	$\geq 2M\Omega$							
Operation temperature:	Operation -25°C -70°C Storage -40°C -80°C							
Operation Voltage Fluctuation:	$\leq 110V: \pm 10%$ > 110V: $\pm 20\%$							
Luminance:	100cd/m ²							
CTI:	≥ 100							
Operation frequency:	AC50~60Hz							
Protection Class:	IP65							
Vibration amplitude:	Max. acceleration: 0.7g Frequency: 2~80Hz							
Relative Air Humidity:	$\leq 98\%$							
Pollution Class:	III							
Tightening torque:	0.8Nm							
Conductor cross-sections:	Max. 1.5mm ² Min.1.0mm ² 2x1 to 1.5 mm ²							

PL1 Indicator Light


Name	Type	Model	Color	Rated voltage	Dimensions
Indicator light		PL1-D■/▲★	red-r green-g yellow-y blue-b white-w	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	

Notes:

1. ■ : Printing content (No mark: without printing Sxy: please referring to page 32、33)
2. ▲ : The color of indicator light.
3. ★ : The rated voltage of indicator light.

Accessories

Accessories

Name	Type	Model	Description	Function
Momentary pushbutton		PB1S-AA/▲ PB1L-AA/▲	▲ : color r-red g-green b-blue y-yellow w-white k-black	
Maintained pushbutton		PB1S-AAT/▲ PB1L-AAT/▲		
Illuminated momentary pushbutton		PB1S-AAD/▲ PB1L-AAD/▲	▲ : color r-red g-green b-blue y-yellow w-white k-black	
Illuminated maintained pushbutton		PB1S-AATD/▲ PB1L-AATD/▲		
Raised momentary pushbutton		PB1S-AA/▲H PB1L-AA/▲H	▲ : color r-red g-green b-blue y-yellow w-white k-black	
Raised maintained pushbutton		PB1S-AAT/▲H PB1L-AAT/▲H		
Raised illuminate momentary pushbutton		PB1S-AAD/▲H PB1L-AAD/▲H	▲ : color r-red g-green b-blue y-yellow w-white k-black	
Raised illuminate maintained pushbutton		PB1S-AATD/▲H PB1L-AATD/▲H		
Select switch with short handle		2 position PB1S-AAX/▲ PB1L-AAX/▲	▲ : color r-red g-green b-blue y-yellow w-white k-black Reset function code after the color.	Actuator
Select switch with long handle		3 position PB1S-AAXS6/▲ PB1L-AAXS6/▲		
Select switch with long handle		2 position PB1S-AACX/▲ PB1L-AACX/▲	▲ : color r-red g-green b-blue y-yellow w-white k-black Reset function code after the color.	
Illuminate select switch with short handle		3 position PB1S-AACXS6/▲ PB1L-AACXS6/▲		
Illuminate select switch with long handle		2 position PB1S-AAXD/▲ PB1L-AAXD/▲	▲ : color r-red g-green b-blue y-yellow w-white k-black Reset function code after the color.	
Illuminate select switch with long handle		3 position PB1S-AAXS6D/▲ PB1L-AAXS6D/▲		
Key-operated switch		2 position PB1S-AAY/ PB1L-AAY/ PB1S-AAY9/ PB1L-AAY9/	The key removal position and reset function code after "/". g:  e: 	
		3 position PB1S-AAYS6/ PB1L-AAYS6/		

Accessories

Accessories

Name	Type	Model			Description	Function		
Mushroom pushbutton		30mm	Momentary	PB1S-AAM/▲-30 PB1L-AAM/▲-30	▲: color r-red g-green b-blue y-yellow w-white k-black			
		40mm	Momentary	PB1S-AAM/▲ PB1L-AAM/▲				
		60mm	Momentary	PB1S-AAM/▲-60 PB1L-AAM/▲-60				
Illuminated mushroom pushbutton (Momentary)		30mm	PB1S-AAMD/▲-30 PB1L-AAMD/▲-30			Actuator		
		40mm	PB1S-AAMD/▲ PB1L-AAMD/▲					
		60mm	PB1S-AAMD/▲-60 PB1L-AAMD/▲-60					
Pull to release mushroom pushbutton (Latching)		40mm	PB1S-AAML/▲ PB1L-AAML/▲					
		60mm	PB1S-AAML/▲-60 PB1L-AAML/▲-60					
Pull to release E-stop pushbutton		40mm	PB1S-AAZL/r PB1L-AAZL/r			red		
Pull to release E-stop pushbutton with trigger action		40mm	PB1S-AAZLA/r PB1L-AAZLA/r			red		
Twist to release E-stop pushbutton		30mm	PB1S-AAZR/r-30 PB1L-AAZR/r-30			red		
		40mm	PB1S-AAZR/r PB1L-AAZR/r					
Twist to release E-stop pushbutton with trigger action		40mm	PB1S-AAZRA/r PB1L-AAZRA/r			red		
Key to release E-stop pushbutton		30mm	PB1S-AAZY/r-30 PB1L-AAZY/r-30			red		
		40mm	PB1S-AAZY/r PB1L-AAZY/r					
Key to release E-stop pushbutton with trigger action		40mm	PB1S-AAZYA/r PB1L-AAZYA/r			red		

Accessories

Accessories

Name	Type	Model	Description	Function
Twin pushbutton		PB1S-AAR/▲▲ PB1L-AAR/▲▲	▲ : color r-red g-green	Actuator
Illuminated twin pushbutton		PB1S-AARD/▲▲ PB1L-AARD/▲▲		

Accessories

Accessories

Name	Type	Model	Description	Function
Contact module		PB1-F-C10	1NO	Contact module Contact module
		PB1-F-C01	1NC	
Illuminated module		PB1-F-D/▲★	▲: Color ★ : Rated voltage	Illuminated module
Holder		PB1-F-ZS	S: metal	Holder
		PB1-F-ZP	P: Plastic	
Seal cover		PB1-F-M1	Only PB1S use	Select and use
		PB1-F-M2	Only PB1L use	
Protecting cover		F1	IP65	Select and use
		F2	Metal	Select and use

Accessories

Accessories

Name	Type	Model		Description	Function
Protective cap		F3-1		Plastic	
		F3-2		Plastic	
		F3-3		Plastic	
Installing ring		F7		Φ30mm	Select and use
Label holder		PB1-F-B11-10 书写面积25×10mm PB1-F-B11-18 书写面积25×18mm		Φ22.5mm	
Label panel		PB1-F-B12		Φ22.5mm	
Yellow name plate		F13-60 F13-90	Φ60 Φ90	Φ22.5mm	Used for emergency-stop pushbutton
		F14a-40 F14a-60	Φ40 Φ60		
		F14b-60 F14b-90	Φ60 Φ90		

Accessories

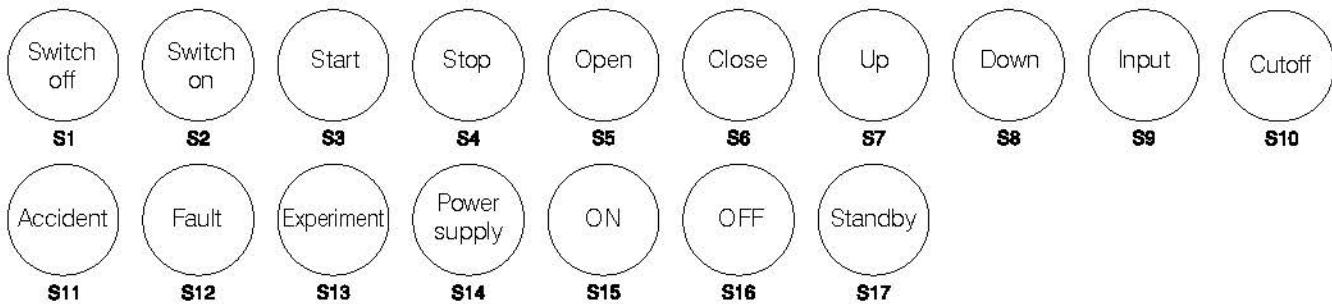
Accessories

Name	Type	Model		Description	Function
E-stop pushbutton protective cover		PB1-F-PC-a60		Φ22.5mm	Used for emergency-stop pushbutton
		PB1-F-PC-b60 PB1-F-PC-b90		Φ22.5mm	
Indicator light installing ring		F15-25 F15-30	Φ25 Φ30	Special for indicator light	
Indicator light insert label		F-18	POM	Printing	Select and use
Blanking plugs		F19	Φ22	Injection molding	

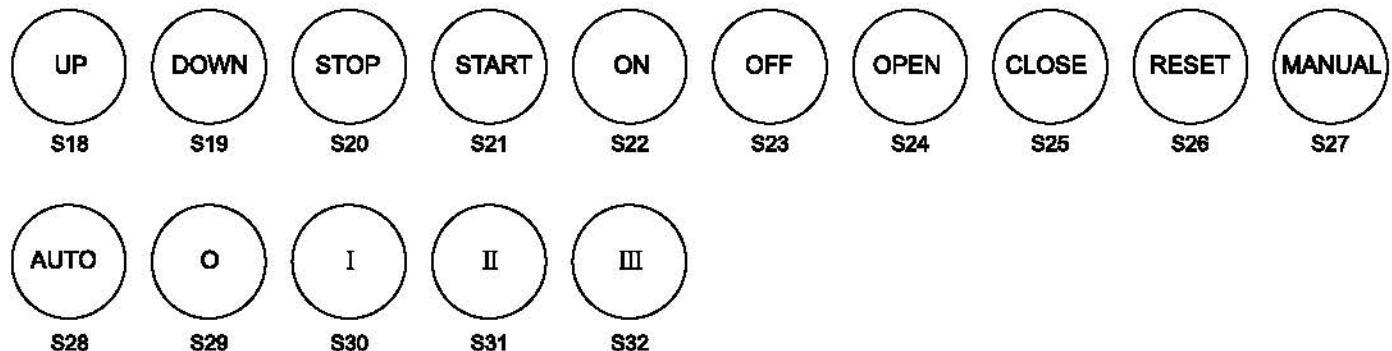
Printing symbol

Printing symbol

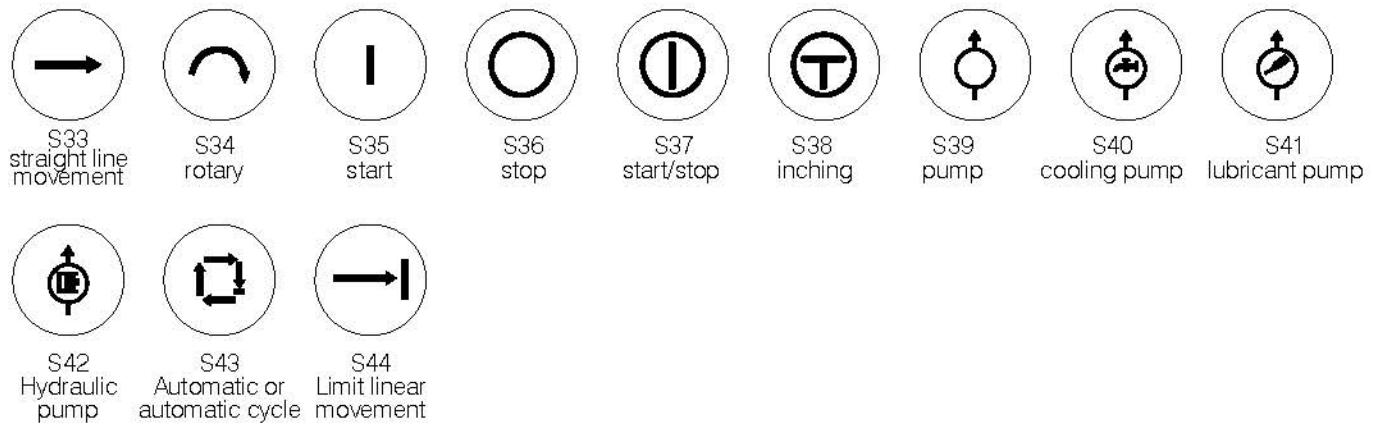
Chinese symbol



Standard symbol



ISO symbols



Accessories

Printing symbol

Stop SX1	Start SX2	Switch off Switch on SX3	Manual Automatic SX4	Close SX5	Open SX6	Inspection Reset SX7	I O SX8	O I SX9	I O II SX10	II O I SX11	1 0 2 SX12	OFF-ON SX13	STOP-START SX14	HAND-AUTO SX15	REV-FOR SX16
-------------	--------------	-----------------------------	-------------------------	--------------	-------------	-------------------------	------------	------------	----------------	----------------	---------------	----------------	--------------------	-------------------	-----------------



www.china-apt.com

Siemens Electrical Apparatus Ltd., Suzhou, APT Sales and Marketing
Rm 301, Tsidi Building No.55, Lane 777, West Guangzhong Road Shanghai
Zip Code: 200072
TEL: (021) 56553757
URL: <http://www.china-apt.com>
FAX: (021) 56551750
E-mail: sales@china-apt.com

