





Twin pushbutton


Name	Type	Model	Color	Rated voltage of illumination module	Dimensions
Twin pushbutton		PB1L-■R/▲▲	red-r green-g		
Illuminated twin pushbutton		PB1L-■RD/▲▲▲★	red-r green-g	21-AC/DC 6V 22-AC/DC 12V 23-AC/DC 24V 25-AC/DC48V 26-AC/DC110V 28-DC220V 31-AC220V 32-AC380V	

Notes:

1. ■ : The type of contact module.
2. The first and second ▲ : The color of handle.
3. The third ▲ : The color of illuminated module.
4. ★ : Rated voltage of illumination module.

PB1J

Model

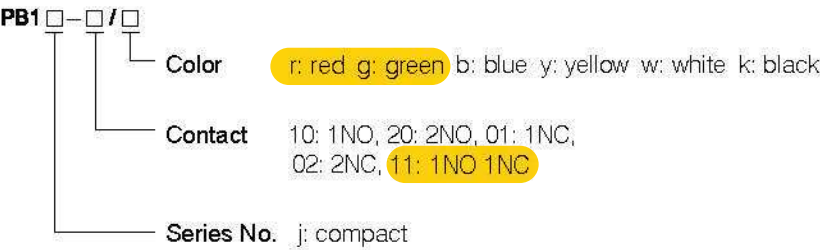

Technical Data

Standards:	IEC60947 Part1, IEC60947 Part 5-1, GB14048.5, GB14048.1
Rated Insulation Voltage Ui:	AC 300V, 50Hz
Rated Impulse Withstand Voltage Uimp:	AC 1500V 50Hz.1min
Conventional Thermal Current Ith:	5A
Rated load:	AC-15 230V 2A DC-13 24V 1A
Pollution class:	III
Mechanical endurance:	3X10 ⁵ times
Electrical endurance:	1X10 ⁵ times
Operation temperature:	Operation -25℃ -70℃ Storage -40℃ -80℃
Protection class:	IP65
Shock amplitude:	≤15g (IEC60068 2-27)
Impact amplitude:	≤5g (IEC60068 2-6)
Contact resistance:	< 50mΩ
Contact material:	AgNi10/Cu