

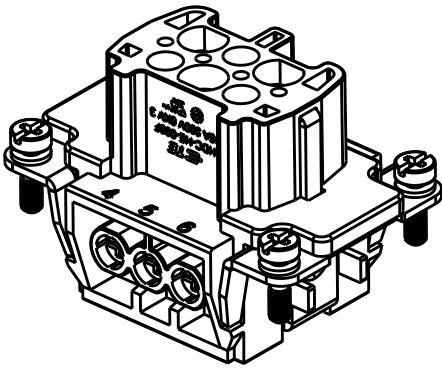


REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	04APR2015	GY	CW
	B	ECR-15-013759	27SEP	DW	CW
	B1	ECR-16-011988	24AUG2016	YC	CW
	B2	ECR-18-017123	21DEC2018	KW	CW

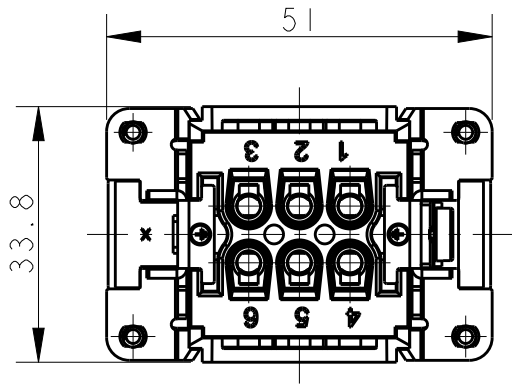

TYPE 1,T2040062201-000,WITH LOGO  
类型 1,T2040062201-000,带LOGO

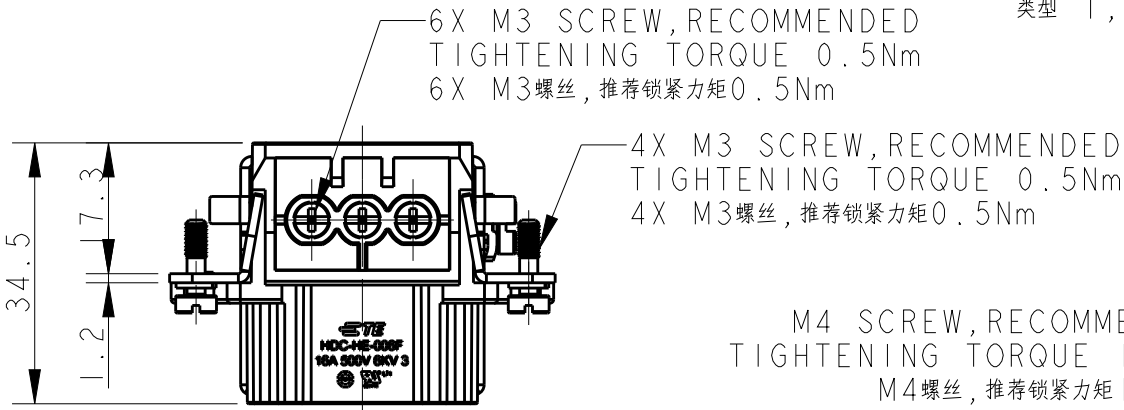

M4 SCREW,RECOMMENDED  
TIGHTENING TORQUE 1.2Nm  
M4螺丝,推荐锁紧力矩1.2Nm

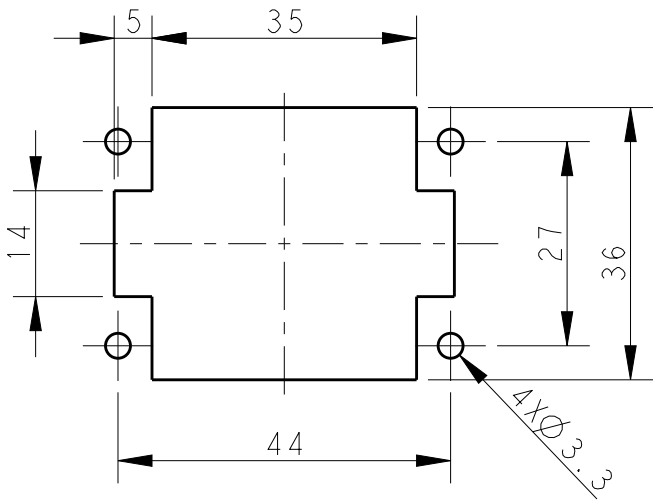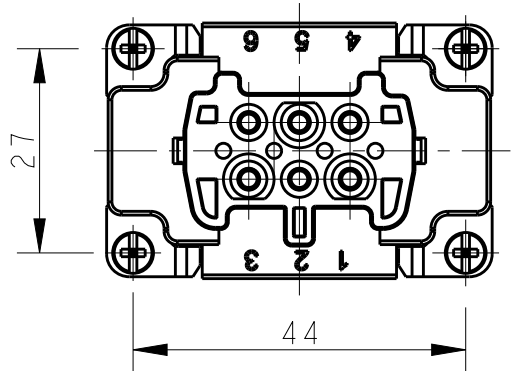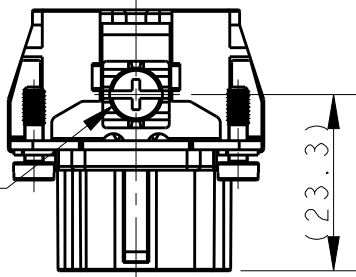

PANEL CUT FOR INSERTS FOR USE  
WITHOUT HOODS/ HOUSINGS  
不使用防护外壳时芯件的安装开孔图

NOTES:  
1. TECHNICAL CHARACTERISTICS:  
INSULATION MATERIAL: PC  
RATED VOLTAGE: 500V  
RATED CURRENT: 16A  
INSULATION RESISTANCE:  $\geq 400M\Omega$   
RATED IMPULSE VOLTAGE: 6KV  
POLLUTION DEGREE: 3  
FLAMMABILITY: UL94V-0  
MATING CYCLES: 500 CYCLES  
WIRE RANGE: 0.5mm<sup>2</sup>~2.5mm<sup>2</sup> (AWG20-AWG14)  
CONTACT TYPE: SCREW CLAMP (M3)

注释:  
1. 技术参数:  
绝缘材料: PC  
额定电压: 500V  
额定电流: 16A  
绝缘电阻:  $\geq 400M\Omega$   
脉冲电压: 6KV  
污染等级: 3  
阻燃等级: UL94V-0  
插拔次数: 500 次  
接线范围: 0.5mm<sup>2</sup>~2.5mm<sup>2</sup> (AWG20-AWG14)  
接线类型: 螺丝压接 (M3)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH
-	-
-	-

DWN	GINO YAO	05APR2015
CHK	CHRIS WANG	05APR2015
APVD	XIANG XU	05APR2015
PRODUCT SPEC	108-137044	
APPLICATION SPEC	114-137044	
WEIGHT	-	
CUSTOMER DRAWING		



NAME  
HE-006-F


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2040062201000	
SCALE	1:1	SHEET 1 OF 2	REV B2

REVISIONS










P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

NOTE:  
ALL SPEC REFER TO TYPE 1

注释:  
所有产品规范参照 TYPE 1

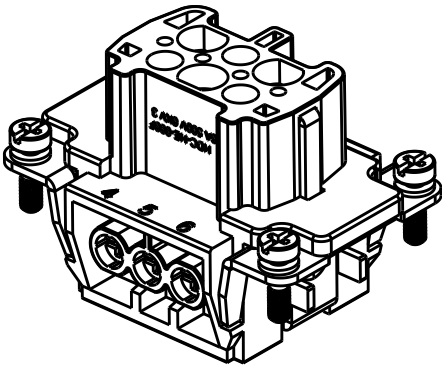



TYPE 3, T2049062201-000, WITHOUT LASER TE LOGO  
类型 3, T2049062201-000, 不带激光LOGO

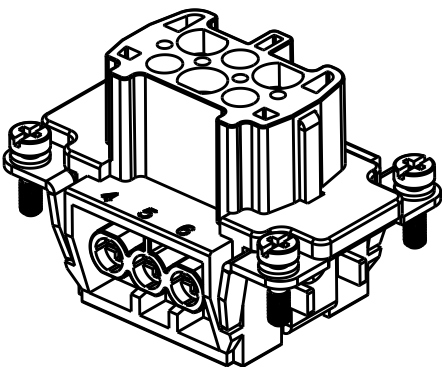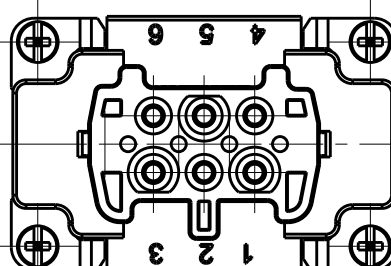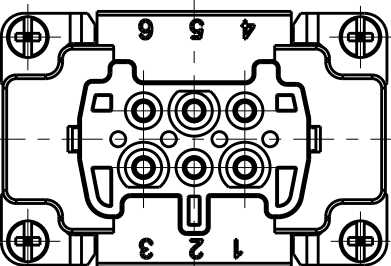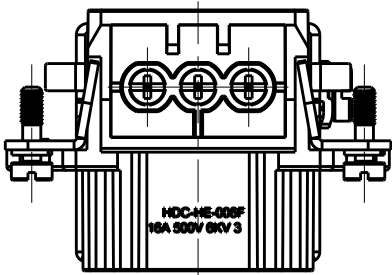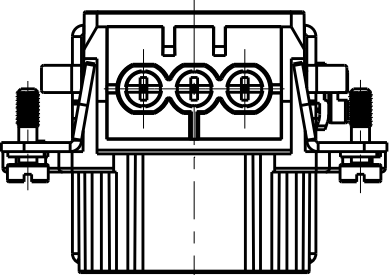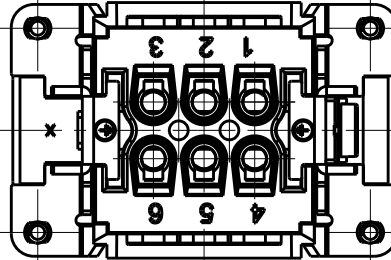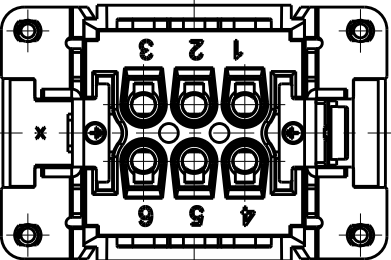

TYPE 2, T2040062201-001, WITHOUT LASER SIDE MARK  
类型 2, T2040062201-001, 不带激光侧面标识

T2040062201-000	HE-006-F	HE-006 FEMALE INSERT HE-006 母插	TYPE 1
T2040062201-001	HE-006-F	HE-006 FEMALE INSERT, WITHOUT LASER SIDE MARK HE-006 母插, 无激光侧面标识	TYPE 2
T2049062201-000	HE-006-F	HE-006 FEMALE INSERT, WITHOUT LOGO HE-006 母插, 无LOGO	TYPE 3
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GINO YAO 05APR2015	 TE Connectivity	
		CHK CHRIS WANG 05APR2015		
		APVD XIANG XU 05APR2015		
		PRODUCT SPEC 108-137044		
DIMENSIONS: mm		APPLICATION SPEC 114-137044	NAME HE-006-F	
		WEIGHT -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779
MATERIAL -			DRAWING NO T2040062201000	RESTRICTED TO
FINISH -			SCALE 1:1	SHEET 2 OF 2
			REV B2	