


3x CARBIDE PERMIT INTERLOCK


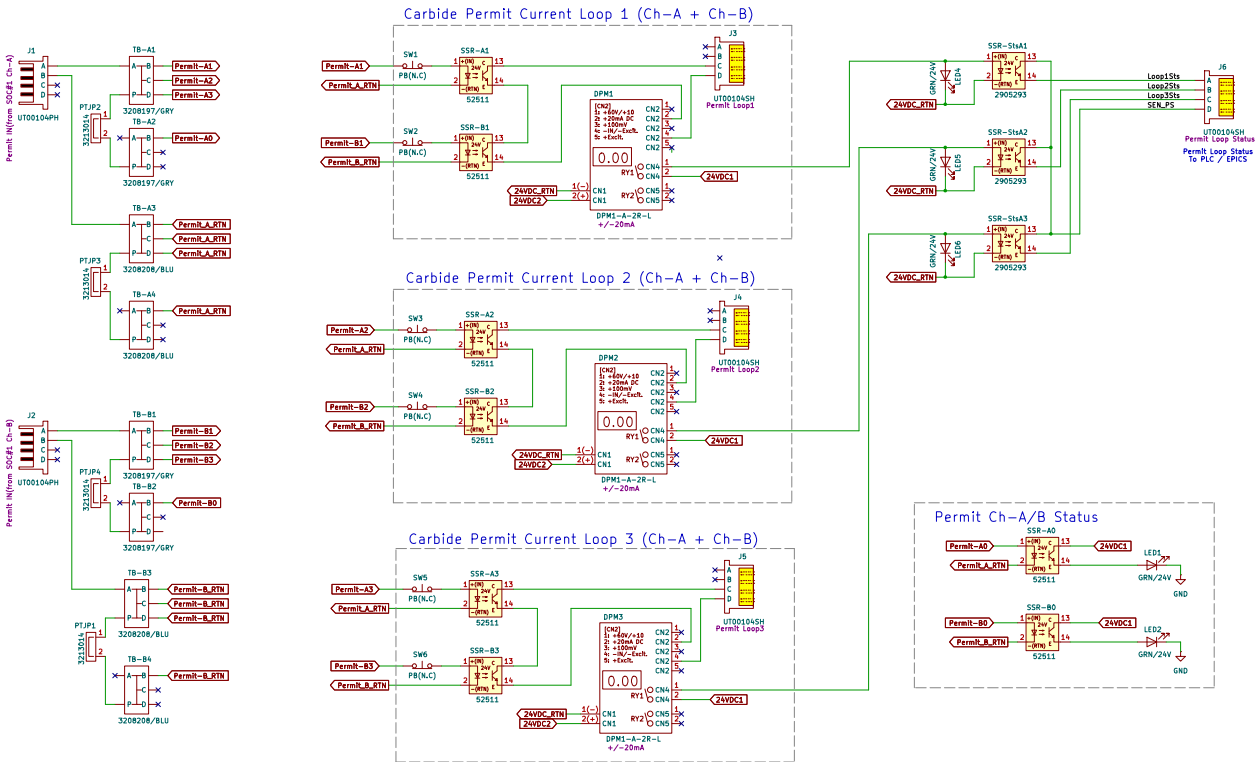


Note:
24VDC1: Indicators
24VDC2: DPM1 to 3


Murrelelectronix, Inc.
52511 / MRO TR 24VDC 20KHZ IN=1MA OPTO-
Long lead time

CHKR: J.P
ENGR: J.Park
SLAC
Sheet: /3xCarbide Permit ILK/
File: 3xCarbide Permit ILK.kicad_sch
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK
Size: B Date: 2026-08-14
KICad E.D.A. 10.0.5

Rev 1
Id: 1/2

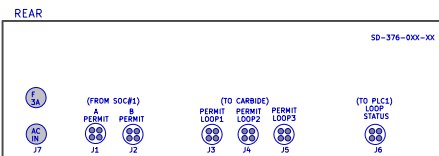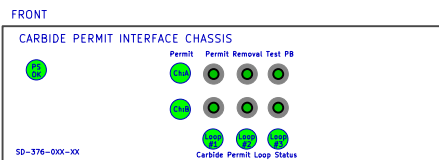

For reference:
NOT TO SCALE

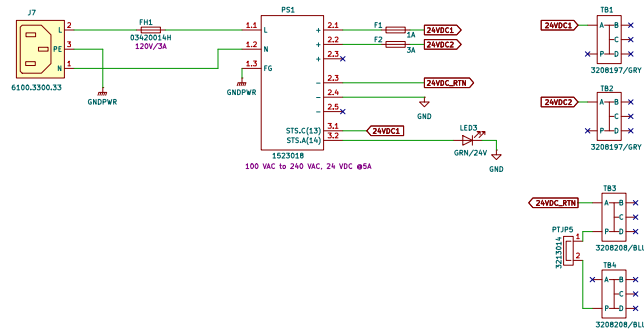

PARTIAL_LASER_STOP(X13.9-21): Current-loop (5V, 40 mA max.)
SYSTEM_STATUS(X513.19-1): TTL OUT(5V,50mA max.)

TOP: 5VDC 48VDC0.5A // Item No.2773760000
TERMS: compact, Solid-state, relay
Rated control voltage: 5 V DC $\pm 20\%$
Rated switching voltage: 5-48 V DC
Continuous current: 500 mA, PUSH IN
Rated control voltage: 5 V DC $\pm 20\%$
Nominal control current: 1.4 mA DC



40% (UT0810-4SH)
A > #12 (SV-OUT)
B > #9 (IN)
C > #12 (TTL-OUT)
D > #12 (GND)*
*GND: 1-9 & 12

UT0810-4SH
Souriau

AWG20
~3ft*
(*appropriate length)

BCS Permit Cable for Carbide XS13 Interface

CHKR: J.P
ENGR: J.Park
SLAC
Sheet: //PS_CONN/
File: conn.kicad_sch
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK
Size: B Date: 2026-08-14 Rev: 1
Kicad E.D.A. 10.0.5 Id: 2/2