


3x CARBIDE PERMIT INTERLOCK

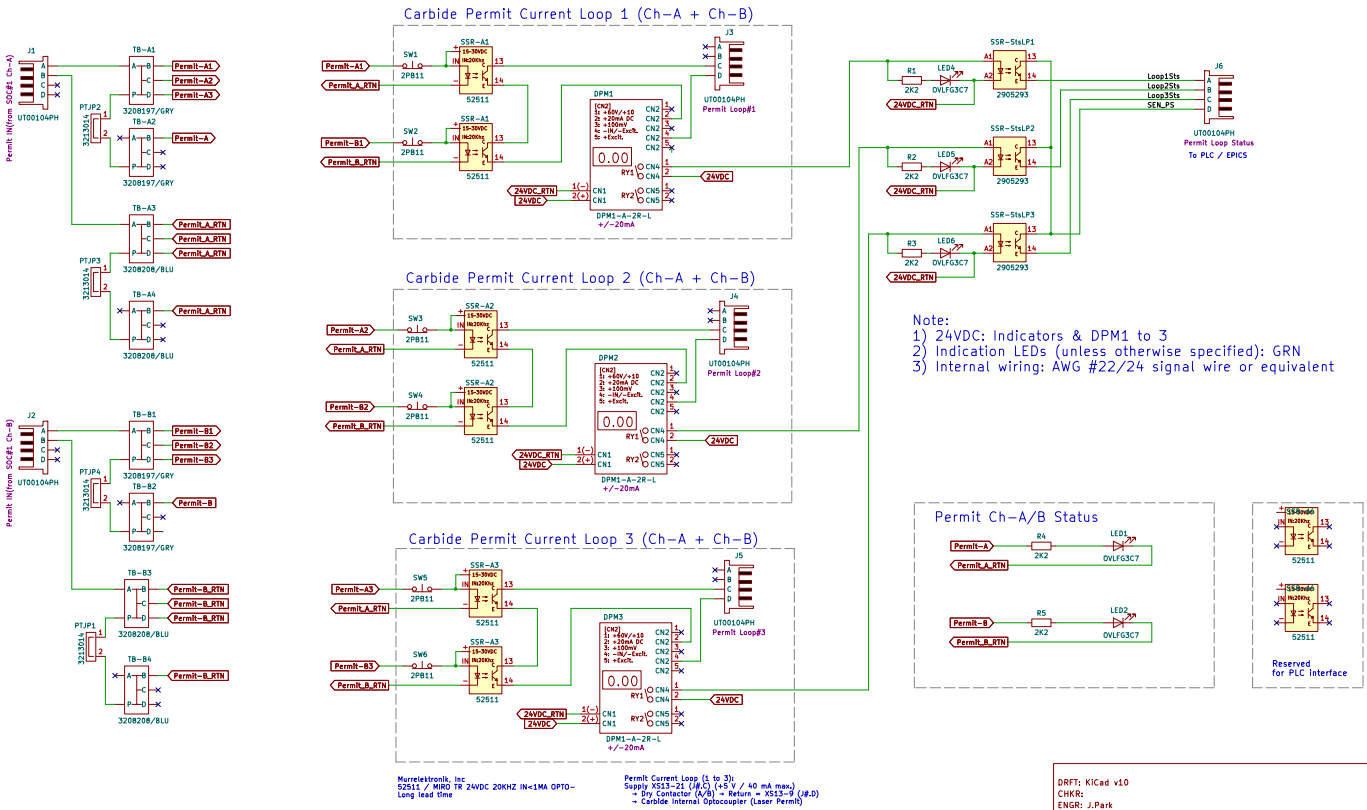


DRFT: KICad v10	
CHKR:	
ENGR: J.Park	
SLAC	
Sheet: /3xCarbide Permit ILK/	
File: 3xCarbide Permit ILK.kicad_sch	
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK	
Size: B	Date: 2026-08-23
KICad E.D.A. 10.0.5	Rev: 1.03
	Id: 1/3

FRONT

CARBIDE PERMIT INTERFACE CHASSIS



REAR

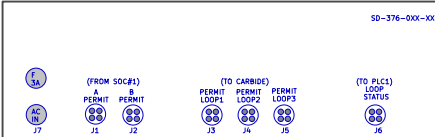

For reference:
NOT TO SCALE

(3x)

Carbide Permit Interface Cable Connection Example



CARBIDE LASER
(1-OF-5)

4Pin/P (UT0610-4SH)

A > #21(SV-OUT)

B > #9 (IN)

C > #19 (FIL-OUT)

D > #12 (GND)*

*GND: 1-5 & 1-2

C/D Not use




UT0610-4SH
Souriau

BCS Permit Cable for Carbide XS13 Interface





PARTIAL_LASER_STOP(X13.9-21): Current-loop (5V, 40 mA max.)

TOPIL 5VDC 48VDC0.5A // Item No.2773760000
TEMPERERES-compact: Solid-state relay.
Rated control voltage: 5 V DC $\pm 20\%$.
Rated switching voltage: 5-48 V DC.
Continuous current: 550 mA. PUSH IN
Rated control voltage: 5 V DC $\pm 20\%$
Nominal control current: 4.4 mA DC

Ref. CONN of the AGM chassis

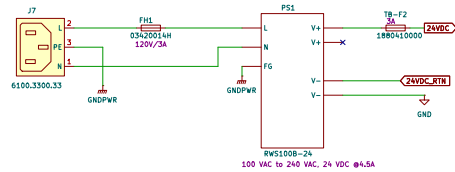

Related accessories

Key SSR
-Switch off characteristics

DRFT: Kicad v10

CHKR:

ENGR: J.Park

SLAC

Sheet: //PS_CONN/

File: conn.kicad_sch

Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK



Size: B Date: 2026-08-23

Kicad E.D.A. 10.0.5

Rev: 1.03

Id: 2/3

Carbide Permit Interface Cable Assembly Drawing

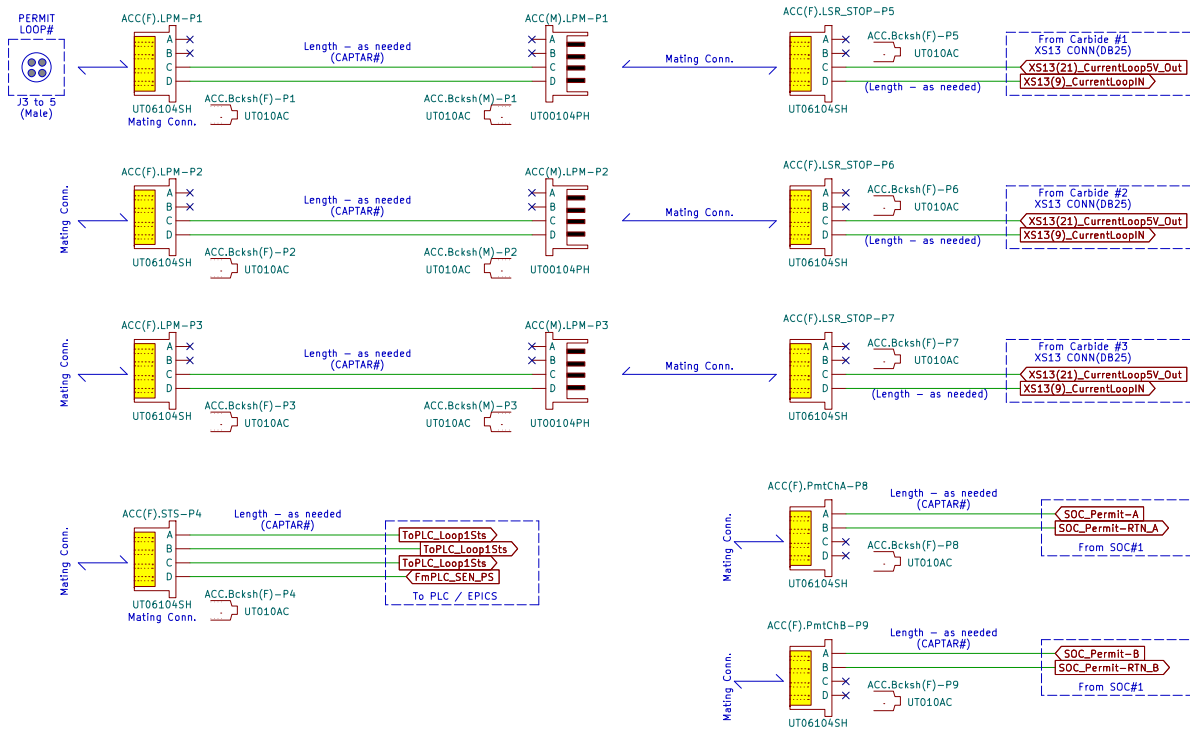

Inline connector assembly

CHKR:	
ENGR: J.Park	
SLAC	
Sheet: /Interface Cable/	
File: interface_cable.kicad_sch	
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK	
Size: A4	Date: 2026-08-21
KiCad E.D.A. 10.0.5	Rev: 1.03
	Id: 3/3