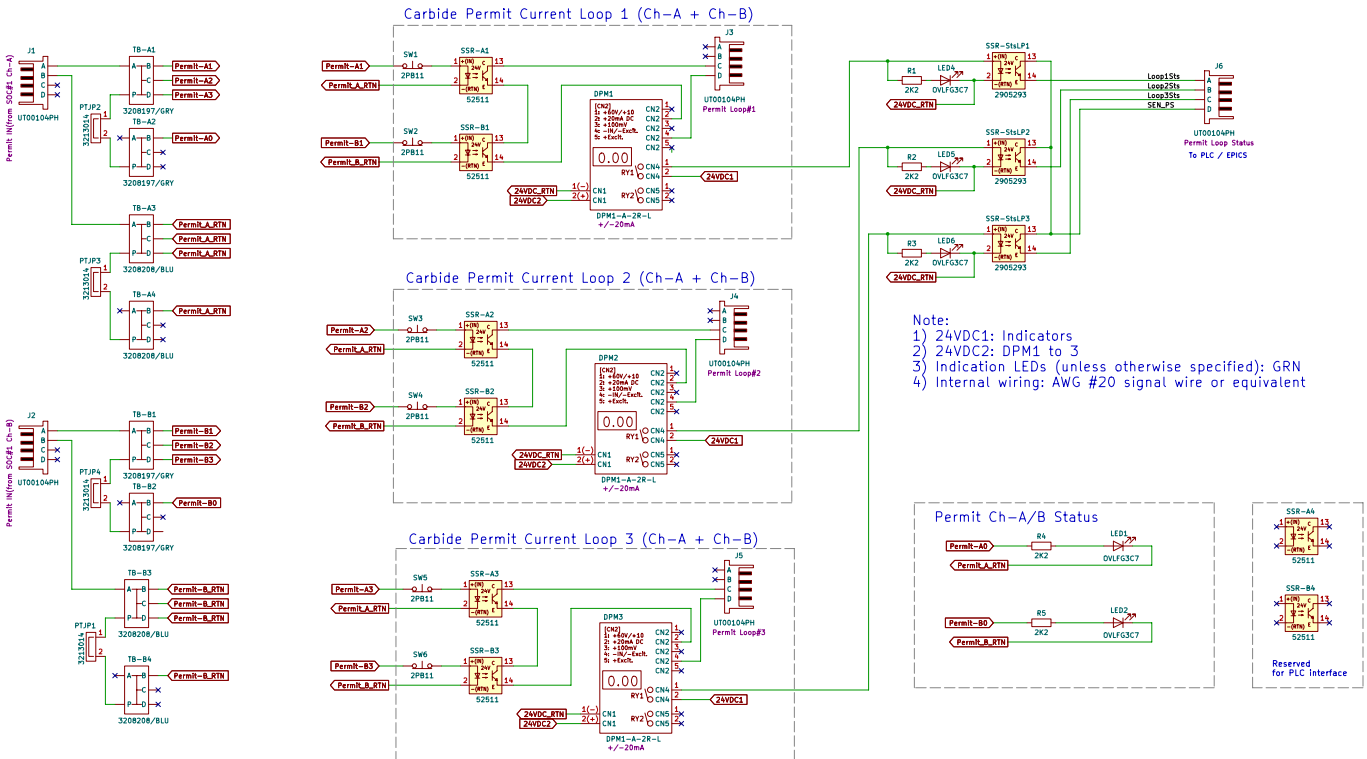


3x CARBIDE PERMIT INTERLOCK



- Note:
- 1) 24VDC1: Indicators
 - 2) 24VDC2: DPM1 to 3
 - 3) Indication LEDs (unless otherwise specified): GRN
 - 4) Internal wiring: AWG #20 signal wire or equivalent

DRAFT: Kicad v10
 CHKR:
 ENGR: J.Park
 SLAC
 Sheet: /3xCarbide Permit ILK/
 File: 3xCarbide Permit ILK.kicad_sch
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK
 Size: B Date: 2026-08-23
 Kicad E.D.A. 10.0.5

Rev 1.01
 Id: 1/3


FRONT

CARBIDE PERMIT INTERFACE CHASSIS



REAR

SD-376-0XX-XX

For reference:
NOT TO SCALE

Carbide Permit Interface Cable Connection Example

(3x)



4Pin/P (UT0610-4SH)

A > #21 (SV OUT)

B > #9 (IN)

C > #19 (FIL OUT)

D > #12 (GND)*

*GND: 1 to 8 & 12

C/D Not use



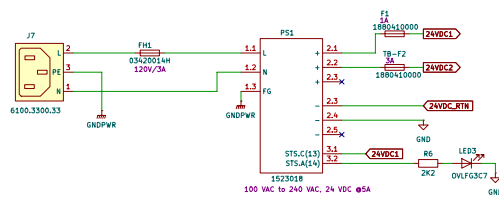
BCS Permit Cable for Carbide X513 Interface

CARBIDE LASER (1-OF-5)



PARTIAL_LASER_STOP(X13.9-21): Current-loop (5V, 40 mA max.)

TOPIL 5VDC 48VDC0.5A // Item No.2773760000
 TERNERLEB3-compact: Solid-state relay.
 Rated control voltage: 5 V DC $\pm 20\%$.
 Rated switching voltage: 5-48 V DC.
 Continuous current: 550 mA. PUSH IN
 Rated control voltage: 5 V DC $\pm 20\%$.
 Nominal control current: 4 mA DC

Ref. CONN of the ADM chassis



Related accessories

Key SSR
-Switch off characteristicsSSR-2900293
Typical turn-off time 300 μ s

SSR(20kV2) 52511

Switch off delay max. 18 μ s

DRFT: Kicad v10

CHKR:

ENGR: J.Park

SLAC

Sheet: //PS_CONN/

File: conn.kicad_sch

Title: LCL5-II BCS CARBIDE PERMIT INTERLOCK

Size: B Date: 2026-08-23

Kicad E.D.A. 10.0.5

Rev: 1.01

Id: 2/3

