



3x CARBIDE PERMIT INTERLOCK

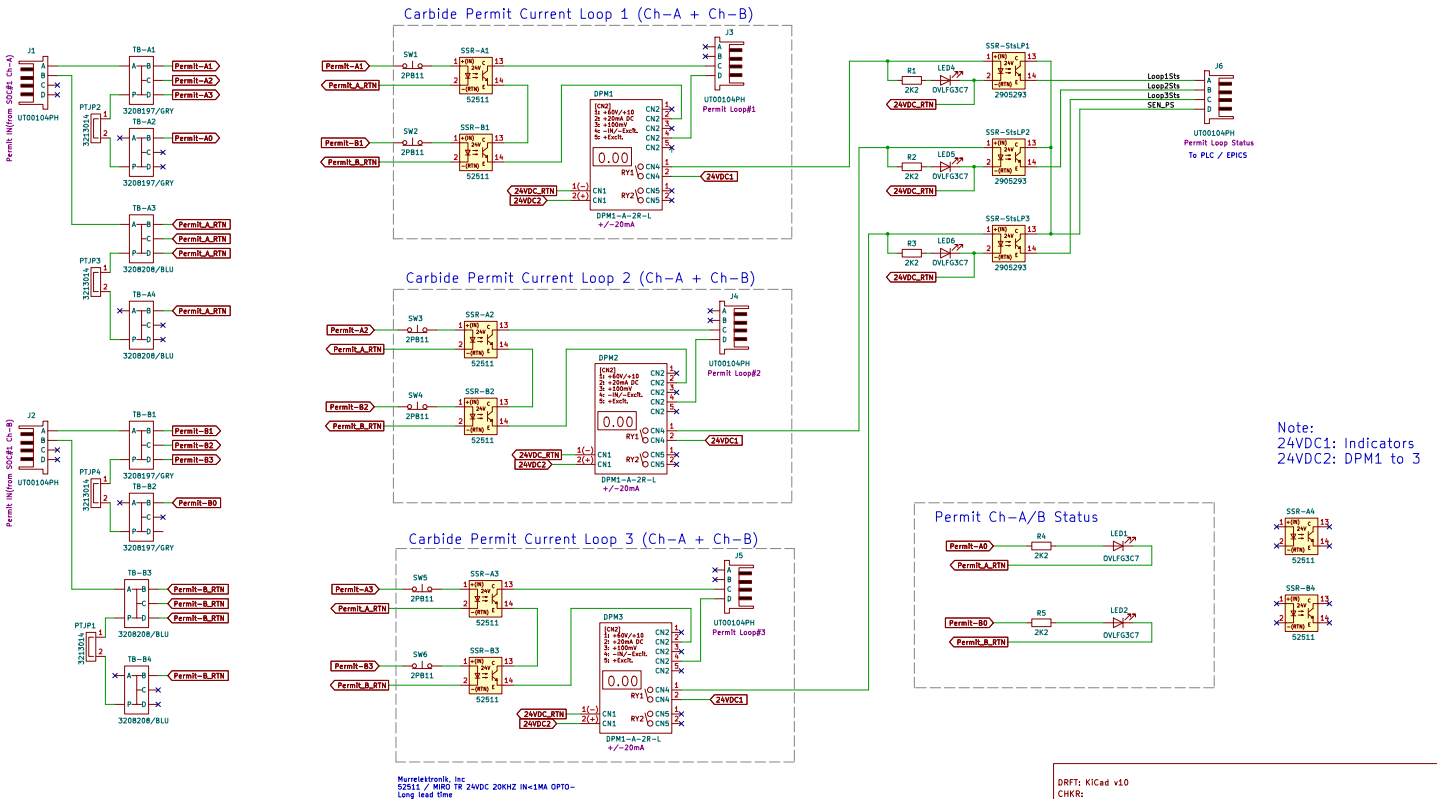

DRAFT: Kicad v10
CHKR:
ENGR: J.Park
SLAC
Sheet: /3xCarbide Permit ILK/
File: 3xCarbide Permit ILK.kicad_sch
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK
Size: B Date: 2026-08-23
Kicad E.D.A. 10.0.5

Rev 1.01
Id: 1/3

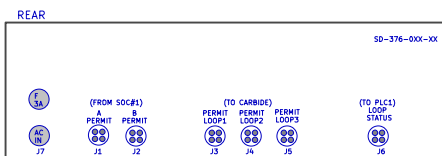

For reference:
NOT TO SCALE

Carbide Permit Interface Cable



AWG20
~ 3 ft*
(* appropriate length)

UT0610-4SH
Souriau


BCS Permit Cable for Carbide XS13 Interface

PARTIAL_LASER_STOP(X13.9-21): Current-loop (5V, 40 mA max.)



TOPL 5VDC 48VDC0.5A // Item No.2773760000
TERMSERIES—compact, Solid-state relay.
Rated control voltage: 5 V DC $\pm 20\%$ X
Rated switching voltage: 5...48 V DC,
Continuous current: 500 mA, PUSH IN
Rated control voltage: 5 V DC $\pm 20\%$ X
Nominal control current: 4.4 mA DC



Ref. CONN of the AOM chassis

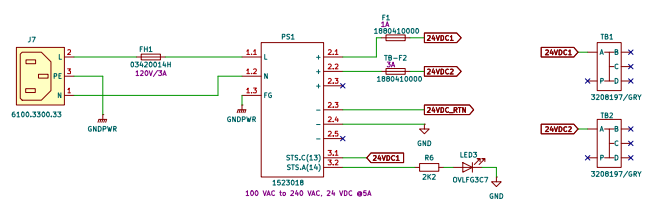

Related accessories



SSR_2905293



SSR.52511

DRFT: KiCad v10

CHKR:

ENGR: J.Park

SLAC

Sheet: /PS_CONN/
File: ps_conn.dwg

File: conn.kicad_sch
TIM: 1.616 11.5

Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK





Size: B	Date: 2026-08-21
---------	------------------

KICad E.D.A. 10.0.5

Rev: 1.01

Id: 2/3

Reference Diagram for Carbide Permit Interface Cable Fabrication

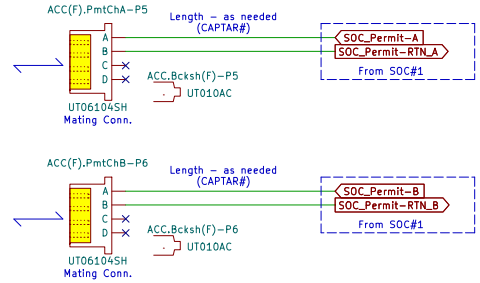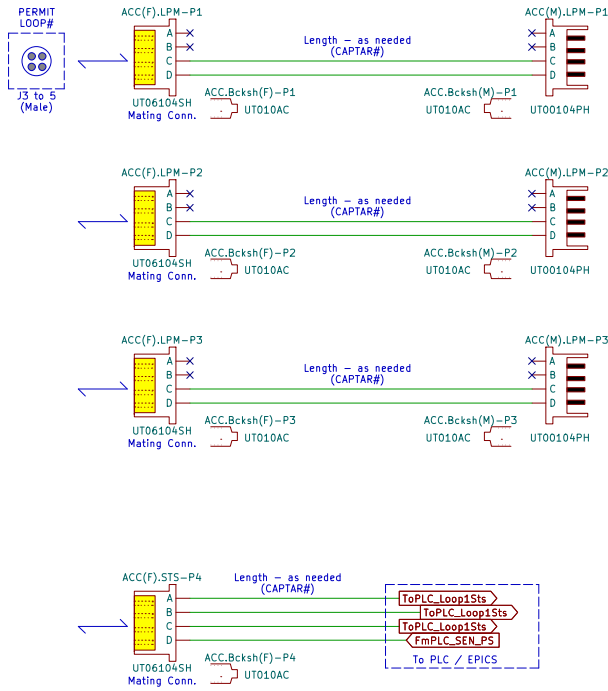

CHKR:		
ENGR: J.Park		
SLAC		
Sheet: /Interface Cable/		
File: interface_cable.kicad_sch		
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK		
Size: A4	Date: 2026-08-21	Rev: 1.01
KiCad E.D.A. 10.0.5		Id: 3/3