


3x CARBIDE PERMIT INTERLOCK

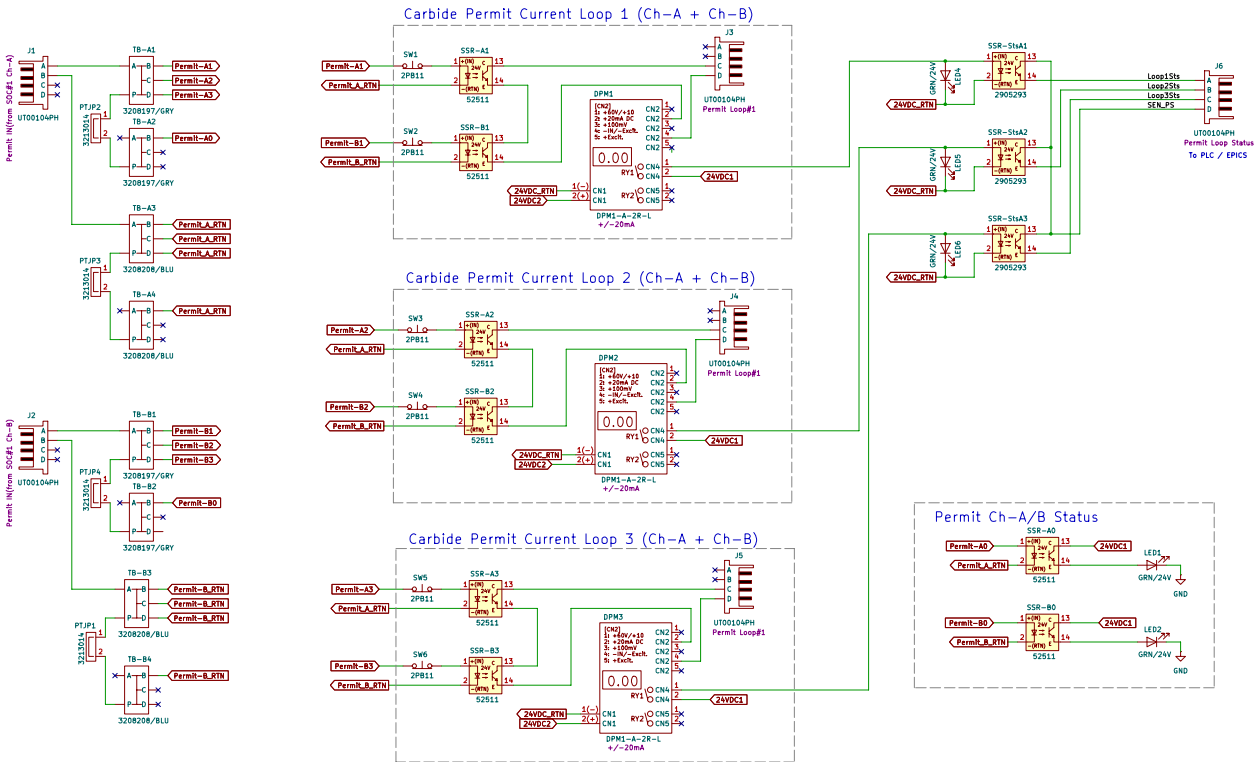

Note:
24VDC1: Indicators
24VDC2: DPM1 to 3

Murrelelektronik, Inc.
52511 / MRO TR 24VDC 20KHZ IN=1MA OPTO-
Long lead time

DRAFT: Kicad v10
CHKR:
ENGR: J.Park
SLAC
Sheet: /3xCarbide Permit ILK/
File: 3xCarbide Permit ILK.kicad_sch
Title: LCLS-II BCS CARBIDE PERMIT INTERLOCK
Size: B Date: 2026-08-14
Kicad E.D.A. 10.0.5

Rev 1
Id: 1/2


FRONT

CARBIDE PERMIT INTERFACE CHASSIS



SD-376-0XX-XX

REAR

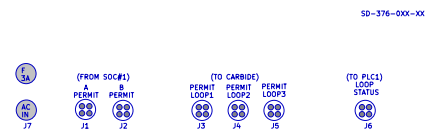

For reference:
NOT TO SCALE


SSR.52511





PARTIAL_LASER_STOP(X13.9-21): Current-loop (5V, 40 mA max.)

TOPPL 5VDC 48VDC0.5A // Item No.2773760000
TERMSERIES-compact, Solid-state relay.
Rated control voltage: 5 V DC $\pm 20\%$
Rated switching voltage: 5-48 V DC
Continuous current: 500 mA, PUSH IN
Rated control voltage: 5 V DC $\pm 20\%$
Nominal control current: 4.4 mA DC

Ref. CONN of the ADM chassis

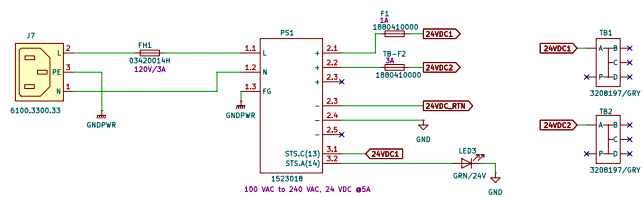

Related accessories



40m (UT0010-40H)
A > #12 (DN-OUT)
B > #9 (IN)
C > #18 (TL-OUT)
D > #12 (GND)
*GND: 1-5 & 12

UT0010-40H
Souriau

AWG20
~38"
(*appropriate length)

BCS Permit Cable for Carbide XS13 Interface

DRAFT: KiCad v10
CHKR:
ENGR: J.Park
SLAC
Sheet: //PS_CONN/
File: conn.kicad_sch
Title: LCL5-II BCS CARBIDE PERMIT INTERLOCK
Size: B | Date: 2026-08-14 | Rev 1
KiCad E.D.A. 10.0.5 | Id: 2/2