
Frequency Sweep



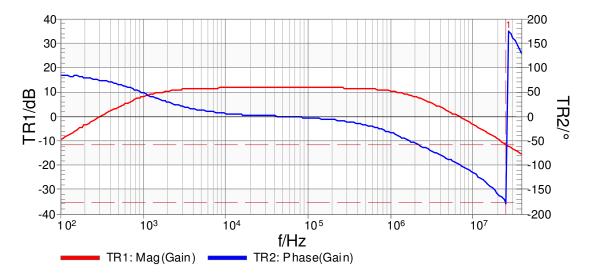

 Cursor
 Frequency
 Trace 1
 Trace 2

 Cursor 1 :
 25.031114 MHz
 -11.402 dB
 -176.000 °

Cursor 2 : Delta :

Sweep	
Start Frequency:	100.000 Hz
Stop Frequency:	40.000 MHz
Center Frequency:	20.000050 MH
Span:	39.999900 MH
Sweep Mode:	Logarithmic
Number of Points :	201

ConfigurationLevel:-10.00 dBmAttenuator CH1:20 dBAttenuator CH2:20 dBReceiver Bandwidth:300 Hz

Measurement

Reference Resistance: 50.00 Ohm

Trace	Measurement	Format	Comment
TR1:	Gain	Mag(dB)	IGAIN=-60dB

Calibration	Gain	lmp.
Probe :	On	_
User:	-	-
Device Setting	ıs	

Device Settings	
DUT delay :	0.00 s
Impedance CH1:	1 MOhm
Impedance CH2:	1 MOhm
Switch CH1:	Internal
Switch CH2 ·	CH2

GAIN=-60dB, PGAIN=12dB

TR2:

Gain

Phase(°)