Three distance sensors - one Arduino Mega 2560

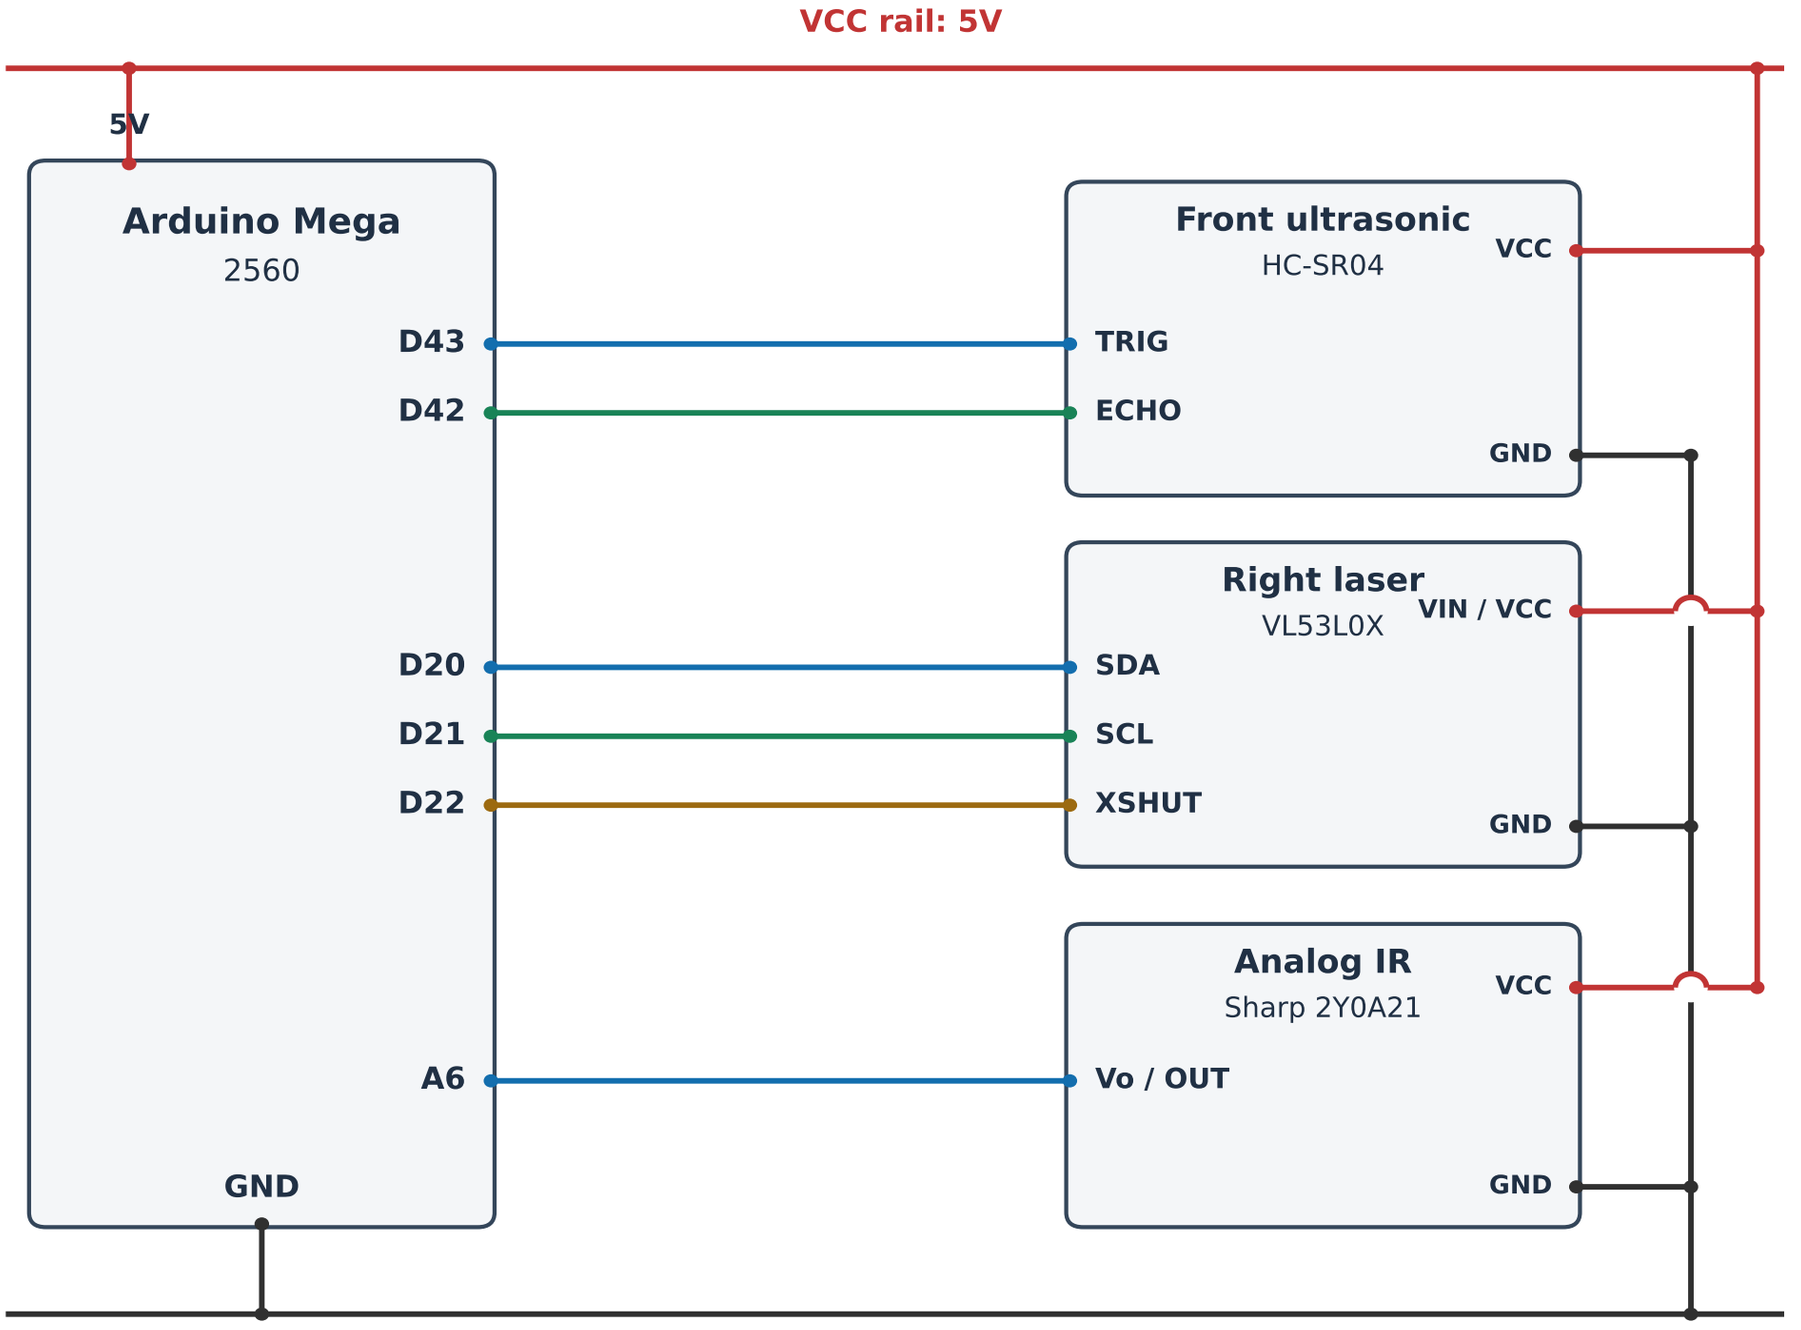

Dots mark electrical junctions; wire bridges are crossings without a connection.
Connections show pin labels, not physical connector order. Laser module supply: user-confirmed 5V.
Right laser address: 0x30. XSHUT is pulled LOW or released, not driven HIGH to 5V.
IR: recommended bypass capacitor >=10 µF across VCC-GND near the sensor (not drawn).