

HOODIE

size 140

wide fit, Sweat / French Terry (25 % stretch)

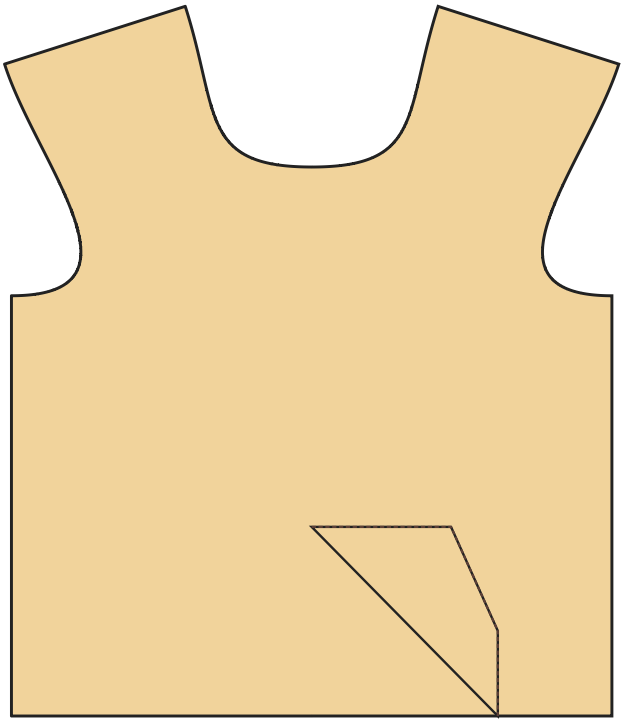

Front view

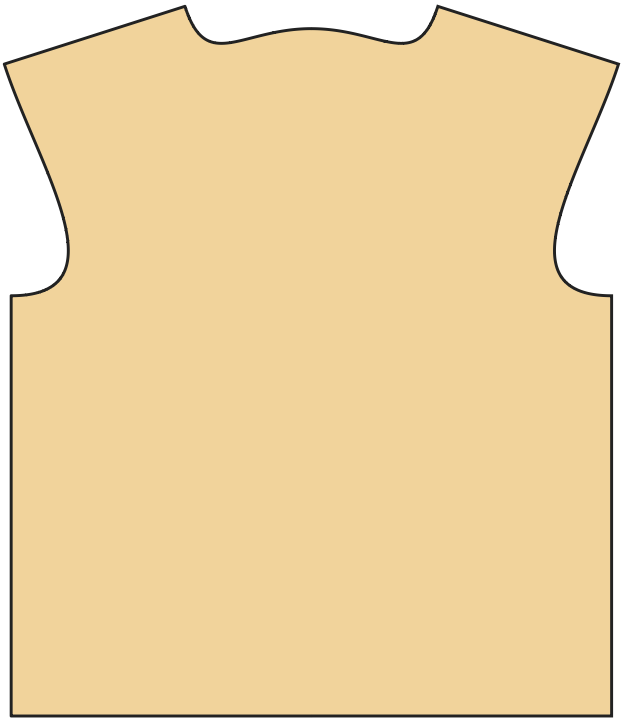

Back view

Size	**size 140**
Main fabric	**1.15 m at 150 cm width**
Rib knit	**0.30 m at 70 cm width**
Sewn with	**Sewing machine**
Seam allowance	**included: 1.0 cm · hem 1.0 cm**
Parts and steps	**7 parts · 22 steps**
Difficulty	**medium · about 3 h**

Read the steps once before you start. Every picture is drawn from your pattern pieces. Sew a test garment from cheap fabric first and adjust before you cut the good fabric.

Parts



A 1×
Front · cut on fold



B 1×
Back · cut on fold



C 2×
Sleeve



D 2×
Sleeve cuff



E 1×
Hem band · cut on fold



F 2×
Hood



G 1×
Kangaroo pocket · cut on fold

Fabric and notions

Main fabric
1.15 m at 150 cm width

Rib knit
0.30 m at 70 cm width

Pins or clips
Pin across the seam line.

Polyester sewing thread
In the colour of the fabric.

Colours and lines

Main fabric
right side · wrong side

Rib knit
right side · wrong side

Sew now (machine)

Sew by hand

Fold / press line

Marking (chalk)

Pin

Notch: match them

Right/wrong side of the fabric = the side of the fabric. Left/right (as worn) = seen from the child wearing it: the left front leg is on the right when you look at the child.

Machines and tools

Sewing machine
twin needle 4 mm, stitch 3 mm; narrow zigzag 1 × 2.5 mm (or overlocker); wide zigzag 4 × 1.5 mm over the edge

Iron
steam

Pins or clips

Fabric scissors

Tape measure


Chalk or a fabric pen

Steps are written for a sewing machine with zigzag. Have an overlocker or a coverstitch machine? Tell the generator which machines you own and the steps use them.

Basics: the sewing machine



Straight stitch
Seams in woven fabric, 2.5 mm; backstitch at the start and the end.



Zigzag
Knit seams (narrow) and finishing the edges (wide).




Topstitching
Right side up, with the same distance to the edge all the way; use the edge of the presser foot as a guide.

PREPARE

1 Pre-wash the fabric

1. Wash and dry it the way you will wash the garment later, so it shrinks now, not after sewing.

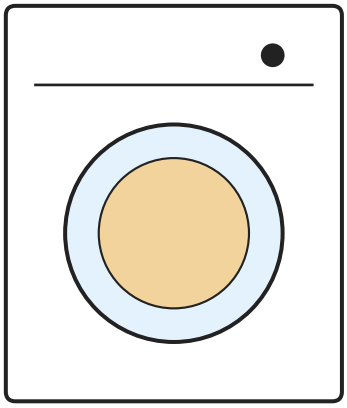

30–40°


2 Cut out all pieces



Scissors

1. Follow the cutting layout
2. Grainline arrows parallel to the selvage.

> ✓ **Tip**
> Cut both layers at once with long strokes; keep the fabric flat on the table.

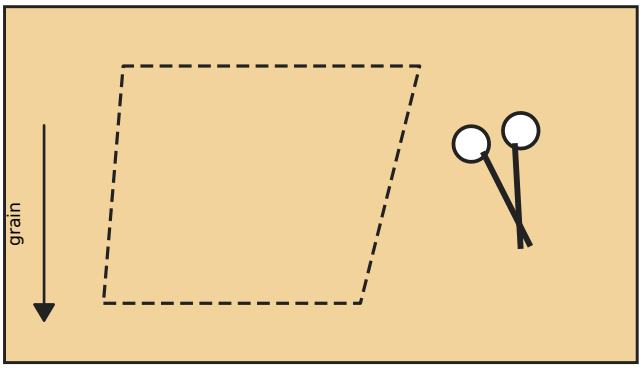


3 Snip the notches

Chalk

1. Cut 3–4 mm into the seam allowance at every notch.


⚠ **Important**
Never deeper than half the seam allowance.

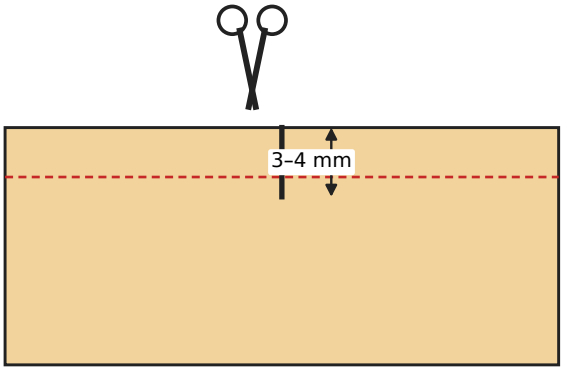

4 Set up the machine

1. Jersey/stretch needle 75–80, polyester thread.
2. Sew a test seam on a scrap first.

✓ **Tip**
See the basics page at the front of the booklet.

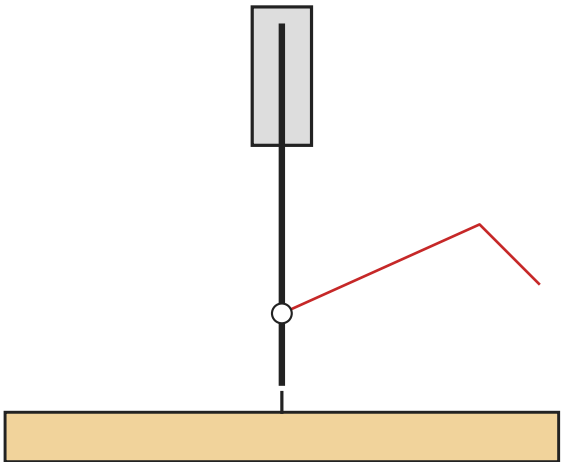


POCKET


5 Hem the pocket openings

Sewing machine

1. Press 1.5 cm under and topstitch.

Sewing machine: twin needle 4 mm, stitch 3 mm

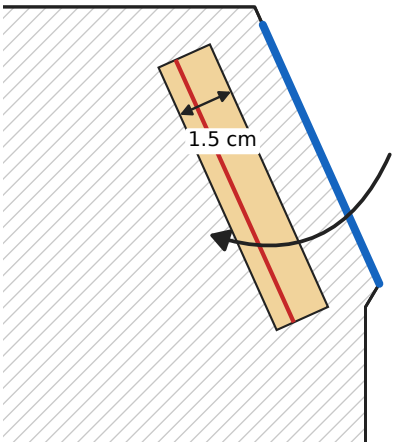





6 Press the top edge under

Iron

1. 1 cm to the wrong side.


Iron: steam

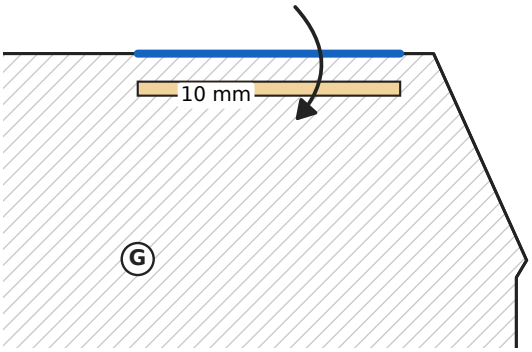



7 Stitch the pocket on

Sewing machine

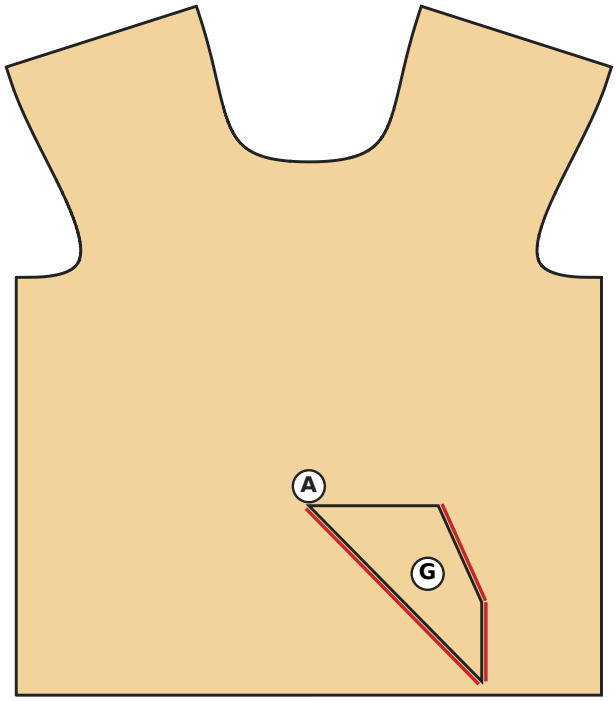

1. On the marking
2. Stitch top edge and sides.
3. The bottom edge is caught by the hem band.

Sewing machine: twin needle 4 mm, stitch 3 mm

SHOULDERS

8 Sew the shoulder seams


×2 both sides

Sewing machine

Pins

1. Front and back right sides together.


Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

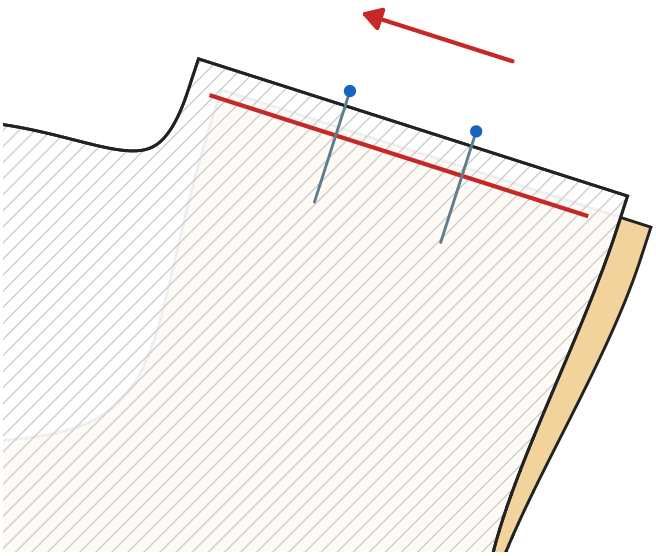

HOOD

9 Sew the hood centre seam

Sewing machine · Pins

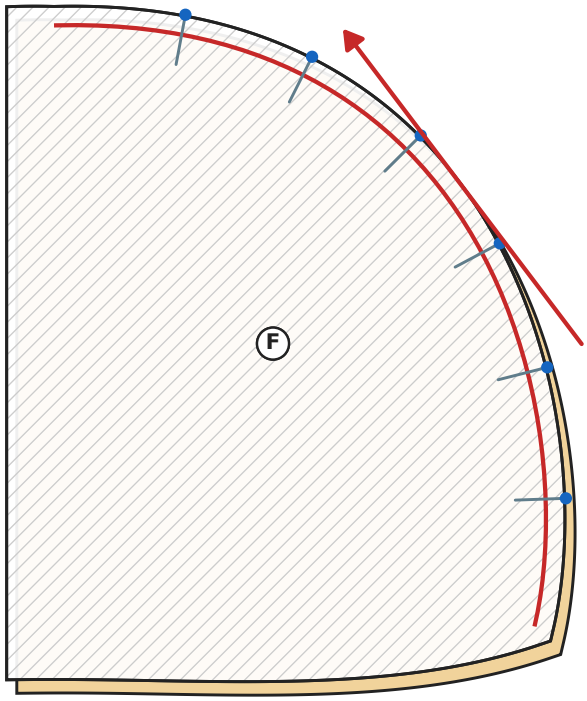

1. Hood pieces right sides together.


Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

10 Hem the hood front edge

Sewing machine


1. Press to the inside along the fold line and topstitch (room for a drawstring).

Sewing machine: twin needle 4 mm, stitch 3 mm

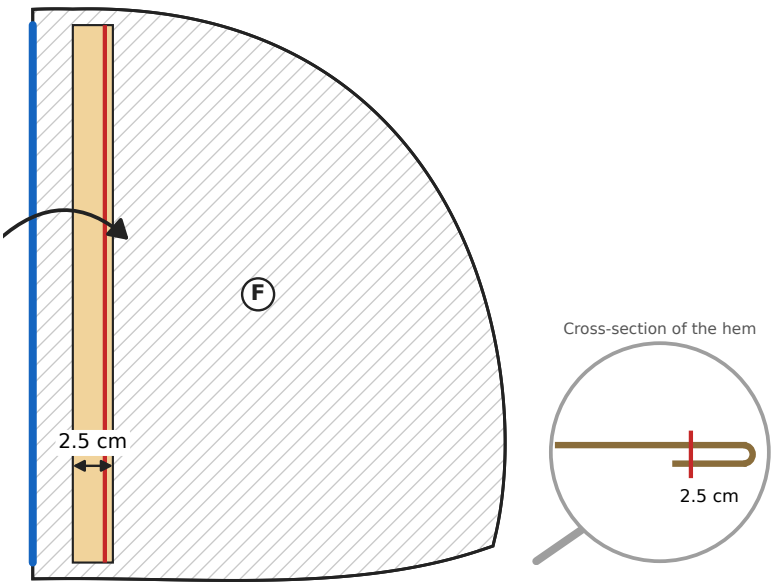

11 Sew the hood on

Sewing machine · Pins

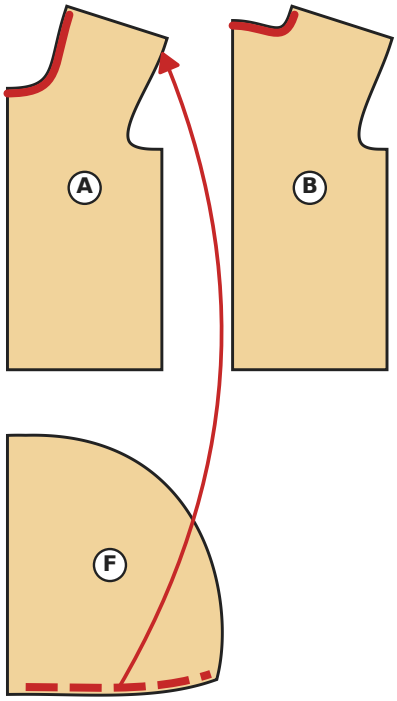

1. Hood right sides together to the neckline: centre seam at centre back, front edges meet at centre front (overlap 1 cm if needed).


Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

12 Finish the neck seam

Sewing machine

1. Cover the seam allowance with jersey binding or finish it.

Sewing machine: wide zigzag 4 × 1.5 mm over the edge

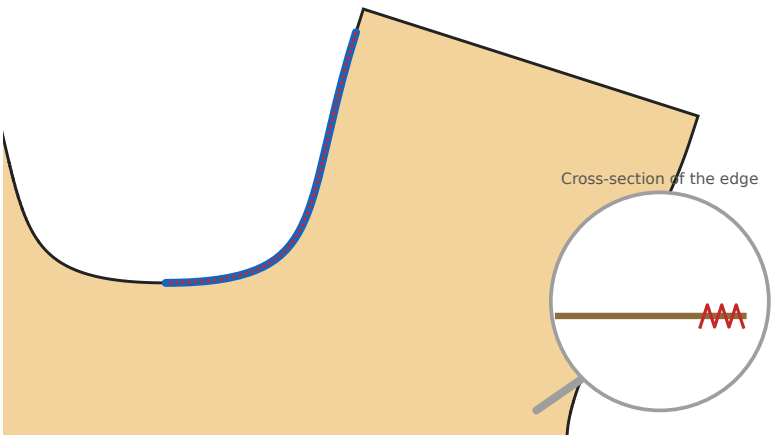


SLEEVES

13 Set in the sleeves

×2
both sleeves

Sewing machine

Pins

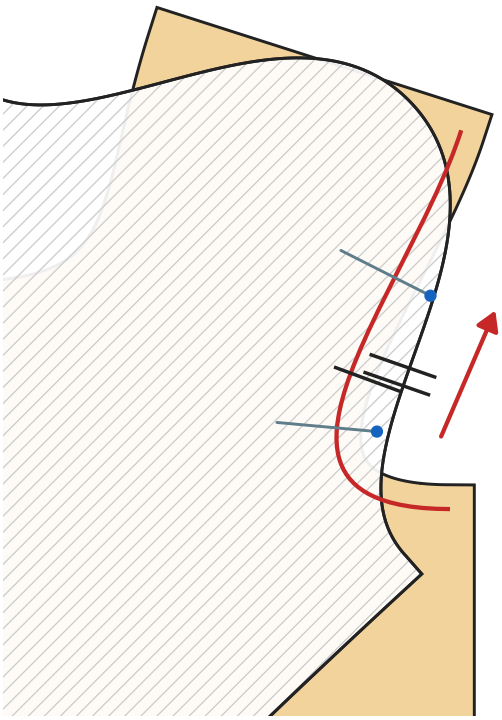

1. Top notch of the sleeve cap on the shoulder seam, front/back notches meet
2. Sew the sleeve in flat.

Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

> ⚠ **Important**
> Sleeve on the bottom: the machine eases the cap in.


SIDES

14 Sew side and sleeve seams

×2
both sleeves

Sewing machine

Pins

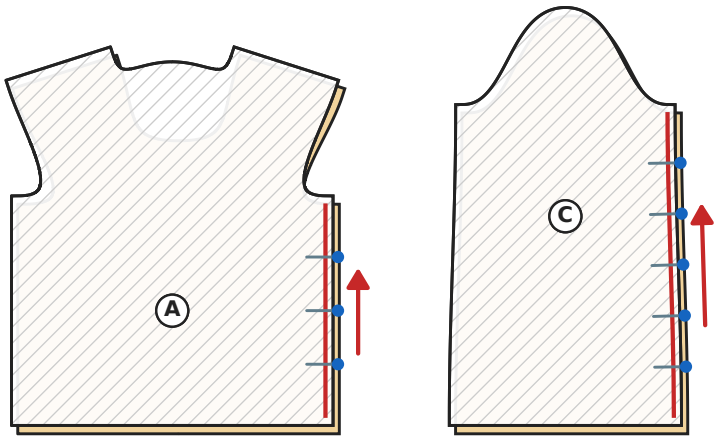

1. In one go from the hem over the underarm to the sleeve hem
2. The underarm seams meet exactly.

Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

CUFFS

15 Close the cuffs into rings


×2
both sides

Sewing machine

Pins

1. Right sides together across the short ends.

Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

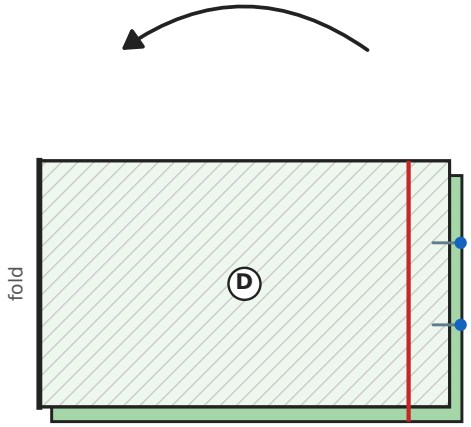


16 Fold the cuffs in half

×2
both sides

Iron

1. Lengthwise, wrong sides together.

Iron: steam

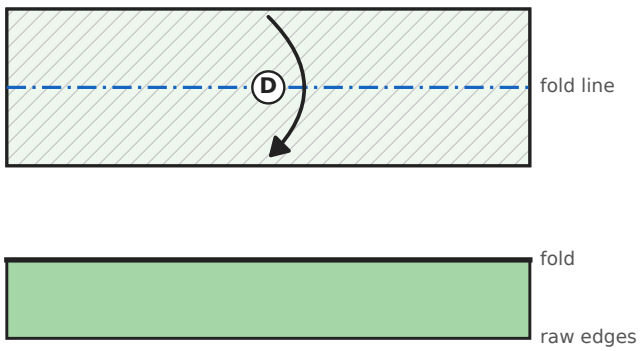

17 Sew the cuffs on


×2
both sleeves

Sewing machine

Pins

1. Cuff seam at the sleeve seam
2. Quarter cuff and sleeve hem with pins.

Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

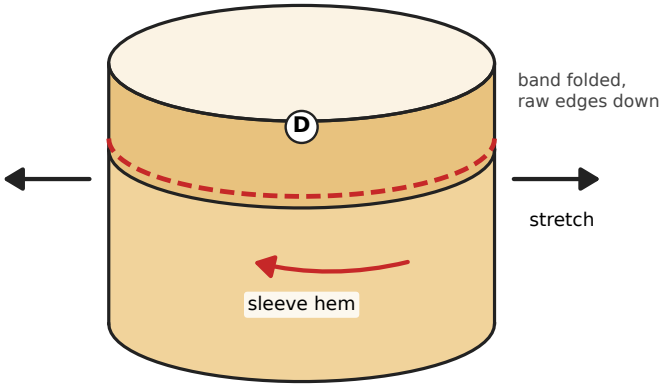

HEM


18 Close the hem band into a ring

Sewing machine

Pins

1. Right sides together across the short ends.

Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

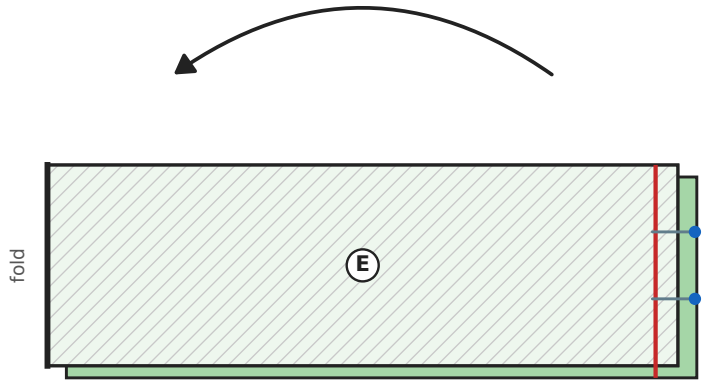


19 Fold the hem band in half

Iron


1. Lengthwise, wrong sides together.


Iron: steam

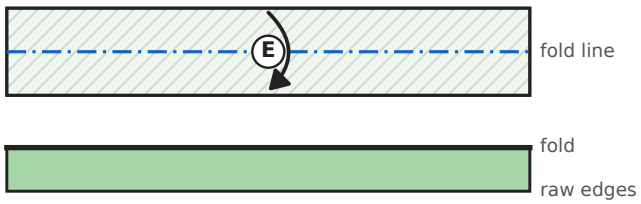

20 Mark quarters

1. Band: cross seam at a side seam.

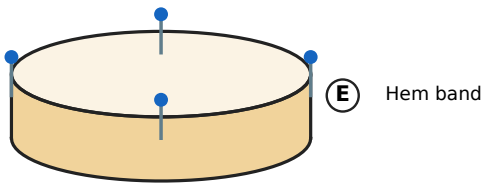

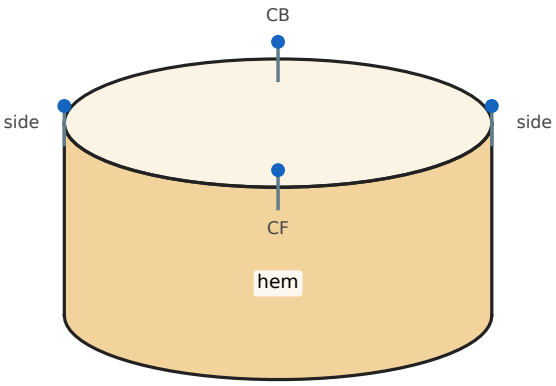


21 Sew the hem band on

Sewing machine

Pins

1. Right sides together, raw edges meet.

Sewing machine: narrow zigzag 1 × 2.5 mm (or overlocker)

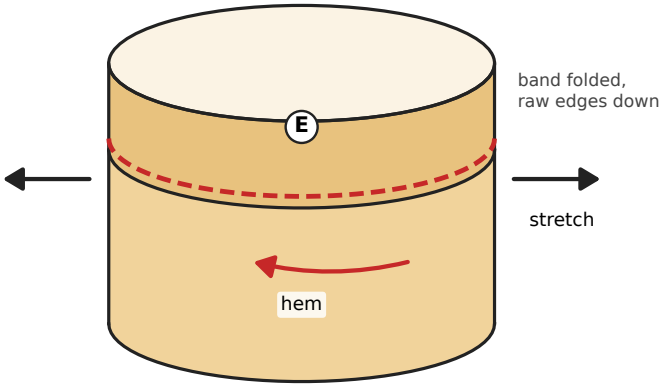


FINISH

22 Done!

1. Press all seams with steam
2. Do not press down hard on sweat.



Done!

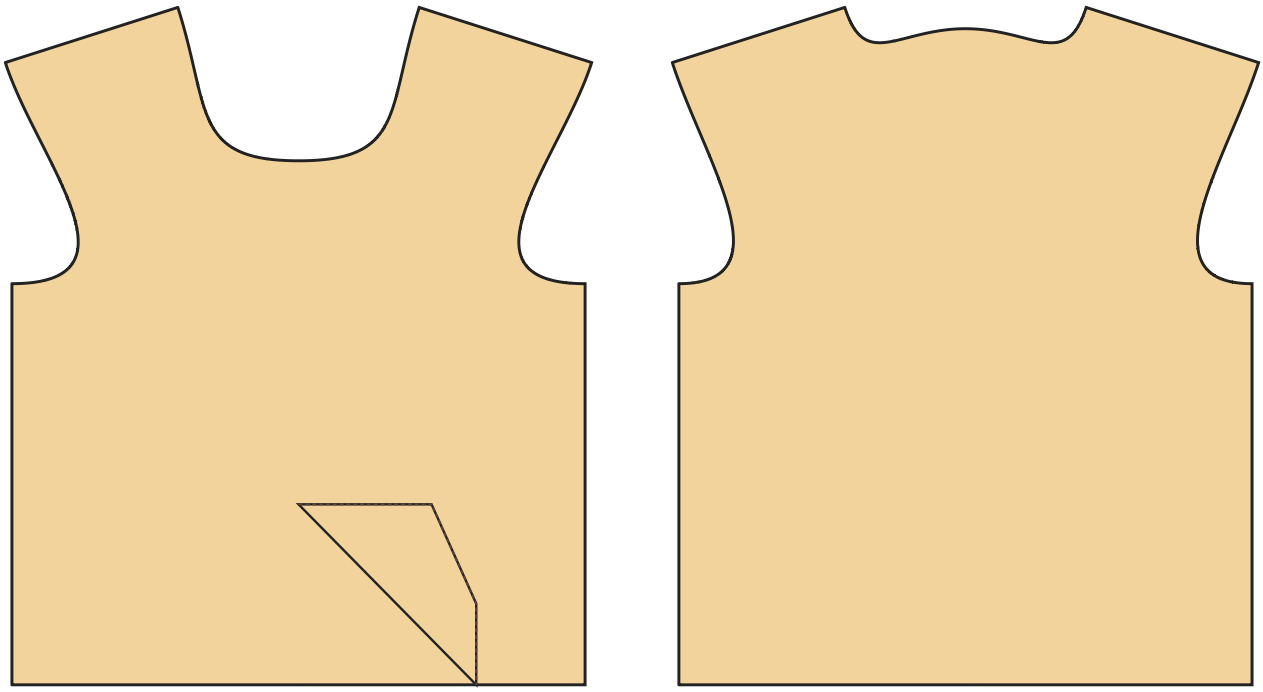

Front view

Back view

Press all seams with steam; do not press down hard on sweat.

✓ After the test garment
Try the test garment on the child: length, width at the hip and the waistband. Adjust the measurements or options and print the pattern again before you cut the good fabric.

Hoodie · size 140

wide fit, Sweat / French Terry (25 % stretch) · original parametric draft. The pattern is yours to use.

> **Important:** With a new pattern, first sew a **test garment** from inexpensive fabric with similar stretch and check the fit.

Files

- PDF A4 tiles to glue (15 pages + overview): `hoodie_size140_a4_tiled.pdf`
- Preview A4 tiles: `hoodie_size140_a4_preview.png`
- SVG master 1:1: `hoodie_size140_master_1to1.svg`
- Cutting layout: `cutting_layout.png`
- Sewing instructions (PDF): `sewing_instructions.pdf`
- Sewing instructions (Markdown): `sewing_instructions.md`

Printing

- Always print at **100 % / "Actual size"** (not "Fit to page").
- Measure the **5 × 5 cm** control square before you cut.
- Plotter (610 mm roll): the page is 600 mm wide in portrait. In the print dialog choose a custom paper size with exactly this width and length, and turn rotation/scaling off.

Body measurements

Body measurement	Value	Source
Body height	140.0 cm	table
Chest	69.0 cm	table
Waist	60.0 cm	table
Hip	75.0 cm	table
Head	53.5 cm	table
Neck	31.0 cm	table
Inseam	64.5 cm	table
Side length	84.0 cm	table
Arm length	56.0 cm	table
Back length	34.0 cm	table
Shoulder width	11.2 cm	table
Thigh	42.0 cm	table
Ankle	20.2 cm	table

Finished measurements (virtually sewn)

Finished measurement	Value
Chest width	80.7 cm
Hem width	56.5 cm
Length from neck point	52.2 cm
Sleeve length	56.1 cm
Sleeve opening	20.0 cm
Upper-arm width	26.9 cm
Neckline circumference	51.1 cm
Hood height	33.5 cm

Pattern pieces

Piece	Cutting	Fabric	Seam allowance
Front	cut 1 on fold	Main fabric	seam allowance 1.0 cm included; Neckline: 0.7 cm

Piece	Cutting	Fabric	Seam allowance
Back	cut 1 on fold	Main fabric	seam allowance 1.0 cm included; Neckline: 0.7 cm
Sleeve	cut 2 (mirrored pair)	Main fabric	seam allowance 1.0 cm included
Sleeve cuff	cut 2	Rib knit	seam allowance 1.0 cm included
Hem band	cut 1 on fold	Rib knit	seam allowance 1.0 cm included
Hood	cut 2 (mirrored pair)	Main fabric	seam allowance 1.0 cm included; Front edge (casing/facing): 2.5 cm
Kangaroo pocket	cut 1 on fold	Main fabric	seam allowance 1.0 cm included; Opening (hem it): 1.5 cm

Fabric needed

- **Main fabric:** about 1.15 m at 150 cm width (single layer, incl. 10 % for shrinkage; folded would need 1.35 m)
- **Rib knit:** about 0.30 m at 70 cm width (single layer, incl. 10 % for shrinkage)

Cutting layout: see `cutting_layout.png` (grainline arrow parallel to the selvage, "flipped" = place the piece face down, "×2" = cut through both layers of the folded fabric, which gives a mirrored pair, "(unfolded)" = cut-on-fold piece shown opened out).

Cut on fold (Front, Back, Hem band, Kangaroo pocket): the paper piece is only one half. Its fold edge (dash-dot line, bracket arrows "PLACE ON FOLD") is the centre of the piece: it gets no seam allowance and is never cut. Where the cutting layout shows a piece "(unfolded)" on a single layer, fold the fabric along the grain just wide enough for the piece and place the fold edge on that fold, or trace the paper piece, flip it over along the fold edge and trace the second half.

Validation report

Sewability check

Area	Check	Target	Actual	Δ	Result	Note
Seam pairs	Side seam front ↔ back	28.2 cm	28.2 cm	+0.0 mm	✓ OK	
Seam pairs	Armhole ↔ sleeve cap (ease)	ease 0–8 mm	38.9 cm ↔ 39.2 cm	+3.2 mm	✓ OK	Sweat / French Terry: 0–8 mm
Seam pairs	Shoulder seam front ↔ back	12.8 cm	12.8 cm	+0.0 mm	✓ OK	
Seam pairs	Sleeve seam (front ↔ back)	40.3 cm	40.3 cm	-0.0 mm	✓ OK	
Seam pairs	Sleeve cuff ↔ sleeve hem (stretched)	70–85 % of 28.6 cm	20.0 cm = 70 %	-85.8 mm	✓ OK	rib band is stretched while sewing
Seam pairs	Hem band ↔ hem (stretched)	70–92 % of 80.7 cm	56.5 cm = 70 %	-242.2 mm	✓ OK	rib band is stretched while sewing
Seam pairs	Hood ↔ neckline (each side)	25.6 cm	25.6 cm	+0.0 mm	✓ OK	
Seam pairs	Hood centre seam (left ↔ right)	47.4 cm	47.4 cm	+0.0 mm	✓ OK	
Angles/transitions	Underarm: side seam ↔ armhole front	90°	90.3°	+0.3°	✓ OK	
Angles/transitions	Underarm: side seam ↔ armhole back	90°	90.5°	+0.5°	✓ OK	
Angles/transitions	Shoulder ↔ armhole (front + back)	180°	179.5°	-0.5°	✓ OK	
Angles/transitions	Sleeve cap top (smooth)	180°	178.4°	-1.6°	✓ OK	

Area	Check	Target	Actual	Δ	Result	Note
Angles/transitions	Sleeve underarm ↔ cap front	90°	90.8°	+0.8°	✓ OK	
Angles/transitions	Shoulder ↔ neckline (front + back)	180°	180.3°	+0.3°	✓ OK	
Angles/transitions	Neckline at centre front	90°	90.2°	+0.2°	✓ OK	
Angles/transitions	Neckline at centre back	90°	89.6°	-0.4°	✓ OK	
Angles/transitions	Hem at centre front	90°	90.0°	+0.0°	✓ OK	
Angles/transitions	Hem ↔ side seam front	90°	90.0°	+0.0°	✓ OK	
Angles/transitions	Hood: front edge ↔ neck seam	90°	90.0°	+0.0°	✓ OK	
Measurements	Chest circumference pattern = body + ease	80.7 cm	80.7 cm	+0.0 %	✓ OK	body 69.0 cm + +17 % ease
Measurements	Neckline (fabric edge) fits over the head	≥ 53.5 cm	63.9 cm	+104.0 mm	✓ OK	neckline incl. stretch ≥ head circumference
Measurements	Hand fits through the sleeve cuff	≥ 21.4 cm	36.0 cm	+146.3 mm	✓ OK	hand circumference ≈ 1.55 × wrist
Measurements	Sleeve length plausible	50.4 cm – 70.0 cm	56.1 cm	+0.0 mm	✓ OK	arm length 56.0 cm
Measurements	Body length plausible	42.0 cm – 86.8 cm	52.2 cm	+0.0 mm	✓ OK	from the neck point
Measurements	Hood tall enough	≥ 29.4 cm	33.5 cm	+41.0 mm	✓ OK	hood height ≥ 0.55 × head circumference
Geometry	Front: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included; Neckline: 0.7 cm
Labels	Front: grainline & cutting	present	cut 1 on fold		✓ OK	Main fabric
Geometry	Back: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included; Neckline: 0.7 cm
Labels	Back: grainline & cutting	present	cut 1 on fold		✓ OK	Main fabric
Geometry	Sleeve: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included
Labels	Sleeve: grainline & cutting	present	cut 2 (mirrored pair)		✓ OK	Main fabric
Geometry	Sleeve cuff: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included
Labels	Sleeve cuff: grainline & cutting	present	cut 2		✓ OK	Rib knit
Geometry	Hem band: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included
Labels	Hem band: grainline & cutting	present	cut 1 on fold		✓ OK	Rib knit
Geometry	Hood: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included; Front edge (casing/facing): 2.5 cm
Labels	Hood: grainline & cutting	present	cut 2 (mirrored pair)		✓ OK	Main fabric

Area	Check	Target	Actual	Δ	Result	Note
Geometry	Kangaroo pocket: outline & seam allowance	closed, SA present	ok		✓ OK	seam allowance 1.0 cm included; Opening (hem it): 1.5 cm
Labels	Kangaroo pocket: grainline & cutting	present	cut 1 on fold		✓ OK	Main fabric
Geometry	Hood: turned allowance lies flat	≤ 0.5 mm	0.0 mm		✓ OK	Front edge (casing/facing): corners mirrored at the fold line
Geometry	Front: cut-on-fold edge	straight, no SA, 90° corners, on grain	ok, corners ≤ 0.2° off 90°		✓ OK	Centre (fold)
Geometry	Back: cut-on-fold edge	straight, no SA, 90° corners, on grain	ok, corners ≤ 0.4° off 90°		✓ OK	Centre (fold)
Geometry	Hem band: cut-on-fold edge	straight, no SA, 90° corners, on grain	ok, corners ≤ 0.0° off 90°		✓ OK	Centre
Geometry	Kangaroo pocket: cut-on-fold edge	straight, no SA, 90° corners, on grain	ok, corners ≤ 0.0° off 90°		✓ OK	Centre (fold)
Labels	Front: notches	on the cutting line	1 notch mark(s)		✓ OK	
Labels	Back: notches	on the cutting line	2 notch mark(s)		✓ OK	
Labels	Sleeve: notches	on the cutting line	4 notch mark(s)		✓ OK	1 at corners

Result: 47 OK, 0 warning(s), 0 error(s): the pattern is sewable.


Construction values

Override any of these with the option `construction`, values in mm (e.g. `{"construction": {"chest_width": 807}}`).

Name	Value	Derived from	Note
`chest_width`	80.7 cm	chest × (1 + 17 % ease)	
`neck_width_half`	8.5 cm	neck / 5 + 1.5 cm	
`front_neck_depth`	10.8 cm	neck_width_half + 1.5 cm	
`back_neck_depth`	1.5 cm	fixed	
`shoulder_length`	12.7 cm	shoulder + allowance for fit 'wide'	
`shoulder_slope`	17	fixed	
`armhole_depth`	19.5 cm	18 % of chest_width + 2.5 cm + 3 %	
`body_length`	52.2 cm	back length + 13 % of height	

Cutting layout · Hoodie size 140

Main fabric: 150 cm wide, single layer
needed ≈ 1.15 m

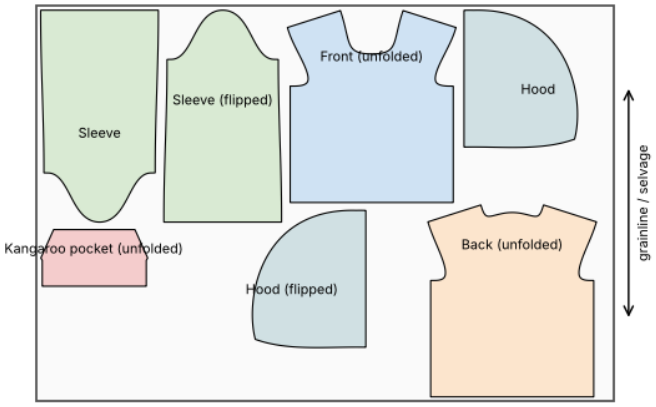

Rib knit: 70 cm wide, single layer
needed ≈ 0.30 m

