

Metadata:

Físico: Físico

Unidade: Versa

Data: 12-01-2025

- CBCT/CT 503 QA Test -

- CTP 404 Results -

HU Linearity tolerance: 40

HU Linearity ROIs:

Air: -943.0, PMP: -385.0, LDPE: -328.5, Poly:

-294.0, Acrylic: -192.0, Delrin: -22.0, Teflon:

384.0

HU Passed?: False

Low contrast visibility: 2.72



Geometric Line Average (mm): 49.53

Geometry Passed?: True

Measured Slice Thickness (mm): 2.390

Slice Thickness Passed? False

HU Linearity (62)

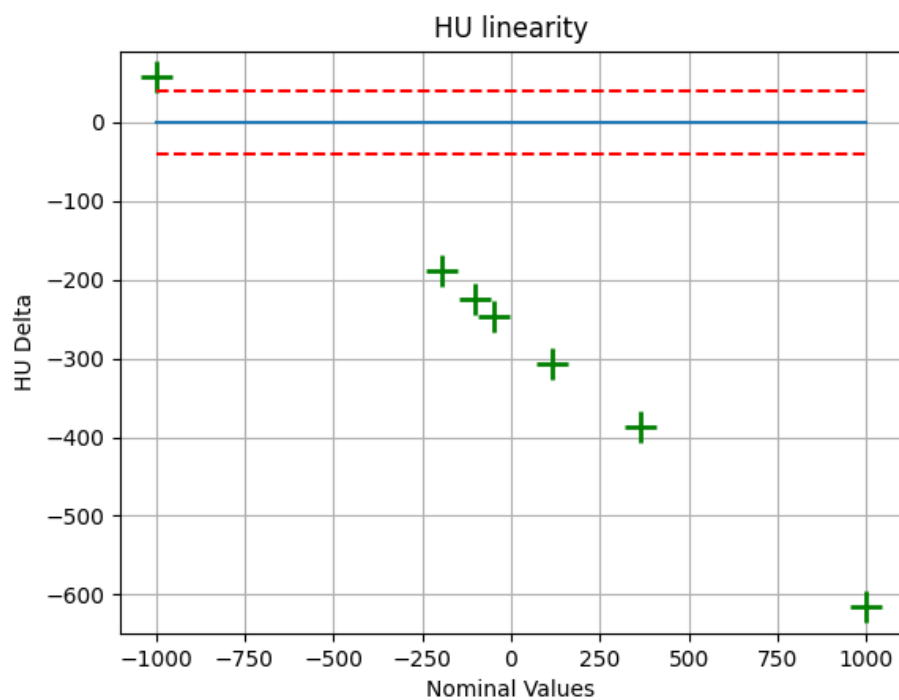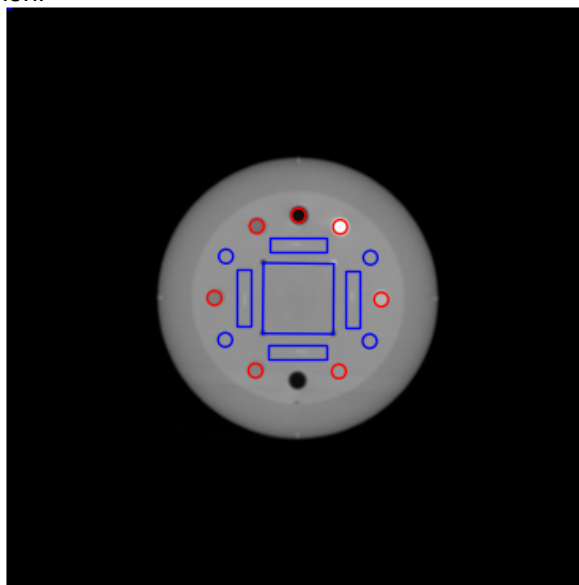

Metadata:

Físico: Físico

Unidade: Versa

Data: 12-01-2025



- CTP528 Results -

MTF 80% (lp/mm): 0.15

MTF 50% (lp/mm): 0.22

MTF 30% (lp/mm): 0.27

Spatial Resolution (52)

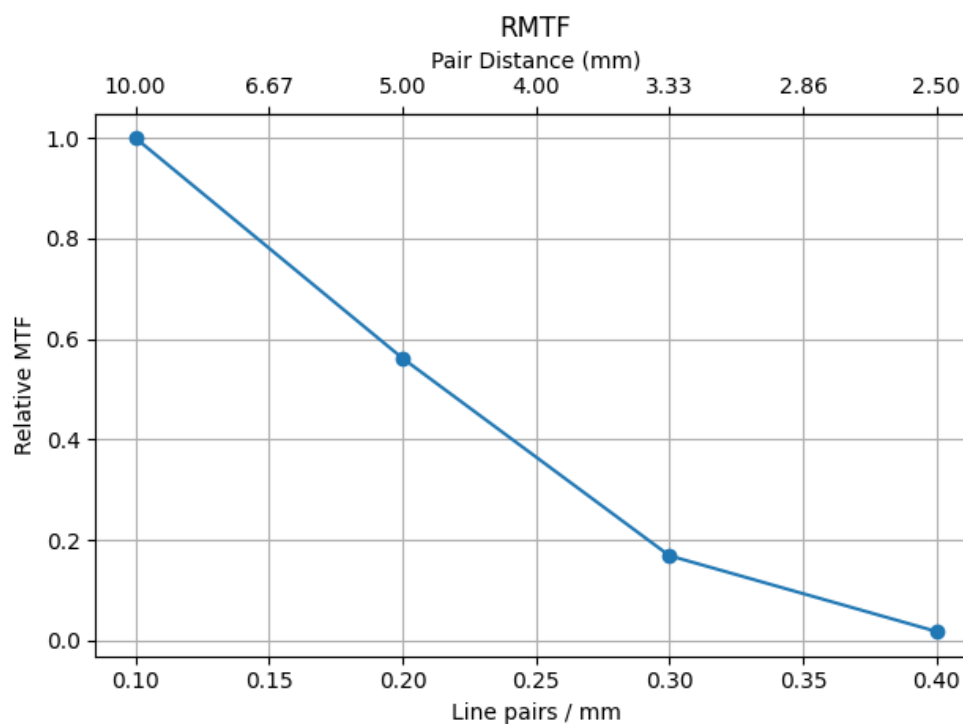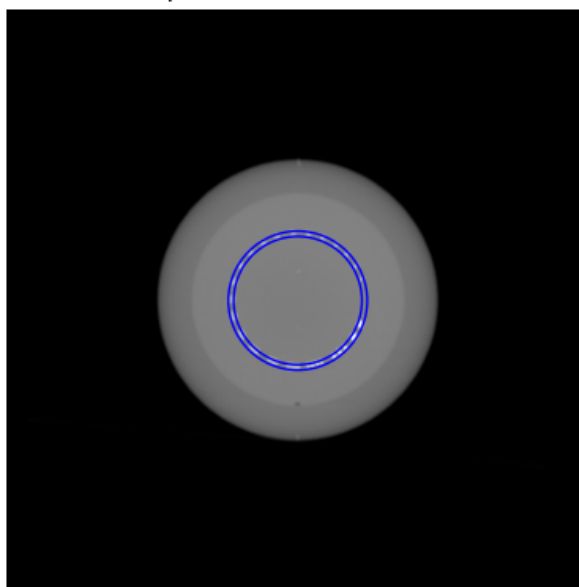

Metadata:

Físico: Físico

Unidade: Versa

Data: 12-01-2025

- CTP486 Results -

Uniformity tolerance: 40

Uniformity ROIs: Top: -247.0, Right: -250.0, Bottom: -259.0, Left: -258.0, Center: -261.0

Uniformity index: 1.894


Integral non-uniformity: 0.0094

Uniformity Passed?: False


Max Noise Power frequency: 0.0666666

Average Noise Power: 0.182790607802

HU Uniformity (25)

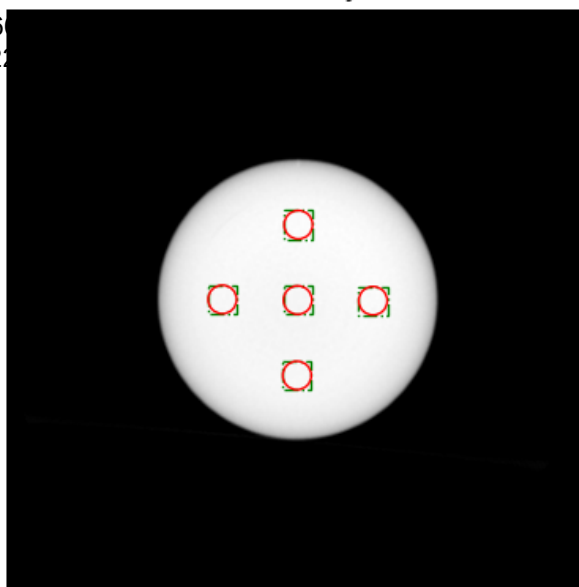


Uniformity Profiles

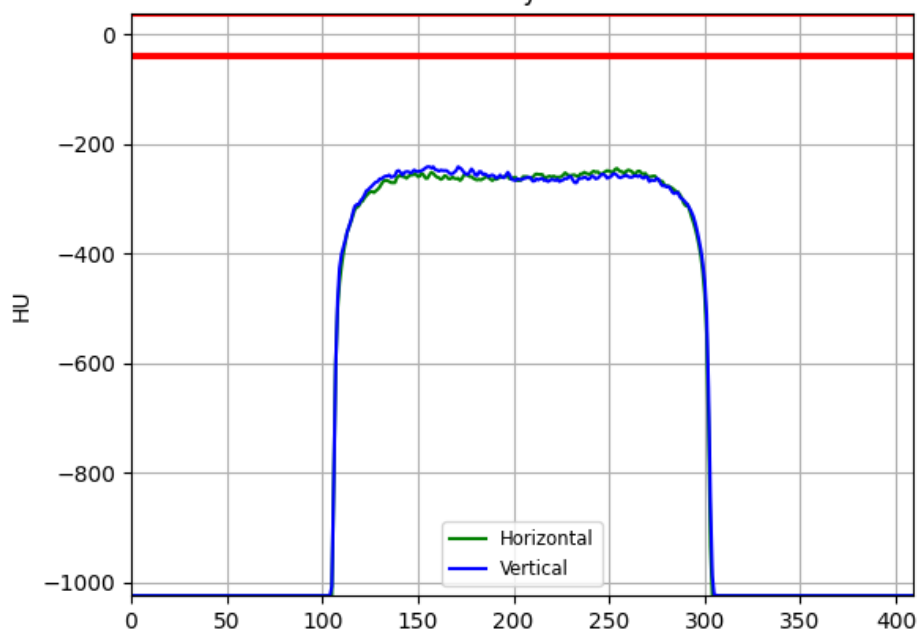

Metadata:
Físico: Físico
Unidade: Versa
Data: 12-01-2025

Side View

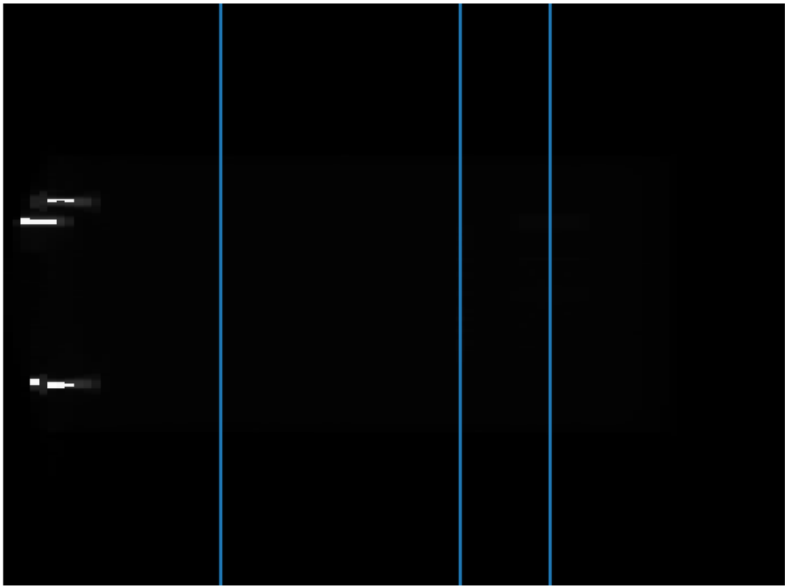

Metadata:

Físico: Físico

Unidade: Versa

Data: 12-01-2025