

Technical Specifications

5MP Compact IR Fisheye AI IP Camera

FOR INTERNAL/EXTERNAL APPLICATION

- 5MP 360° or 180° viewing angle
- H.265, H.264 and MJPEG compression
- Superior low light performance
- Deep Learning - Object Tracker/People Tracker
- SMART Bitrate Control and Region of Interest
- Power over Ethernet (IEEE 802.3af)



CAMERA	
Model	REX-Ai5-360
Image Sensor	SONY STARVIS EXMOR 1/2.8" 5M CMOS
Effective Pixels	2592(H) x 1944(V)
Scanning System	Progressive scanning
AGC Control	Auto
IRIS Type	Auto Exposure
Minimum Illumination	Color : 0.16 Lux / BW : 0 Lux(IR LED On)
Lens	1.19 mm, F2.0
Angle of View	360°
Shutter Time	Auto / Manual: 1/30 ~ 1/32,000, Anti-Flicker, Slow Shutter (1/2, 1/3, 1/5, 1/6, 1/7.5, 1/10)
Day & Night	True Day & Night (Removable IR-cut filter)
Wide Dynamic Range	True WDR (120dB)
S/N Ratio	50 dB

IR ILLUMINATOR	
IR LED	High Power IR LED x 3
IR Working Distance	25m

VIDEO	
Video Compression	H.265, H.264, MJPEG
Profile	H.264 : MP / HP H.265 : MP
Multiple Profile Streaming Performance	2592x1944/30 + 720p30 with H.264, H.265 + MJPEG
Max Resolution	2592 x 1944
Video Bit Rate	100Kbps ~ 25Mbps Multi-rate for Preview and Recording
Bitrate Control	Multi Streaming CBR/VBR (Controllable frame rate and Bandwidth)
Digital Noise Reduction	3D-DNR
Privacy Mask	16 programmable zones
Special Features	SMART Bitrate Control, Region of Interest
Other Image Processing	Configurable Exposure, White Balance, Sharpness
Analogue Output	1 (Installation only) CVBS 1.0V p-p (75Ω), 4:3 aspect ratio

AUDIO	
Audio Streaming	Two way
Audio Compression	G.711 u-law 8KHz
Audio input	Built-in Mic, Supply voltage : 2.4VDC(3mA), Input impedance : 3K Ohm
Audio output	Line Out, MAX. Output Level : 1Vrms

EVENT	
EventTrigger Pre-	Motion Alarm, Temperature critical, DI, VCA(AI)
Post Recording	Pre: 1~5 sec Post: 1~240 sec
Event Notification	FTP, E-mail, Alarm-out, SD card

NETWORK	
Ethernet Standard	10 /100 Base-T
IP	IPv4
Protocol	TCP/IP, UDP, AutoIP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), UPNP, RTCP, SSH, ONVIF
Security	HTTPS(SSL), IP filtering, 802.1x, Digest Authentication
Plug In	ONVIF Profile S/T/M, CGI API

GENERAL	
Material	Aluminum Die-casting
External I/O Terminals	1 x Alarm In / 1 x Alarm Out
Language on webpage	English
Power Source	DC12V, PoE(IEEE 802.3af)
Power Consumption	DC12V Max 8.6W, PoE Max 11.6W
Operating Conditions	Humidity 10 ~ 90% RH (non-condensing) [DC12V / PoE] -30°C ~ 50°C (-22°F ~ 122°F)
Approvals	FCC, CE, IP67, IK10
NDAA	Compliant
Weight	0.5 kg
Dimensions (W x H)	Ø125 mm x 58 mm

EDGE STORAGE	
Storage	1x microSD / microSDHC / microSDXC (card not included)

VIDEO ANALYTICS (Optional)

Features

AnalyticsEngine: RealTrack's advanced tracking algorithm with rich library of detection behaviors

DetectionZones and Rules: 40 rules & zones (Multi-segment Polygons and Lines) as standard

Intrusion Detection: Detection of the presence of an object

Tamper Detection: Supported as standard Detection, Behavior Enter, Exit, Appear, Disappear, Stop, Direction, Dwell filter, Tailgating


Logical Rules: Extends standard rules to allow various combinations of the inputs.

Deep Learning Object Tracking: Deep learning based object identification (as Person, Cyclist, Car, Van, Truck, Motorcycle, Bicycle, Bag) removes false object detection.

Deep Learning People Tracking: Deep learning based people identification and tracking


Counting & Line: High accuracy people and vehicle counting, 20 counters in total.

Meta Data: JSON format, Plain XML format that contains the event information and the tracked object information with the bounding box, tail history, object attributions (object type and color)

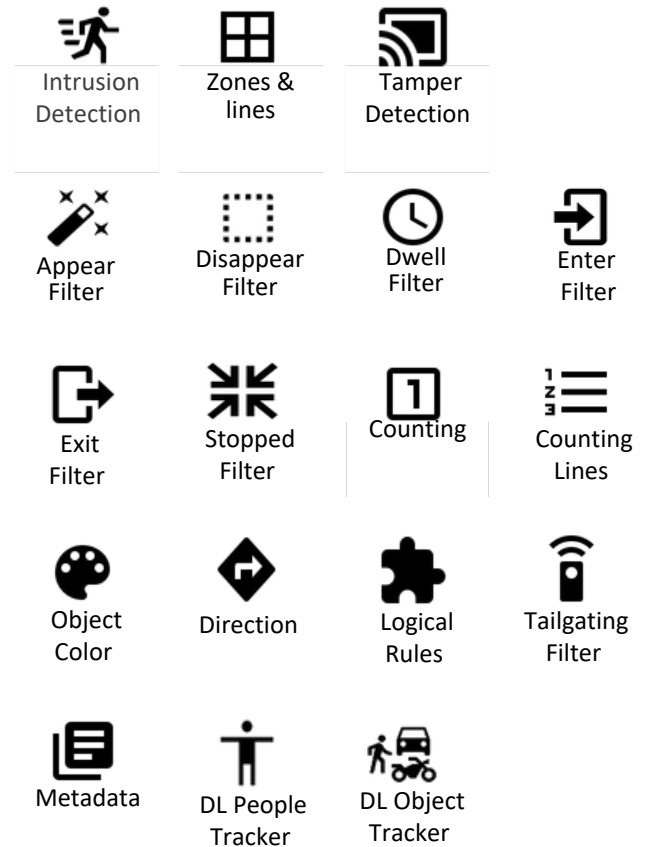

Dimensions

(Unit: mm)

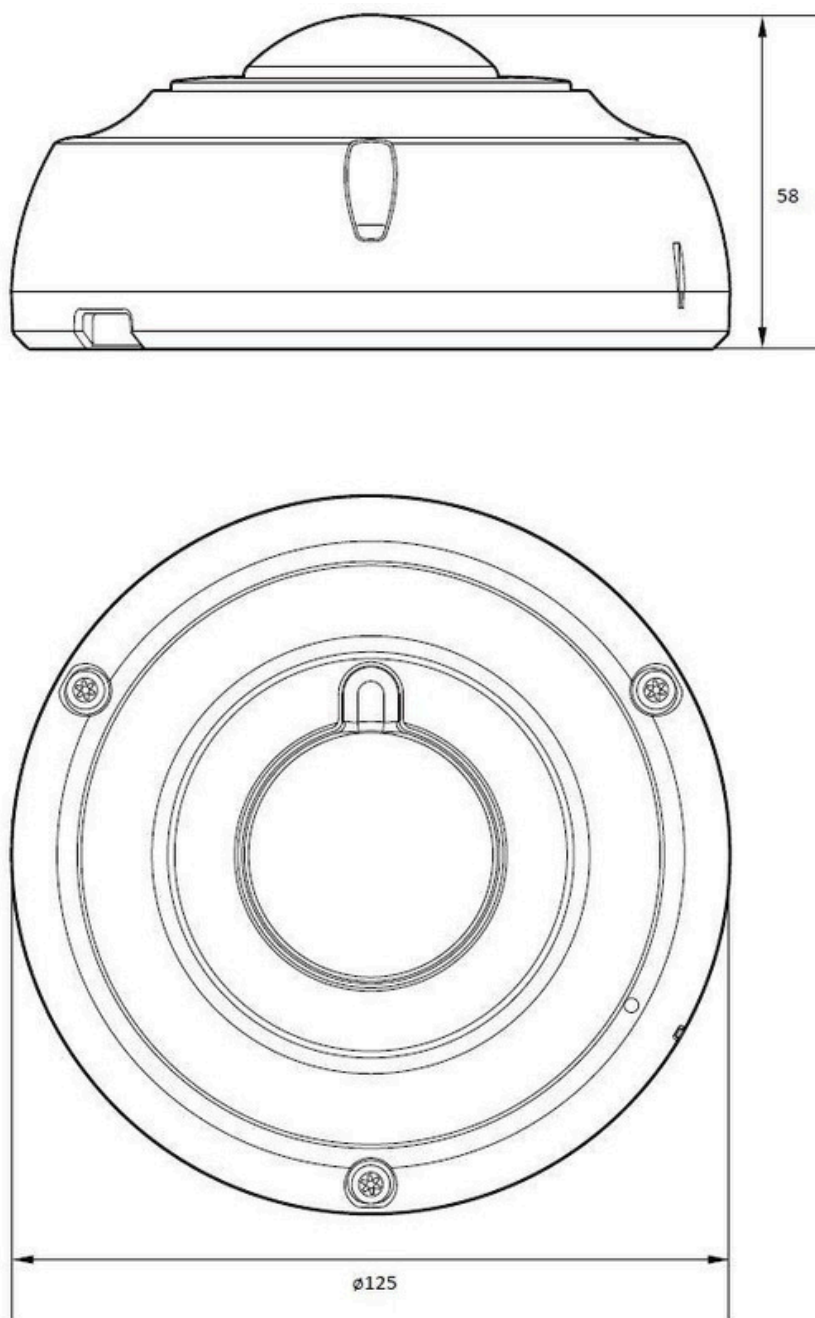



BW10



BC10



BP01



BCO01