Shell **Tellus *S2*** *M*

- Extra protection
- Industrial applications

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **long oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus *S3*** *M* ■ Long life and improved protection ■ Industrial applications	✓✓✓✓	✓✓✓✓	✓✓✓
Shell **Tellus *S2*** *M* ■ Extra protection ■ Industrial applications	✓✓✓	✓✓✓	✓✓✓
Shell **Hydraulic *S1*** *M* ■ Reliable protection ■ Industrial applications	✓	✓	✓

Performance level is a relative indication only.

SHELL'S LEADING INDUSTRIAL HYDRAULIC FLUID

Shell Tellus S2 M uses Shell's unique technology to provide reliable protection and performance in most manufacturing and many mobile equipment operations. Under hot and heavy load conditions, it is a fluid you can rely on to help prevent the damaging deposits and sludge that can make your system less efficient. It is widely recognised and approved by leading equipment manufacturers.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S2 M can help to achieve this by providing

- ***up to 82% less wear***
  than the maximum allowed in the industry-standard hydraulic pump tests.

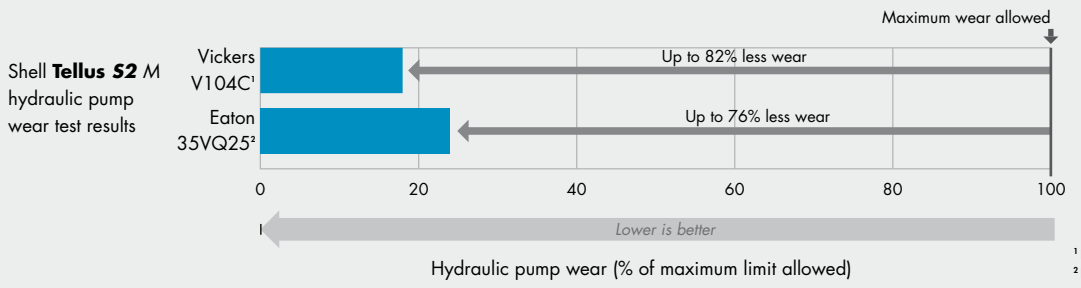

[1] ISO 11158 HM; DIN 51524-2 (HLP oils)
[2] Eaton I-286-S, M-2950-S specifications

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S2 M is designed to help you operate your equipment for longer without interruption – for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S2 M achieved

- ***a two and a half times longer oil life***
  than the industry minimum.

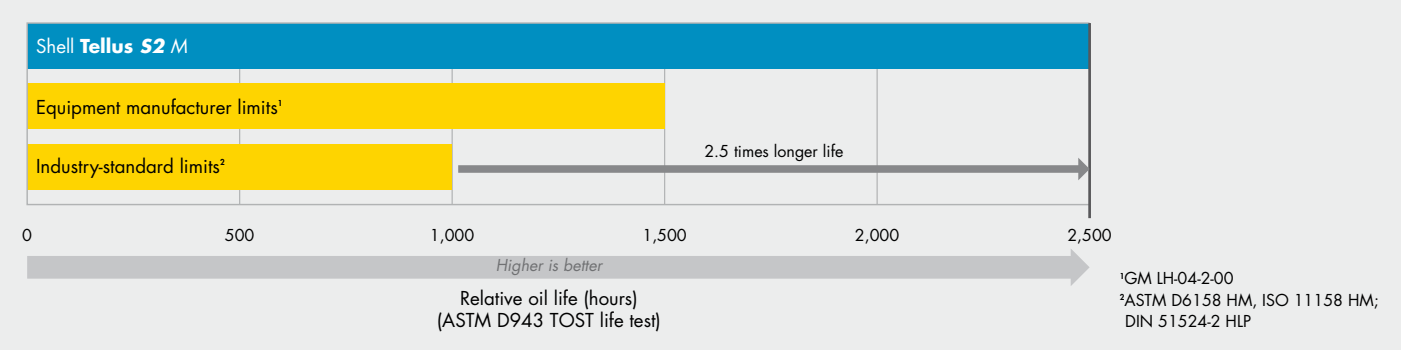

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S2 M is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***up to 34% faster air release***
  for efficient and precise hydraulic power transmission
- ***up to 50% better filterability***
  in the demanding industry standard wet test procedure and excellent resistance to breakdown in the presence of water for more efficient operation.

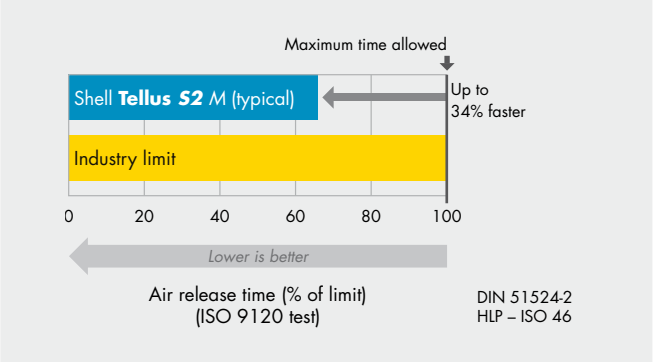

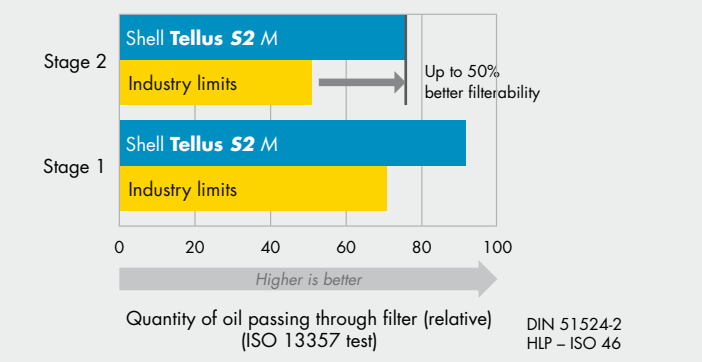

SPECIFICATIONS AND APPROVALS

Shell Tellus S2 M meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 22, 32, 46, 68, 100.

Claims and approvals	Meets requirements
Cincinnati P-68 (ISO 32)	Swedish Standard SS 15 54 34 AM (ISO VG 32)
Cincinnati P-70 (ISO 46)	ISO 11158 HM type
Cincinnati P-69 (ISO 68)	AFNOR NF-E 48-603
Denison HF-0, HF-1, HF-2	ASTM D6158-05 (HM fluids)
Eaton (Vickers) M-2950 S, I-286 S	DIN 51524-2 HLP type

APPLICATIONS

Industrial hydraulic systems – for use in most factory-based and many outdoor industrial hydraulic applications, and supported by over 150 approvals and listings

Mobile hydraulic applications – for use in climates with limited variation in temperature. (For applications with wider temperature ranges, Shell Tellus S2 V is recommended.)

REAL-WORLD VALUE DELIVERY

Many customers around the world have benefited from process and value improvements by switching to Shell Tellus S2 M. For instance:

- a steel mill switched from a budget-brand product and saw valve failures fall from 20 a year to none and reports this was worth $2 million[1] a year in lost production
- customers have benefited from 50–100% longer oil life after switching from competitor products and adopting the Shell LubeAnalyst service to improve machine availability and reduce costs.

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

[1]Saving reported by one customer. Actual savings may vary, depending on the application, the current oil used, the maintenance procedures and the condition of the equipment.

For more information, please contact

Shell **Tellus *S2*** *MA*

- Water tolerant
- Industrial applications

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **long oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus *S2*** *MA* ■ Water tolerant ■ Industrial applications	✓✓✓	✓✓✓	✓✓✓

Performance level is a relative indication only.

A SPECIAL-APPLICATION, DETERGENT-BASED HYDRAULIC FLUID

Shell Tellus S2 MA is designed for uses where emulsifiable fluids are preferred. With proven ashless anti-wear technology, it is a fluid that you can rely on when contamination by aqueous fluids such as cutting fluids is likely or where cleanliness or control of solid contaminants is important.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S2 MA can help to achieve this by providing

- ***up to 93% less wear***
  in industry-standard tests.

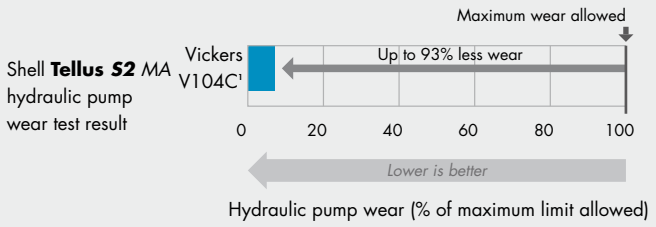

[1] DIN 51524-2-HLP

Excellent wear protection

In addition to offering excellent pump wear protection, Shell Tellus S2 MA also

- ✓ passes FZG gear wear load stage 11
- ✓ has approval for Mueller-Weingarten high-pressure presses.

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S2 MA is designed to help you operate your equipment for longer without interruption – for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S2 MA achieved

- ***up to two and a half times longer oil life***
  than the industry minimum requirement.

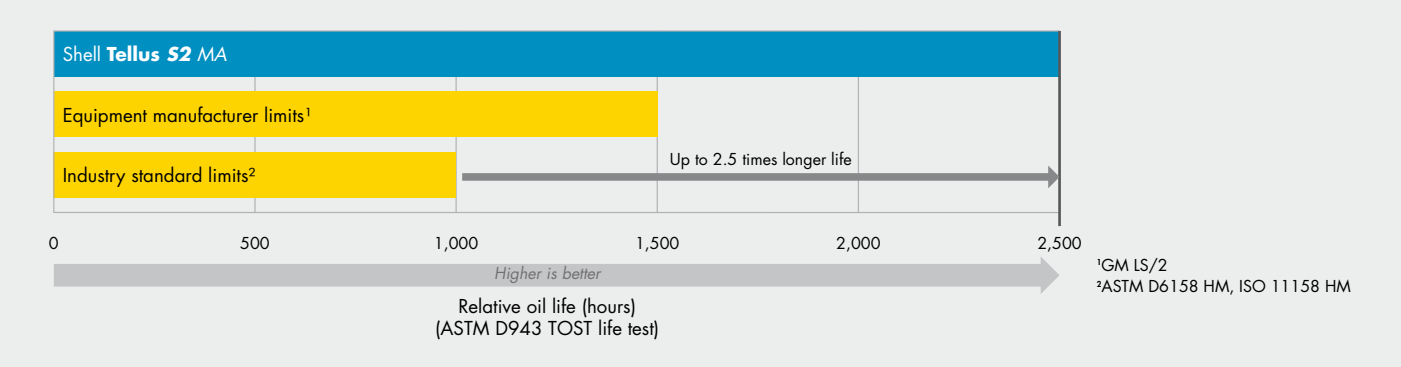

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S2 MA is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***up to 57% faster air release***
  for efficient and precise hydraulic power transmission (ISO 9120).

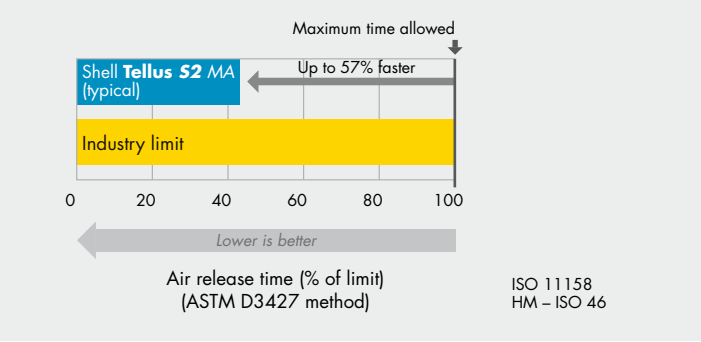

Helping maintain efficiency

- ✓ Good air release for efficient power transmission
- ✓ Detergent action to help maintain system cleanliness
- ✓ Excellent filterability to minimise pressure loss across filters

SPECIFICATIONS AND APPROVALS

Shell Tellus S2 MA meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 10, 32, 46.

Claims and approvals	Meets requirements
Mueller Weingarten (ISO 46)	ISO 11158 (HM fluids) ASTM D6158-05 (HM fluids)

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

APPLICATIONS

Aqueous fluid applications – for use in headstocks and hydraulic controls in metalworking machines such as automatic lathes

Industrial and manufacturing applications – Shell Tellus S2 MA conforms with commonly recommended ISO and ASTM hydraulic fluid standards, which makes it suitable for a wide range of machines and equipment.

For more information, please contact

shell.com/lubricants

Shell **Tellus** ***S2*** *V*

- Extra protection
- Versatile applications

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **long oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus** ***S3*** *V* ■ Long life and improved efficiency ■ Versatile applications	✓✓✓✓	✓✓✓✓	✓✓✓✓
Shell **Tellus** ***S2*** *V* ■ Extra protection ■ Versatile applications	✓✓✓✓	✓✓✓	✓✓✓✓
Shell **Tellus** ***S2*** *M* ■ Extra protection ■ Industrial applications	✓✓✓	✓✓✓	✓✓✓

Performance level is a relative indication only.

AN EXTENDED-TEMPERATURE-RANGE HYDRAULIC FLUID

Shell Tellus S2 V uses a unique additive technology to deliver an oil life over twice the industry standards, excellent pump protection and high efficiency levels. It is a fluid that you can rely on in outdoor or cold environments, as it has been designed to have a wide operating temperature range.

Engineered to maintain its viscosity and performance over the oil-drain interval under severe mechanical stress and under hot and humid conditions, it is the most popular multigrade hydraulic oil in the Shell Tellus range. It is widely recognised and approved by leading equipment manufacturers.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S2 V can help to achieve this by providing

- ***up to 85% less wear***
  than the maximum allowed in the industry-standard hydraulic pump tests

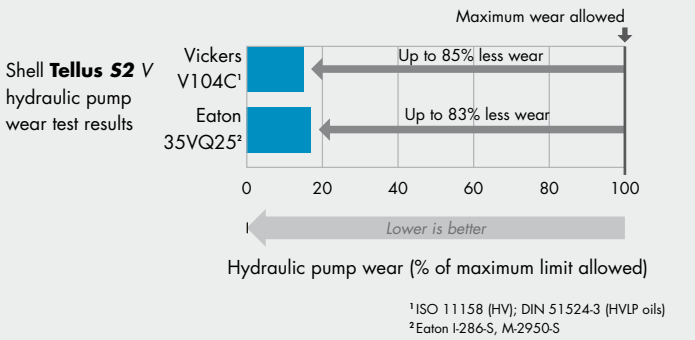

- ***up to 68% better protection against viscosity loss***
  for continuing protection and performance throughout the oil's life.

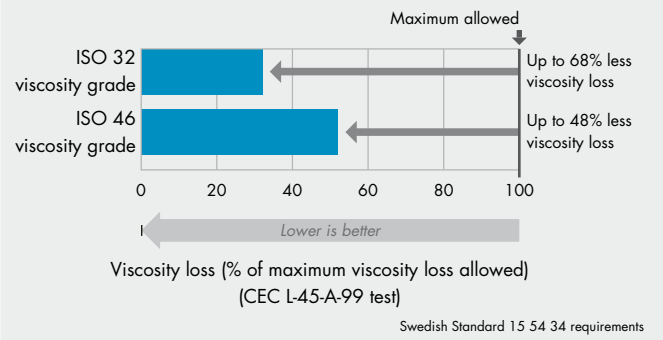

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S2 V is designed to help you operate for longer without interruption – for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S2 V achieved

- ***two and a half times longer oil life***
  than the industry minimum.

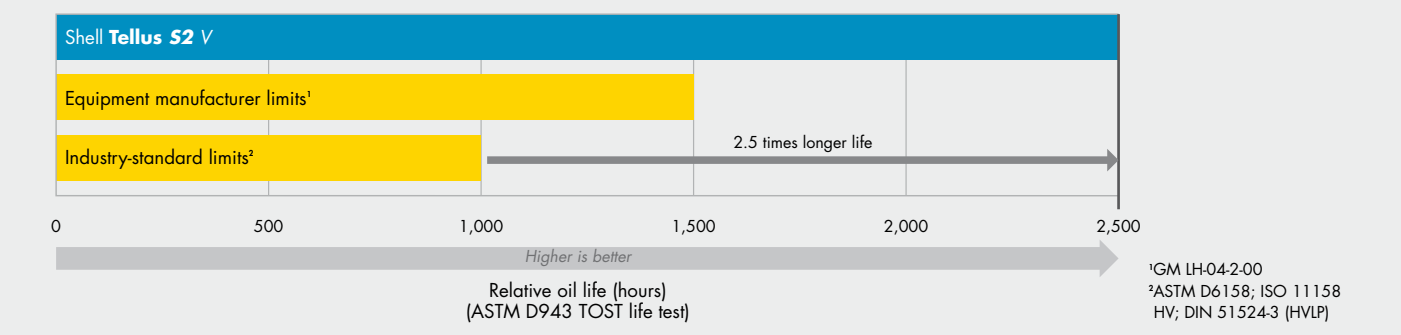

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S2 V is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***up to 62% faster air release***
  for efficient and precise hydraulic power transmission
- ***up to 32% better filterability***
  in the demanding industry-standard wet test procedure to help reduce pressure loss for more efficient operation.

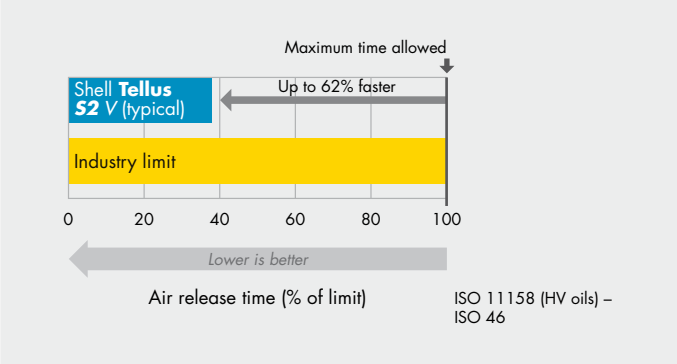

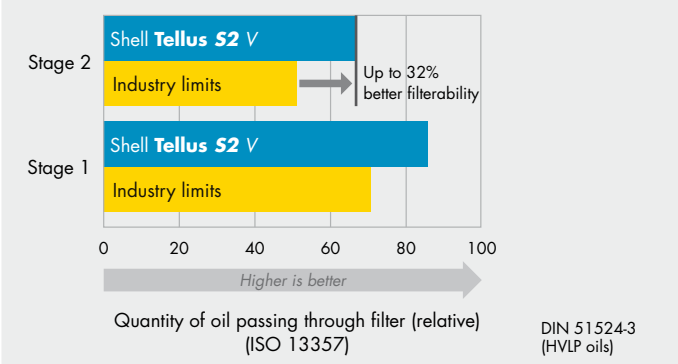

SPECIFICATIONS AND APPROVALS

Shell Tellus S2 V meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 15, 22, 32, 46, 68, 100.

Claims and approvals	Meets requirements
Cincinnati P-68 (ISO 32)	Swedish Standard SS 15 54 34 AM (ISO VG 32)
Cincinnati P-70 (ISO 46)	ISO 11158 HV Type
Cincinnati P-69 (ISO 68)	AFNOR NF-E 48-603
Denison HF-0, HF-1, HF-2	ASTM D6158-05 (HV fluids)
Eaton (Vickers) M-2950 S, I-286 S	DIN 51524-3 HVLP type

APPLICATIONS

Mobile and outdoor hydraulic applications – for exposed environments that are subject to wide temperature variations

Precision hydraulic systems – for good control of fluid viscosity over the operating cycle and excellent fluid filterability

For more information, please contact

REAL-WORLD VALUE DELIVERY

Shell Tellus S2 V has documented value delivery in both stationary and mobile hydraulic applications across a wide range of industries. For instance:

- operators of mobile and exposed plant have increased operational efficiency
- open-cast mining and cement plants have reduced maintenance requirements and sludge-formation-related stoppages by switching from competitor oils
- stationary equipment such as presses have benefited from the fluid's greater temperature-related viscosity stability: one customer has reportedly unlocked maintenance cost savings of over $20,000 a year[1].

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

[1]Saving reported by one customer. Actual savings may vary, depending on the application, the current oil used, the maintenance procedures and the condition of the equipment.

Shell **Tellus *S3*** *M*

- Long life and improved protection
- Industrial applications

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus *S4*** *ME* ■ Extra long life ■ Energy saving	✓✓✓✓✓	✓✓✓✓✓	✓✓✓✓✓
Shell **Tellus *S3*** *M* ■ Long life and improved protection ■ Industrial applications	✓✓✓✓	✓✓✓✓	✓✓✓
Shell **Tellus *S2*** *M* ■ Extra protection ■ Industrial applications	✓✓✓	✓✓✓	✓✓✓

Performance level is a relative indication only.

A PREMIUM ASHLESS INDUSTRIAL HYDRAULIC FLUID

Shell Tellus S3 M uses a unique, advanced ashless technology to deliver up to twice the life of Shell's conventional mainstream products, improved pump protection and high efficiency levels. Engineered to work under hot and heavy load conditions, it is ideal for most manufacturing and many mobile equipment operations.

In addition, its reduced environmental impact (low toxicity towards aquatic life) can help progressive operators to manage the environmental impact of their operations.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S3 M can help to achieve this by providing

- ***up to 91% less wear***
  than maximum allowed in the industry-standard hydraulic pump tests.

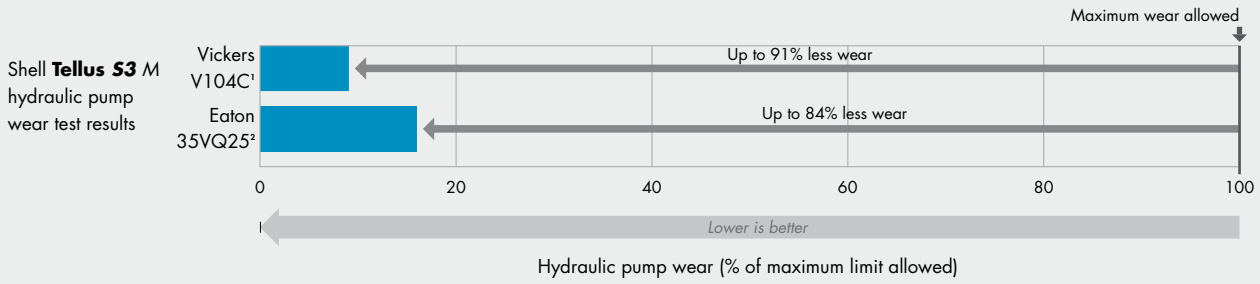

[1] ISO 11158 HM; DIN 51524-2 (HLP oils)
[2] Eaton I-286-S, M-2950-S

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S3 M is designed to help you operate your equipment for longer without interruption – for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S3 M achieved

- ***up to five times longer oil life***
  than the industry minimum.

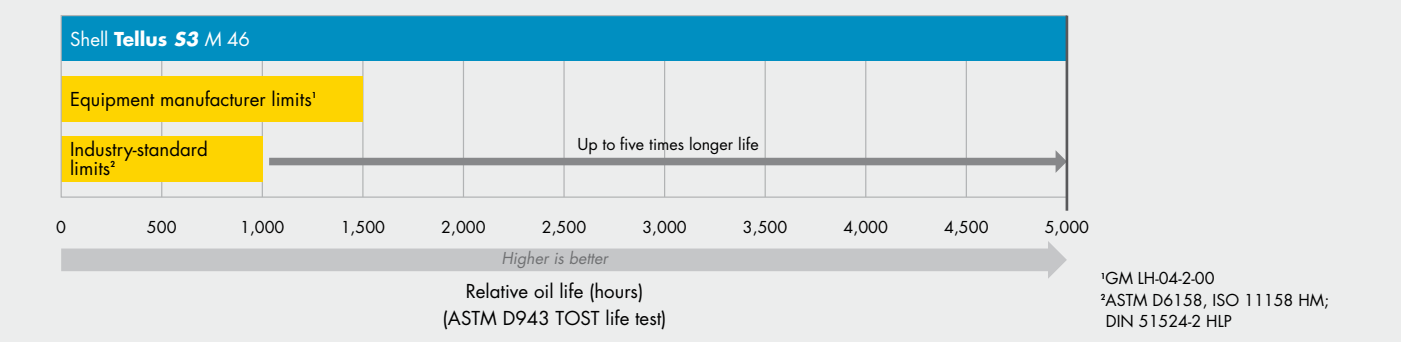

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S3 M is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***up to 48% faster air release***
  for efficient and precise hydraulic power transmission

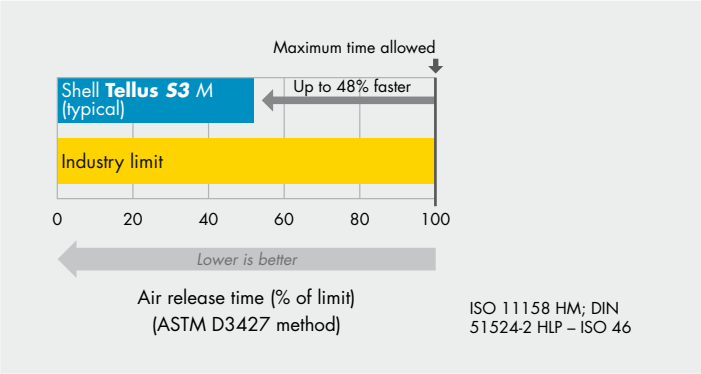

- ***up to 82% better filterability***
  to ensure clean oil, low pressure loss and more efficient operation.

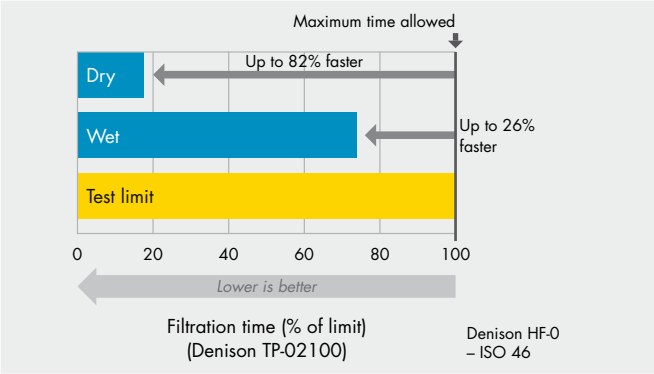

SPECIFICATIONS AND APPROVALS

Shell Tellus S3 M meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 22, 32, 46, 68, 100.

Claims and approvals	Meets requirements
Cincinnati P-68 (ISO 32) Cincinnati P-70 (ISO 46) Cincinnati P-69 (ISO 68)	ISO 11158 HM fluids
Denison HF-0, HF-1, HF-2	AFNOR NF-E 48-603
Eaton (Vickers) M-2950 S, I-286 S	ASTM D6158 (HM mineral oils)
	DIN 51524-2 (HLP oils)
	Swedish Standard SS 15 54 34 AM

APPLICATIONS

Factory-based industrial hydraulic applications – approved by a range of leading equipment manufacturers

Severe-duty, extended-operation and high-load applications – where long life and extra protection is needed

Mobile and outdoor applications – for climates with limited variation in temperature. (Shell Tellus S3 V is recommended for wider variations.)

REAL-WORLD VALUE DELIVERY

A wide variety of customers has unlocked value by moving to a higher quality hydraulic fluid. For instance, some have

- extended their oil-drain interval by up to a factor of two for lower maintenance costs
- increased their hydraulic pump life: one customer has reported repair savings of over $120,000 a year[1]
- enhanced efficiency for responsiveness and precision of movement from start-up to peak operating temperature.

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

[1]Saving reported by one customer. Actual savings may vary, depending on the application, the current oil used, the maintenance procedures and the condition of the equipment.

For more information, please contact

Shell **Tellus** ***S3*** *V*

- Long life and improved efficiency
- Versatile applications

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **long oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus** ***S4*** *VX* **SYNTHETIC** ■ Ultra-low temperature ■ Versatile applications	✓✓✓✓✓	✓✓✓✓	✓✓✓✓✓
Shell **Tellus** ***S3*** *V* ■ Long life and improved efficiency ■ Versatile applications	✓✓✓✓	✓✓✓✓	✓✓✓✓
Shell **Tellus** ***S2*** *V* ■ Extra protection ■ Versatile applications	✓✓✓✓	✓✓✓	✓✓✓✓

Performance level is a relative indication only.

AN EXTENDED-TEMPERATURE-RANGE, PREMIUM, ASHLESS HYDRAULIC FLUID

Shell Tellus S3 V uses a unique, advanced ashless technology to deliver up to five times longer life, improved pump protection and high efficiency levels. It is intended for operators of hydraulic systems in highly loaded, severe service conditions or where wide ranges of ambient or operating temperatures are encountered. In addition, its reduced environmental impact (low toxicity towards aquatic life) can help progressive operators to manage the environmental impact of their operations.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S3 V can help to achieve this by providing

- ***up to 97% less wear***
  than the industry minimum requirement

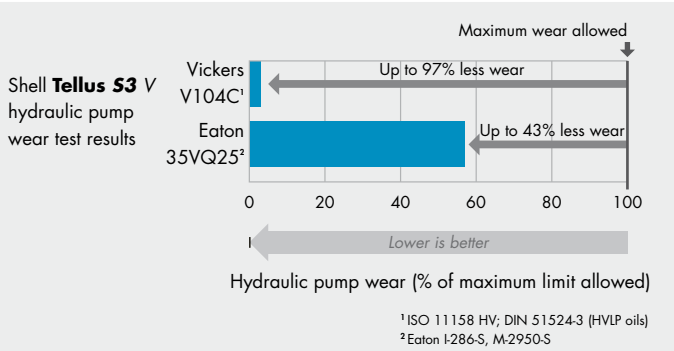

¹ ISO 11158 HV; DIN 51524-3 (HVLP oils)
² Eaton I-286-S, M-2950-S

- ***up to 53% better protection against viscosity loss***
  for continuing protection and performance throughout the oil's life.

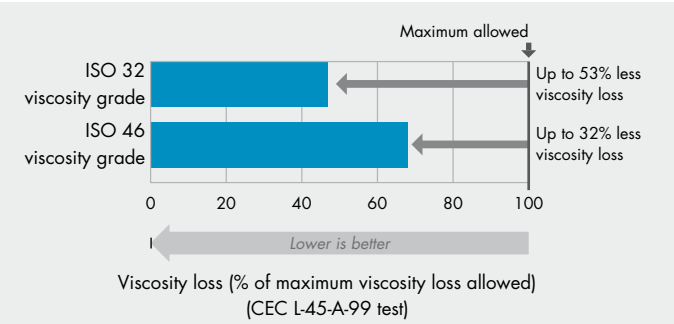

Swedish Standard 15 54 34 requirements

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S3 V is designed to help you operate your equipment for longer without interruption for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S3 V achieved

- ***up to five times longer oil life***
  than the industry minimum.

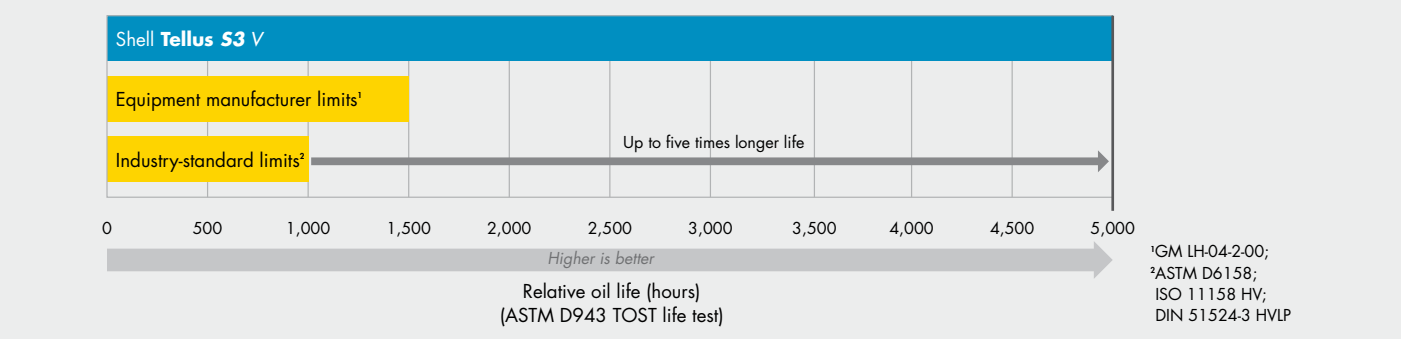

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S3 V is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***up to 56% faster air release***
  for efficient and precise hydraulic power transmission

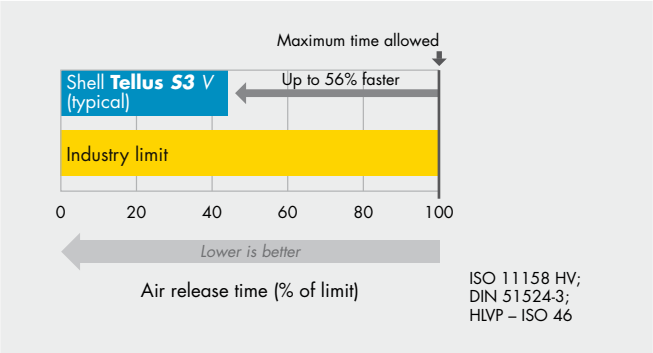

- ***up to 58% better filterability***
  in the demanding industry-standard wet test procedure, which helps to reduce pressure loss for more efficient operation.

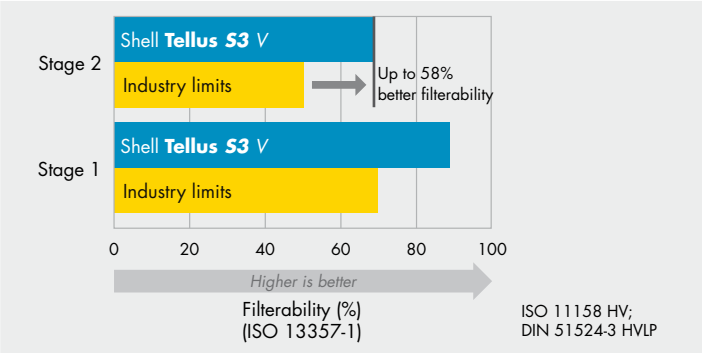

SPECIFICATIONS AND APPROVALS

Shell Tellus S3 V meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 32, 46, 68.

Claims and approvals	Meets requirements
Cincinnati P-68 (ISO 32)	ISO 11158 HV type
Cincinnati P-70 (ISO 46)	AFNOR NF-E 48-603
Cincinnati P-69 (ISO 68)	ASTM D6158 (HV mineral oils)
Denison HF-0, HF-1, HF-2	DIN 51524-3 (HVLP oils)
Eaton (Vickers) M-2950 S, I-286 S	Swedish Standard SS 15 54 34 AV (ISO VG 46 and 68)
	Swedish Standard SS 15 54 34 AM (ISO VG 32)

APPLICATIONS

Mobile and outdoor hydraulic applications – for exposed environments subject to wide temperature variations, and to reduce environmental impact in the event of a leak or accidental spillage

Precision hydraulic systems – for good control of fluid viscosity over the operating cycle and excellent fluid filterability

REAL-WORLD VALUE DELIVERY

A wide variety of customers has unlocked value by moving to a higher quality hydraulic fluid. For instance, some have reported that they have

- extended their oi-drain interval by up to a factor of two for lower maintenance costs
- increased their hydraulic pump life: repair cost savings of over $120,000 a year[1] have been reported
- enhanced efficiency through responsiveness and precision of movement from start-up to peak operating temperature.

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

[1]Saving reported by one customer. Actual savings may vary, depending on the application, the current oil used, the maintenance procedures and the condition of the equipment.

For more information, please contact

Shell **Tellus** ***S4*** *ME*

- Extra long life
- Energy saving

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **long oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus** ***S4*** *ME* ■ Extra long life ■ Energy saving	✓✓✓✓✓	✓✓✓✓✓	✓✓✓✓✓
Shell **Tellus** ***S3*** *M* ■ Long life and improved protection ■ Industrial applications	✓✓✓✓	✓✓✓✓	✓✓✓

Performance level is a relative indication only.

A SYNTHETIC FLUID TO HELP ENHANCE HYDRAULIC SYSTEM EFFICIENCY

Shell Tellus S4 ME uses advanced, ashless, synthetic technology and is designed to help deliver value to your business. Proved to improve energy efficiency, it has the ability to increase oil life by up to four times compared with conventional oils in the Shell range and to prolong equipment life by enhancing hydraulic pump wear protection.

In addition, its reduced environmental impact (low toxicity towards aquatic life) can help progressive operators to manage the environmental impact of their operations.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S4 ME can help to achieve this by providing

- ***up to 89% less wear***
  than the maximum allowed in the industry-standard hydraulic pump tests.

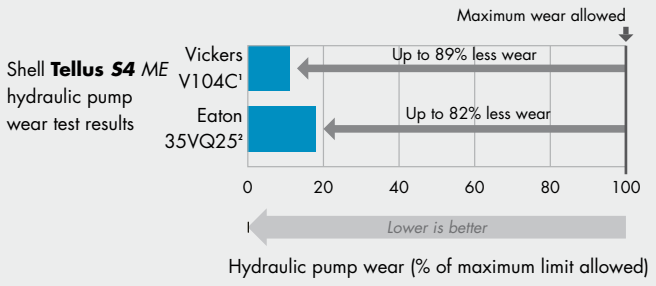

[1] ISO 11158 HM; DIN 51524-2 HLP
[2] Eaton I-286-S, M-2950-S

Enhanced protection formulation[3]

- ✓ Synthetic base oils for excellent viscosity control
- ✓ Enhanced flow properties at lower temperatures
- ✓ Advanced, ashless anti-wear additives
- ✓ Demonstrated exceptional wear control

[3] Compared with conventional oils of the same viscosity grades

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S4 ME is designed to help you operate your equipment for longer without interruption – for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S4 ME achieved

- ***over 10 times longer oil life***
  than the industry minimum.

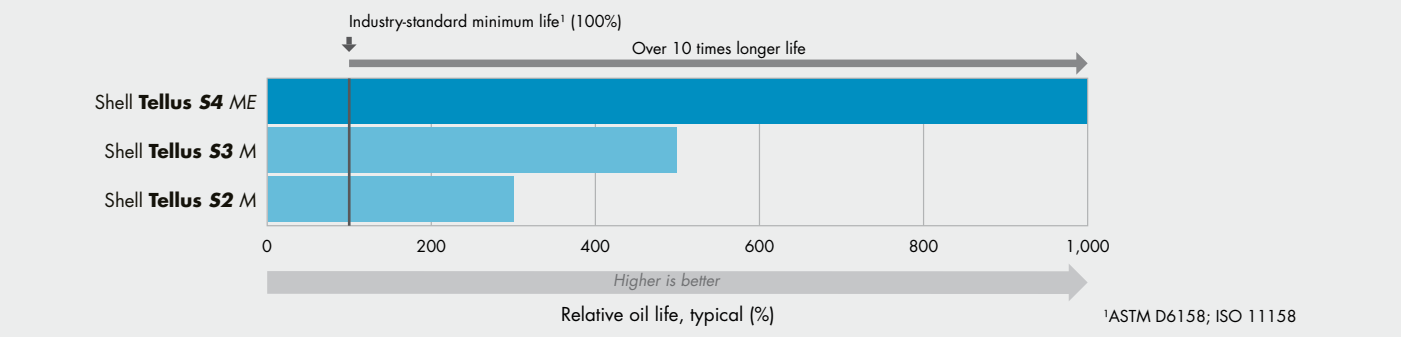

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S4 ME is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***up to 69% faster filtration***
  to help reduce pressure loss across the filter for more efficient operation.

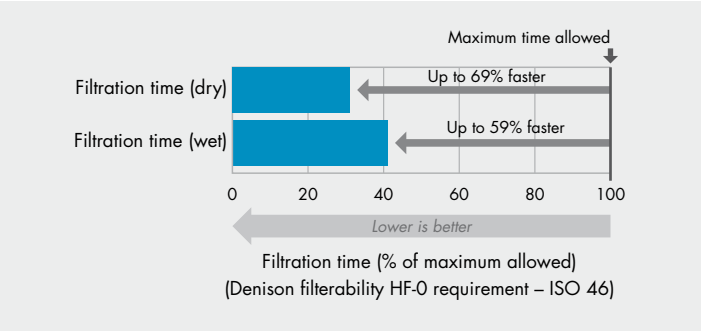

Proved to improve efficiency

- ✓ Statistically validated energy efficiency savings in industrial applications with intensive hydraulic power use
- ✓ Can help to improve machine speed and productivity
- ✓ Exceptional air release and other efficiency performance measures

SPECIFICATIONS AND APPROVALS

Shell Tellus S4 ME meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 22, 32, 46, 68.

Claims and approvals	Meets requirements
Cincinnati P-68 (ISO 32)	ASTM D6158 (HM mineral oils)
Cincinnati P-70 (ISO 46)	ISO 11158 HM fluids
Cincinnati P-69 (ISO 68)	DIN 51524-2 (HLP oils)
Denison HF-0, HF-1, HF-2	Swedish Standard SS 15 54 34 AM
Eaton (Vickers) M-2950 S, I-286 S	AFNOR NF-E 48-60
Bosch Rexroth	Krauss Maffei
Arburg	

APPLICATIONS

Particularly suitable for industrial systems requiring high-intensity hydraulic power such as plastic injection moulding, metal pressing and other applications where Shell Tellus S4 ME has demonstrated efficiency improvements

High temperature and pressure applications – for extended operations. Shell Tellus S4 ME has the longest oil life of any Shell hydraulic fluid.

Mobile and outdoor applications – for use in climates with limited variations in temperature. (For applications in ultra-low temperatures, Shell Tellus S4 VX is recommended.)

REAL-WORLD VALUE DELIVERY

Shell Tellus S4 ME has unlocked operational improvements in a range of applications. For instance, some customers have

- increased productivity by up to 3%
- significantly reduced their fluid and machine maintenance
- enhanced energy efficiency by up to 13.9%.

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

For more information, please contact

Shell **Tellus** ***S4*** *VX*

- Ultra-low temperature
- Versatile applications

DESIGNED TO MEET CHALLENGES

Every part of your machine or process has been meticulously engineered, so you want to use a lubricant that has been designed to ensure that your equipment is well protected and works efficiently.

The Shell Tellus range of hydraulic fluids has been developed to enable equipment operators to select the oil that will deliver optimum value to their operations through

- **wear protection**
- **long oil life**
- **system efficiency.**

Performance at a glance

	Protection	Oil life	System efficiency
Shell **Tellus** ***S4*** *VX* ■ Ultra-low temperature ■ Versatile applications	✓✓✓✓✓	✓✓✓✓	✓✓✓✓
Shell **Tellus** ***S3*** *V* ■ Long life and improved efficiency ■ Versatile applications	✓✓✓✓	✓✓✓✓	✓✓✓✓

Performance level is a relative indication only.

A SPECIAL-APPLICATION HYDRAULIC FLUID FOR ULTRA-LOW TEMPERATURES

Shell Tellus S4 VX features a unique, advanced, ashless technology for extended fluid life and superb wear protection. Moreover, through its specially selected base fluids, it has the widest operating temperature range in the Shell Tellus range, so you can rely on it even at the ultra-low temperatures (as low as –50°C) that are found in Arctic and exposed mining and forestry operations.

In addition, its reduced environmental impact (low toxicity towards aquatic life) can help progressive operators to manage the environmental impact of their operations.

IMPROVED CLEANLINESS: All Shell Tellus products now meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

DESIGNED TO PROTECT

Protecting components from damage can help to increase service life and maximise your return on investment. Shell Tellus S4 VX can help to achieve this by providing

- ***up to 95% less wear***
  than the industry standard to help equipment last longer

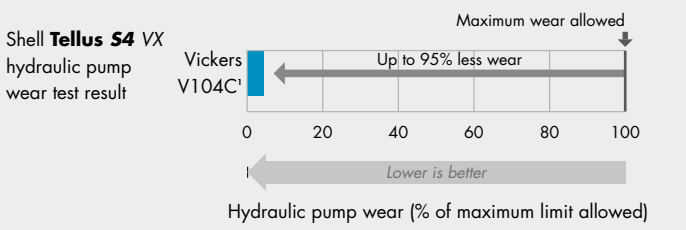

[1] ISO 11158 HV; DIN 51524-3 HVLP

- ***an operating temperature range up to 28% wider***
  than conventional fluids for increased protection at very low temperatures.

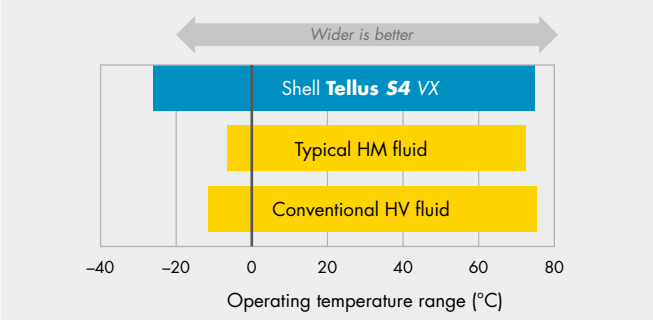

DESIGNED FOR LONG OIL LIFE

Limiting fluid degradation can help to prolong oil life. Shell Tellus S4 VX is designed to help you operate your equipment for longer without interruption – for reduced maintenance requirements and enhanced productivity. In the industry-standard oil life test, Shell Tellus S4 VX achieved

- ***up to five times longer oil life***
  than the industry minimum

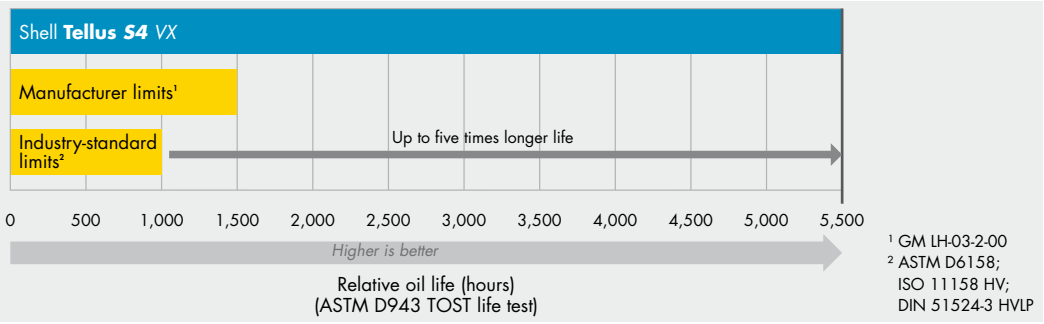

Exceptional cleanliness to help efficiency: Shell Tellus S4 VX achieved virtually deposit-free performance in the demanding Bosch Rexroth A4 VG piston pump test.

DESIGNED FOR HIGH EFFICIENCY

A hydraulic fluid needs to protect, lubricate and transmit power efficiently. Shell Tellus S4 VX is designed to help maximise productivity by helping equipment to meet or exceed its design capabilities. Compared with the industry minimum requirements, it offers

- ***an extra-low pour point***
  for enhanced low-temperature flow to help ensure start-up under extra-cold conditions

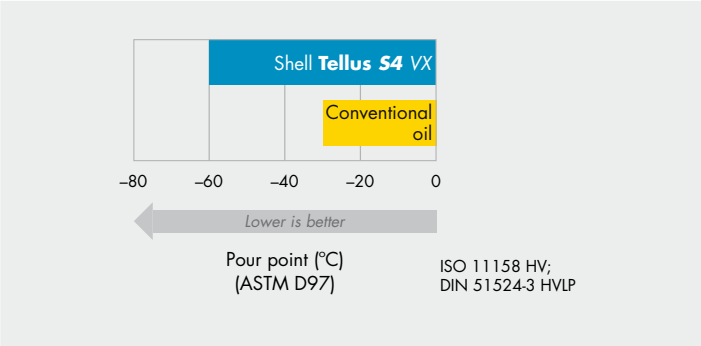

- ***an extra-high viscosity index***
  for consistent, efficient operation and protection from cold start-up to normal operating conditions.

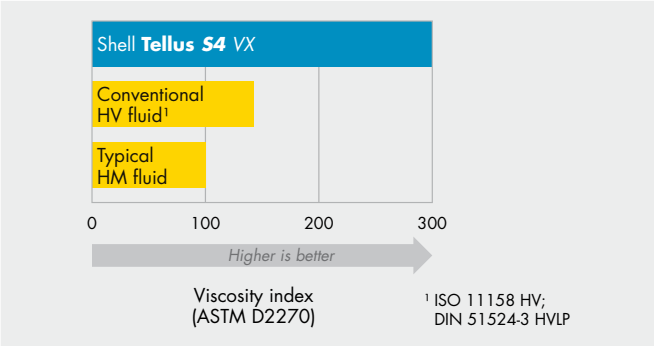

SPECIFICATIONS AND APPROVALS

Shell Tellus S4 VX meets the requirements of a wide range of industry bodies and equipment manufacturers. ISO viscosity grades available: 32.

Claims and approvals	Meets requirements
Komatsu Mining (operation in cold and Arctic conditions, –50 to 35°C).	Frigoscandia (low-temperature hydraulic systems) DIETZ automation (servo valve and proportional valve test equipment)

APPLICATIONS

Low-temperature hydraulic applications – for use in temperatures as low as –50°C

Mobile and exposed hydraulic applications – for use where the maximum operating temperature does not exceed 75°C. (For operating temperatures greater than this, Shell Tellus S4 ME is recommended.)

REAL-WORLD VALUE DELIVERY

Operators that need to run hydraulic equipment in extreme cold have benefited from the use of Shell Tellus S4 VX because it can help to deliver high levels of

- equipment availability – start-up is easy and maintenance requirements are reduced
- productivity – it delivers responsive operation all year round
- efficiency – energy losses due to pumping hydraulic fluid at low temperatures are controlled.

FULL PRODUCT AND SERVICE PORTFOLIO

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.

For more information, please contact