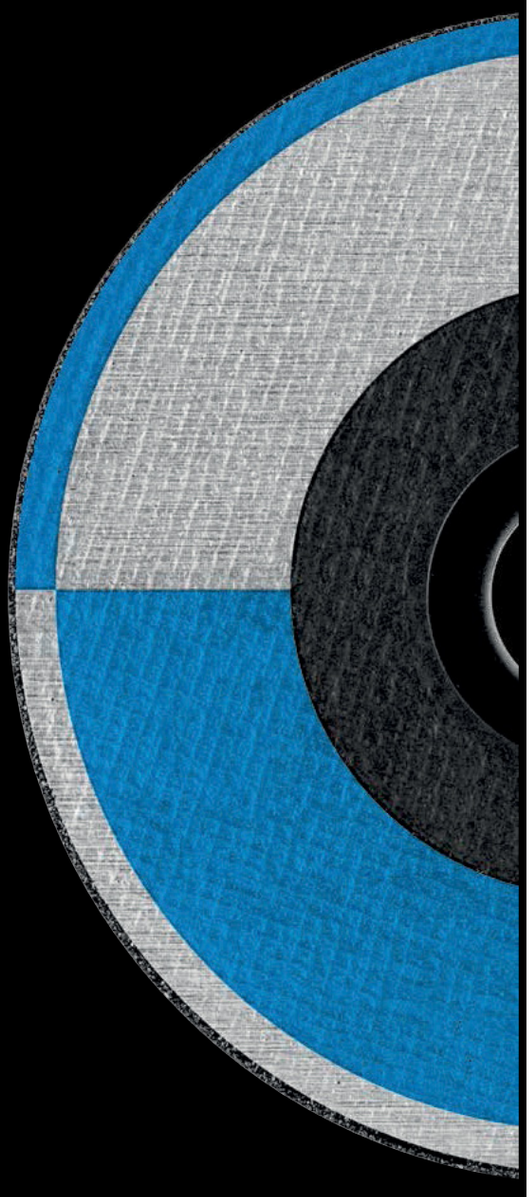


MINI CATALOGUE

A Company of the SWAROVSKI Group
www.tyrolit.com

TYROLIT

Final.indd 1 4/28/15 4:15 PM

MATERIAL

- Steel
- 2in1 steel/stainless steel
- High-speed steel
- Universal
- Abrasive materials
- 2in1 aluminium/stone
- Rails
- All in One
- Asphalt
- 3in1 cast iron/steel/stainless steel
- Tiles
- Stainless steel
- 2in1 aluminium/stainless steel
- Carbide metal
- Concrete
- Paint/lacquer
- Gel coat
- Plastic
- Marble
- Wood
- Cast iron
- Stone
- Titanium
- Hard stone
- Composites
- Nonferrous metals

Quality lines

TYROLIT has been one of the leading manufacturers of tools for every professional andapplication for almost 100 years.

To make your search for the ideal tool easier, we have divided our range into three performance levels. This enables us to offer the perfect solution for every application!



PREMIUM★★★

- Maximum cutting ability and stock removal rate
- Above-average lifetime
- The best work results
- Maximum economic efficiency
- Extensive product range - the perfect product for every application
- Use of the most innovative technology and the best raw materials
- Maximum comfort for the user thanks to low vibration and noise levels

STANDARD★★

- Excellent cutting ability and stock removal rate
- Excellent service life
- Exceptional work results
- High level of economic efficiency
- Large product range - for the most important applications

BASIC★

- Good cutting ability and stock removal rate
- Good service life
- Good work results

Colour codes



Label	Steel	2in1/3in1	INOX	Nonferrous metals	Cast iron	Stone
Colour code	Blue	Blue	Red	Orange	Purple	Green
Material	Steel	2in1 = Steel and stainless steel, 3in1 = Steel, stainless steel and cast iron	Stainless steel	Aluminium, copper, zinc, brass, bronze, stone	Cast materials	Stone

Final.indd 2 4/28/15 4:15 PM



PREMIUM★★★ CUT-OFF WHEELS
2IN1 WITH DEEP CUT PROTECTION FOR STEEL AND STAINLESS STEEL

+ **Enhanced safety**
The DEEP Cut protection metal bushing we have developed prevents the crown being removed from the wheel and thus a break out of the bore.

+ **Greater economic efficiency**
The longer range of application means that wheel changes are reduced.



+ **Versatile application options**
It is ideal for small sheet metal, profile and pipe cross-sections. Rods and metal reinforcements can also be cut effortlessly.

TYROLIT Film
The product film can be found on YouTube at **www.youtube.com/TYROLITgroup**

Using newly developed technology and new materials we have succeeded in taking another step towards improved user safety. The PREMIUM*** cut-off wheel with DEEP Cut Protection enables the user to achieve maximum insertion depths into the workpiece without damaging the wheel. There is no risk of sharp workpiece edges removing the crown.

PREMIUM★★★ CUT-OFF WHEELS
2in1 with DEEP Cut Protection for steel and stainless steel

Using newly developed technology and new materials we have succeeded in taking another step towards improved user safety. The PREMIUM*** cut-off wheel with DEEP Cut Protection enables the user to achieve maximum insertion depths into the workpiece without damaging the wheel.

There is no risk of sharp workpiece edges removing the crown.



Shape		Type no.	Dimension	Specification	PU
42		34042238	115x1.2x22.23	TA60P-BFXA	25
		34042239	125x1.2x22.23	TA60P-BFXA	25
		34042240	150x1.2x22.23	TA60P-BFXA	25

PREMIUM★★★ CUT AND GRIND
With DEEP Cut Protection for steel and stainless steel

With the introduction of the PREMIUM*** CUT AND GRIND it has become possible to perform applications such as grinding, deburring and shaping as well as cutting and plunging with only one tool. TYROLIT has now refined this technology. The wheels now have a thinner width of 2.0 mm and offer additional safety for the user with the new DEEP Cut Protection.

The risk of sharp workpiece edges removing the crown from the wheel and the consequent break out of the bore is prevented.



Shape		Type no.	Dimension	Specification	PU
27EC		34042756	115x2.0x22.23	A46Q-BFXA	25
		34042757	125x2.0x22.23	A46Q-BFXA	25

Final.indd 3 4/28/15 4:15 PM



CUT-OFF WHEELS

PREMIUM★★★ CUT AND GRIND
2in1 for steel and stainless steel

With the introduction of the PREMIUM*** CUT AND GRIND it has become possible to perform applications such as grinding, deburring and shaping as well as cutting and plunging with only one tool. The design of the wheel guarantees the highest performance right from the start without compromising on safety.

While it provides versatile application options, the CUT AND GRIND complies with the highest safety standards.

	Shape		Type no.	Dimension	Specification	PU
		27EC	743946	150x3.0x22.23	A30Q-BFXA	25
			743947	178x3.5x22.23	A30Q-BFXA	25

BASIC★ CUT AND GRIND
2in1 for steel and stainless steel

The BASIC* CUT AND GRIND makes it possible to perform applications, such as grinding, deburring and shaping as well as cutting and plunging, with only one tool. The design of the wheel guarantees good performance right from the start without compromising on safety.

While it provides versatile application options, the CUT AND GRIND complies with the highest safety standards

	Shape		Type no.	Dimension	Specification	PU
		27CC	743938	100x2.5x16	A30Q-BF	25
			743942	115x2.5x22.23	A30Q-BF	25
			757089	125x2.8x22.23	A30Q-BF	25
			743944	178x3.5x22.23	A30Q-BF	25

BASIC★ CUT-OFF WHEELS
For stainless steel

The BASIC* cut-off wheel for stainless steel can be used to cut metal sheets, profiles, pipes, rods with small diameters and solid material. The chemical purity of this tool is a requirement of machining stainless steel in order to avoid impairments to the material, such as corrosion, pitting corrosion or a reduction in the fatigue strength.

The 1.0 mm thick cut-off wheels are particularly suitable for quick, comfortable and low-burr cutting.

	Shape		Type no.	Dimension	Specification	PU
		41	456491*	100x1.0x10	A60R-BFINOX	25
			222893*	100x1.0x16	A60R-BFINOX	25
			222894*	115x1.0x22.23	A60R-BFINOX	25
			222896*	125x1.0x22.23	A60R-BFINOX	25

**Super-thin cut-off wheels*

Final.indd 4 4/28/15 4:15 PM



CUT-OFF WHEELS

BASIC★ CUT-OFF WHEELS
for steel



Shape	Type no.	Dimension	Specification	PU
42	497931	100x3x16	A30-BF *	25
	497933	115x3x22,23	A30-BF *	25
	497934	125x3x22,23	A30-BF *	25
	309581	178x3x22,23	A30-BF *	25
	497935	230x3x22,23	A30-BF *	25

BASIC★ CUT-OFF WHEELS
for stainnless steel



Shape	Type no.	Dimension	Specification	PU
42	497936	100x3x16	A30-BFINOX	25
	497937	115x3x22,23	A30-BFINOX	25
	497939	125x3x22,23	A30-BFINOX	25
	497943	178x3x22,23	A30-BFINOX	25
	497945	230x3x22,23	A30-BFINOX	25

BASIC★ CUT-OFF WHEELS
2in1 for steel and stainless steel

This tool is designed for use on both steel and stainless steel. Our BASIC* cut-off wheel 2in1 has an excellent lifetime and stability. The tool is suitable for cutting metal sheets, profiles, pipes, rods and solid material. The 1.6 mm cut-off wheel available in the BASIC* assortment is particularly suitable for fast, convenient and low-burr work. The stable cut-off wheels in thicknesses between 2.0 and 3.0 mm have a very long lifetime and are suitable for universal use.



Shape	Type no.	Dimension	Specification	PU
42	222996	100x2.5x16	A30-BF	25
	222998	125x2.5x22.23	A30-BF	25
	223000	178x3x22.23	A30-BF	25
	223002	230x3x22.23	A30-BF	25

BASIC★ CUT-OFF WHEELS
for steel

This special tool is ideal for cutting workpieces with large cross-sections, as well as solid material and profiles. The internal reinforcement and rough side surfaces enable low burr cutting of workpieces.

As with all TYROLIT BASIC* cut-off wheels, this tool has been optimised to achieve excellent cutting ability and lifetime.



Shape	Type no.	Dimension	Specification	PU
41	223032	300x2.5x25.4	A46S-BF	10
	223033	350x2.8x25.4	A46S-BF	10
	485530	400x3x25,4	A46-BF	10
	546692	350x3x25,4	A36-BF	10
	546696	400x3x25,4	A36-BF	10

Final.indd 5 4:16 15/28/4 PM



GRINDING WHEELS

BASIC★ ROUGH GRINDING WHEEL
2in1 for steel and stainless steel

This rough grinding wheel is particularly suitable for steel and stainless steel applications due to its softer design. In addition, the BASIC* 2in1 is quick and convenient to use and requires minimal effort.

This tool can be used universally and is equally suitable for surface and edge grinding applications.



Shape	Type no.	Dimension	Specification	PU
27	222854	100x6.0x16	A30Q-BF	10
	222858	115x6.0x22.23	A30Q-BF	10
	222860	125x6.0x22.23	A30Q-BF	10
	222863	178x6.0x22.23	A30Q-BF	10
	222865	230x6.0x22.23	A30Q-BF	10

BASIC★ ROUGH GRINDING WHEEL
For Back Chipping and Foundry Application



Shape	Type no.	Dimension	Specification	PU
27	20006668	100x4x16	A30-BF	10
	20006669	115x4x22,20	A30-BF	10
	20006671	125x4x22.23	A30-BF	10
	20006672	178x4x22.23	A30-BF	10

BASIC★ ROUGH GRINDING WHEEL
PIPELINER 2in1 for steel and stainless steel

The Basic* PIPELINER has been developed for V-groove applications. Specifically in pipeline construction, it is necessary to chamfer the pipe ends in order to subsequently weld them together. As they only comprise one grain layer, they provide for even wear on the workpiece.
The PIPELINER is a 2in1 rough grinding wheel and is therefore equally suitable for steel and stainless steel.



Shape	Type no.	Dimension	Specification	PU
27	734693	178x7.0x22.23	A30Q-BF PIPE	10

BASIC★ GRINDING WHEEL
TOUCH for stainless steel and nonferrous metals

The semi-flexible BASIC* TOUCH combines the advantages of various products in one tool. The “waffle” structure enables cool grinding with good chip transport. In addition, the risk of material discolouration is reduced. The unique structure and low weight of the TOUCH suppresses vibrations, ensuring quiet operation and sound reduction.

The wheel also facilitates ideal adaptation to workpieces for grinding, deburring and shaping work. It is also possible to cut nonferrous metals.



Shape	Type no.	Dimension	Specification	PU
29T	236317	100x16	WA46R-BF	25
	236318	115x22.23	WA46R-BF	25
	236319	125x22.23	WA46R-BF	25
	236320	178x22.23	WA46R-BF	25

Final.indd 6 4:16 15/28/4 PM



FLAP DISC
FOR STEEL AND STAINLESS STEEL

+ **Excellent overall abrasion**
Offers not only a long service life, but also exceptional results in terms of abrasiveness.



The PREMIUM*** LONGLIFE flap disc offers the longest lifetime and an excellent stock removal rate. This flap disc is used both on high alloyed steels and stainless steel, as well as on unalloyed and low alloyed steels. Problem-free welding as well as edge and surface grinding, particularly when used on powerful angle grinders.

Applications

The flap discs are suitable for grinding work, deburring, trimming, bevelling, cleaning and surface improvement on metals of any kind.

Consumer Groups

- Repair workshops, locksmith's shops, forging workshops, shipbuilding, automotive and supplier industry
- Engineering and container construction, reactor construction, foundries, maintenance

Quality

- Good stock removal
- High surface quality
- Suitable for various materials
- No clogging of the tool (flap structure)
- High utilisation of the grinding flaps due to fibreglass core with self-resetting wear

Application Tips

- Oscillating grinding movement and alternating setting angle (= grinding angle) allow optimum utilisation of the flap disc.
- Use for grinding operations where the surface finish is a priority
- Regular breaks in the work prevent the angle grinder from overheating (grinding dust, abrasive cloth particles)

MATERIALS, WORKPIECES



- Steel/cast steel and nonferrous metals with abrasive A
- Stainless steel/INOX and cast materials with abrasive ZA

Final.indd 7 4/28/15 4:16 PM



FLAP DISC

BASIC★ FLAP DISC

2in1 for steel and stainless steel



Shape	Type no.	Dimension	Specification	PU
27A	474872	100x16	ZA40-B	10
	474874	100x16	ZA60-B	10
	474875	100x16	ZA80-B	10
	474877	100x16	ZA120-B	10
	273884	115x22.23	ZA40-B	10
	273810	115x22.23	ZA60-B	10
	273871	115x22.23	ZA80-B	10
	273872	115x22.23	ZA40-B	10
	273873	125x22.23	ZA60-B	10
	273874	125x22.23	ZA80-B	10
	273874	125x22.23	ZA80-B	10
	719793	125x22.23	ZA120-B	10
	34166866	178x22.23	ZA40-B	10
	34166867	178x22.23	ZA60-B	10
	34166869	178x22.23	ZA80-B	10
	34166870	178x22.23	ZA120-B	10
28A	34023527	100x16	ZA40-B	10
	34023528	100x16	ZA60-B	10
	34023529	100x16	ZA80-B	10
	34023530	100x16	ZA120-B	10
	320318	115x22.23	ZA40-B	10
	320320	115x22.23	ZA60-B	10
	320322	115x22.23	ZA80-B	10
	719794	115x22.23	ZA120-B	10
	320319	125x22.23	ZA40-B	10
	320321	125x22.23	ZA60-B	10
	320323	125x22.23	ZA80-B	10
	719796	125x22.23	ZA120-B	10
	34166901	178x22.23	ZA40-B	10
	34166902	178x22.23	ZA60-B	10
	34166903	178x22.23	ZA80-B	10
	34166904	178x22.23	ZA120-B	10
28N	246870	115x22.23	ZA40-B	10
	246871	115x22.23	ZA60-B	10
	246872	115x22.23	ZA80-B	10
	728649	115x22.23	ZA120-B	10
	728650	125x22.23	ZA40-B	10
	728657	125x22.23	ZA60-B	10
	728659	125x22.23	ZA80-B	10
	728661	125x22.23	ZA120-B	10
	34166905	178x22.23	ZA40-B	10
	34166906	178x22.23	ZA60-B	10
	34166907	178x22.23	ZA80-B	10
	34166908	178x22.23	ZA120-B	10

Final.indd 8 4/28/15 4:16 PM



MOUNTED FLAP WHEELS
FOR STEEL, STAINLESS STEEL AND NONFERROUS METALS

+ **High flexibility**
Greater precision is made possible as the flaps adjust flexibly to the contours of each workpiece.

+ **Universal use**
TYROLIT mounted flap wheels can be used on both pneumatic and electric machines for different materials.



+ **Less work required**
The grinding of small and difficult-to-reach areas, for example in container construction and apparatus engineering, is not a problem for TYROLIT mounted flap wheels.

These tools adapt optimally to every workpiece contour thanks to their flexibility. The radially arranged flaps of the mounted flap wheels can be used on various materials and permit precise work for different applications, such as matting, pre-polishing and the cleaning of surfaces. The highly flexible flaps also make light work of machining hard-to-reach areas.

BASIC★ MOUNTED FLAP WHEELS
For steel, stainless steel and nonferrous metals

The BASIC* mounted flap wheels adapt well to every workpiece contour thanks to their flexibility. The radially arranged flaps of the mounted flap wheels can be used on various materials and permit precise work for different applications, such as matting, pre-polishing and the cleaning of surfaces.

The highly flexible flaps also make light work of machining hard-to-reach areas.

	Shape	Type no.	Dimension	Grain	Max. RPM	Rec. speed	PU
	52LA-C	34054618	30x10 6x40	40	26,000	16,000	10
		34054619	30x10 6x40	60	26,000	16,000	10
		34054737	30x10 6x40	80	26,000	16,000	10
		34054660	30x10 6x40	120	26,000	16,000	10
		34054738	30x10 6x40	180	26,000	16,000	10
		34054739	40x15 6x40	40	20,000	13,000	10
		34054751	40x15 6x40	60	20,000	13,000	10
		34054753	40x15 6x40	80	20,000	13,000	10
		34054754	40x15 6x40	120	20,000	13,000	10
		34054758	40x15 6x40	180	20,000	13,000	10

Final.indd 9 4/28/15 4:17 PM



MOUNTED FLAP WHEELS

Shape	Type no.	Dimension	Grain	Max. RPM	Rec. speed	PU
	34054759	40x20 6x40	40	20,000	13,000	10
	34054760	40x20 6x40	60	20,000	13,000	10
	34054783	40x20 6x40	80	20,000	13,000	10
	34054784	40x20 6x40	120	20,000	13,000	10
	34054785	40x20 6x40	180	20,000	13,000	10
	34054786	50x15 6x40	40	16,000	11,000	10
	34054787	50x15 6x40	60	16,000	11,000	10
	34054788	50x15 6x40	80	16,000	11,000	10
	34054789	50x15 6x40	120	16,000	11,000	10
	34054801	50x20 6x40	40	16,000	11,000	10
	34054805	50x20 6x40	60	16,000	11,000	10
	34054809	50x20 6x40	80	16,000	11,000	10
	34054812	50x20 6x40	120	16,000	11,000	10
	34054813	50x20 6x40	180	16,000	11,000	10
	34054814	50x30 6x40	40	16,000	11,000	10
	34054817	50x30 6x40	60	16,000	11,000	10
	34054820	50x30 6x40	80	16,000	11,000	10
	34054831	50x30 6x40	120	16,000	11,000	10
	34054832	50x30 6x40	180	16,000	11,000	10
 	52LA-C 34054834	60x20 6x40	40	13,500	9,000	10
	34054836	60x20 6x40	60	13,500	9,000	10
	34054837	60x20 6x40	80	13,500	9,000	10
	34054839	60x20 6x40	120	13,500	9,000	10
	34054840	60x20 6x40	180	13,500	9,000	10
	34054852	60x30 6x40	40	13,500	9,000	10
	34054854	60x30 6x40	60	13,500	9,000	10
	34054855	60x30 6x40	80	13,500	9,000	10
	34054856	60x30 6x40	120	13,500	9,000	10
	34054857	60x30 6x40	180	13,500	9,000	10
	34054858	80x30 6x40	40	10,000	6,000	10
	34054860	80x30 6x40	60	10,000	6,000	10
	34054861	80x30 6x40	80	10,000	6,000	10
	34054862	80x30 6x40	120	10,000	6,000	10
	34054863	80x30 6x40	180	10,000	6,000	10

Final.indd 10 4/28/15 4:17 PM



SPINDLE-MOUNTED FLEECE FLAP WHEELS

Straight grinders are used when you need to work precisely in hard-to-reach locations. Especially when used in conjunction with TYROLIT spindle-mounted fleece flap wheels and mounted flap wheels, they are a flexible tool for producing optimum workpiece contours. The fan-shaped, abrasive grain flaps

The fan-shaped, abrasive grain flaps of the mounted flap wheels allow precise work on all surfaces. They can be used not only on electrical but also on pneumatic straight grinders. The TYROLIT assortment also includes a large number of spindle-mounted fleece flap wheels in different shapes and designs. They are highly adaptable and ensure that no changes occur to the surface integrity. Spindle-mounted fleece flap wheels are available with or without embedded abrasive.

PREMIUM★★★ FLEECE FLAP WHEELS SPINDLE MOUNTED

For steel, stainless steel and nonferrous metals


TYROLIT spindle-mounted fleece flap wheels are highly adaptable and ensure that no changes occur to the surface integrity. The TYROLIT Premium*** assortment has now been extended by 29 types in order to be able to offer you different grains and new dimensions.
Different surface structures and roughnesses can be achieved through the variety of grain gradings. TYROLIT spindle-mounted fleece flap wheels are also available with inlaid coated abrasive, so that higher stock removal can be achieved and a coarser surface integrity created.

	Shape	Type no.	Dimension	Grain	Design	Max. RPM	Rec. speed	PU
	 52 LA VL	570473	40x20 6x40		A COARSE	9,000	7,500	10
		908708	40x20 6x40		A MEDIUM	9,000	7,500	10
		908712	40x20 6x40		A FINE	9,000	7,500	10
		388126	40x20 6x40		A VERY FINE	9,000	7,500	10
		136087	50x30 6x40		A MEDIUM	8,000	6,000	10
		136090	50x30 6x40		A VERY FINE	8,000	6,000	10
		908854	50x50 6x40		A MEDIUM	8,000	6,000	10
		570485	60x30 6x40		A COARSE	7,000	5,000	10
		908784	60x30-6x40		A MEDIUM	7,000	5,000	10
		908794	60x30-6x40		A FINE	7,000	5,000	10
		908795	60x30-6x40		A VERY FINE	7,000	5,000	10
		34054620	60x50 6x40		A COARSE	7,000	5,000	10
		908710	60x50 6x40		A MEDIUM	7,000	5,000	10
		908715	60x50 6x40		A FINE	7,000	5,000	10
		34054651	60x50 6x40		A VERY FINE	7,000	5,000	10
		908862	80x50 6x40		A COARSE	6,000	4,000	10
		372339	80x50 6x40		C MEDIUM	6,000	4,000	10
		908711	80x50-6x40		A MEDIUM	6,000	4,000	10
		908717	80x50-6x40		A FINE	6,000	4,000	10
		908796	80x50-6x40		A VERY FINE	6,000	4,000	10

Final.indd 11 4/28/15 4:17 PM



SPINDLE-MOUNTED FLEECE FLAP WHEELS

	Shape	Type no.	Dimension	Grain	Design	Max. RPM	Rec. speed	PU
	 52LA VL-C	34053446	40x20 6x40	60	A COARSE	9,000	7,500	10
		908775	40x20 6x40	80	A MEDIUM	9,000	7,500	10
		908779	40x20 6x40	150	A FINE	9,000	7,500	10
		34053447	50x30 6x40	60	A COARSE	8,000	6,000	10
		136161	50x30 6x40	80	A MEDIUM	8,000	6,000	10
		457370	50x30 6x40	150	A FINE	8,000	6,000	10
		136164	50x30 6x40	240	A VERY FINE	8,000	6,000	10
	 52LA VL-C	148718	50x50 6x40	120	A MEDIUM	8,000	6,000	10
		148722	50x50 6x40	240	A VERY FINE	8,000	6,000	10
		263249	60x30 6x40	60	A COARSE	7,000	5,000	10
		910902	60x30-6x40	80	A MEDIUM	7,000	5,000	10
		908780	60x30 6x40	150	A FINE	7,000	5,000	10
		908821	60x30 6x40	240	A VERY FINE	7,000	5,000	10
		136168	60x40 6x40	80	A MEDIUM	7,000	5,000	10
		136173	60x40 6x40	240	A VERY FINE	7,000	5,000	10
		34054652	60x50 6x40	60	A COARSE	7,000	5,000	10
		34054655	60x50 6x40	80	A MEDIUM	7,000	5,000	10
		34054658	60x50 6x40	150	A FINE	7,000	5,000	10
		239448	80x30 6x40	240	A VERY FINE	6,000	4,000	10
		908871	80x50 6x40	60	A COARSE	6,000	4,000	10
		910864	80x50-6x40	80	A MEDIUM	6,000	4,000	10
		136193	80x50 6x40	120	A MEDIUM	6,000	4,000	10
		910853	80x50-6x40	150	A FINE	6,000	4,000	10
		908823	80x50-6x40	240	A VERY FINE	6,000	4,000	10
		908872	100x50 6x40	60	A COARSE	4,000	3,000	10
		910890	100x50 6x40	80	A MEDIUM	4,000	3,000	10
		908826	100x50 6x40	150	A FINE	4,000	3,000	10
		908825	100x50-6x40	240	A VERY FINE	4,000	3,000	10

Final.indd 12 4/28/15 4:17 PM



SHEETS

SHEETS
FOR HAND SANDING AND SUPERFINISHING

Any kind of surface finishing requires thorough preparation. This can be done by hand or using an orbital sander.


Wood, paint or lacquer are usually abraded by hand. Deburring work can also be accomplished by hand. However, for perfect intermediate sanding, we recommend using an orbital sander. This also allows smooth finishing of coatings and smoothing of composite materials. For jobs like these we offer abrasive sheets in a wide range of designs, such as cloth, paper and fleece rolls. They allow easy and flexible working on virtually any material.

PREMIUM★★★ A-P07 P C
PAPER SHEETS
For steel, nonferrous metals, wood, paints and lacquers



The special feature of the PREMIUM*** paper sheets is a latex-finished backing, which makes them ideal for wet and dry finishing. This is the perfect product for preparing and machining metal, wood, paint and lacquer.

The closed coating of the PREMIUM*** paper sheets delivers an excellent surface finish.



Shape	Type no.	Dimension	Grain	PU
■ Sheet	706001	230x280	60	50
	706002	230x280	80	50
	706003	230x280	100	50
	706004	230x280	120	50
	706005	230x280	150	50
	706006	230x280	180	50
	706007	230x280	220	50
	706008	230x280	240	50
	706009	230x280	320	50
	706010	230x280	400	50
	706011	230x280	600	50
	706012	230x280	800	50
	706013	230x280	1000	50
	706014	230x280	1200	50

Final.indd 13 4/28/15 4:17 PM





SHEETS

PREMIUM★★★ C-P68 P C | C-P68 P A PAPER SHEETS

For steel, nonferrous metals, wood, paints and lacquers

The paper sheets made of silicon carbide are the perfect product for preparing and machining metal, wood, paint and lacquer. The special feature of the PREMIUM*** sheets is a latex-finished backing, which makes them ideal for wet and dry finishing.

The closed coating of the PREMIUM*** paper sheets delivers an excellent surface finish.


	Shape		Type no.	Dimension	Grain	PU
	■	Sheet	724257	230x280	80	50
			724264	230x280	100	50
			724267	230x280	120	50
			724268	230x280	150	50
			724271	230x280	180	50
			724272	230x280	220	50
			724273	230x280	240	50
			724275	230x280	320	50
	■	Sheet	724276	230x280	400	50
			724281	230x280	600	50
			724283	230x280	800	50
			724284	230x280	1000	50
			724285	230x280	1200	50

BASIC★ A-B35 P C | A-B35 P A PAPER SHEETS

For paints, lacquers and wood

With a semi-open grain distribution on a lightweight paper backing, TYROLIT paper sheets are ideal for dry grinding. This enables use on different types of wood, paints and lacquers.

The semi-open coating of the BASIC* paper sheets prevents loading of the product and delivers an excellent surface finish.

	Shape		Type no.	Dimension	Grain	PU
	■	Sheet	706015	230x280	60	50
			706016	230x280	80	50
			706018	230x280	100	50
			706020	230x280	120	50
			706021	230x280	150	50
			706022	230x280	180	50
			706023	230x280	240	50

Final.indd 14 4/28/15 4:17 PM




BASIC★ A-B01 C JX CLOTH SHEETS

Universal use

With the flexible cloth sheets from TYROLIT you can machine almost any material. When finishing surfaces, preparation either by hand or using an orbital sander is required. When machining wood, paint and lacquer, TYROLIT recommends BASIC* cloth sheets.

However, our products can also be used for finishing coatings, or smoothing and cleaning composites.




Shape	Type no.	Dimension	Grain	PU
■ Sheet	705995	230x280	180	50
	705996	230x280	220	50
	705997	230x280	240	50
	705998	230x280	320	50
	705999	230x280	400	50
	706000	230x280	600	50

BASIC★ A-B01 C JJ CLOTH SHEETS

Universal use

With highly flexible cloth sheets from TYROLIT you can machine almost any material. When finishing surfaces, preparation either by hand or using an orbital sander is required. When machining wood, paint and lacquer, TYROLIT recommends the BASIC* cloth sheets.

However, our products can also be used for finishing coatings, or smoothing and cleaning composites.



Shape	Type no.	Dimension	Grain	PU
■ Sheet	20832	230x280	60	50
	20833	230x280	80	50
	20834	230x280	100	50
	20835	230x280	120	50
	20836	230x280	150	50
	20842	230x280	180	50
	20844	230x280	220	50
	20851	230x280	240	50
	20860	230x280	320	50
	20868	230x280	400	50

Final.indd 15 4/28/15 4:17 PM




SHEETS

PREMIUM★★★ FLEECE SHEETS AND ROLLS
UNIVERSAL USE

+ **Long lifetime**
  Thanks to 100% impregnation, the abrasive grain is not only located on the surface, but also inside the fleece


+ **Flexible use**
  The abrasive fabric adapts perfectly to any workpiece surface.

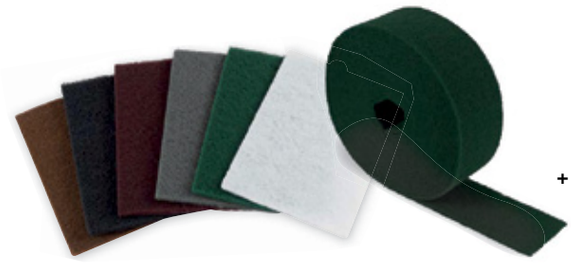

+ **Flexible use**
  The abrasive fabric adapts perfectly to any workpiece surface.

Our fleece sheets are used for cleaning and processing surfaces using orbital sanders or for hand-guided grinding. A wide range of specifications offer the user a variety of surface finish options.
The assortment extends from coarse specifications for cleaning weld seams through to ultra-fine and polishing fleece.

PREMIUM★★★ FLEECE SHEETS
Universal use

	Shape	Type no.	Dimension	Conforms to	Design	Colour	PU
	Sheet	120769	152x229	P150	A COARSE	BROWN	10
		120770	152x229	P220-240	A MEDIUM	RED-BROWN	10
		120772	152x229	P320	A FINE	RED-BROWN	10
		120774	152x229	P400-500	A VERY FINE	RED-BROWN	10
		120777	152x229	P220-240	S MEDIUM	BLACK	10
		120779	152x229	P800	C SUPERFINE	GREY	10
		120781	152x229	P400-500	A GP - GREEN	GREEN	10
		120787	152x229	–	POLISH	WHITE	10
	Roll	120653	100 x 10m	P150	A COARSE	BROWN	1
		120667	100 x 10m	P220-240	A MEDIUM	RED-BROWN	1
		120671	100 x 10m	P320	A FINE	RED-BROWN	1
		120674	100 x 10m	P400-500	A VERY FINE	RED-BROWN	1
		120676	100 x 10m	P800	C SUPERFINE	GREY	1
		120682	100 x 10m	P400-500	A GP - GREEN	GREEN	1
		120688	115 x 10m	P150	A COARSE	BROWN	1
		120689	115 x 10m	P220-240	A MEDIUM	RED-BROWN	1
		120693	115 x 10m	P320	A FINE	RED-BROWN	1
		120694	115 x 10m	P400-500	A VERY FINE	RED-BROWN	1
		120700	115 x 10m	P800	C SUPERFINE	GREY	1
		120716	115 x 10m	P400-500	A GP - GREEN	GREEN	1

Final.indd 16 4/28/15 4:17 PM



TYROLIT FAST CHANGE
FOR DUAL ACTION SANDERS

TYROLIT Fast Change discs offer a simple and convenient solution for surface treatment. Disc changes are quick and easy thanks to the Velcro fastening.

These tools are available with paper or film backings and can be used on nearly all materials. We offer discs with different numbers of holes for optimum material removal or extraction. They are easily applied to our back up pads.

The different grit sizes allow grinding from coarse to fine on ferrous and nonferrous metals and on wood, lacquers, paint and composites.

PREMIUM★★★ A-P22 FI TFC
For plastic, composites, gel coat and wood

TYROLIT FAST CHANGE enables you to change a disc very quickly thanks to the Velcro fastening. This durable and flexible product has been developed with a special film backing to achieve improved edge stability and stock removal rate.

The product delivers an exceptionally even finish on lacquers, paints and composites. Clogging and loading of the disc is reduced, thus increasing the product's lifetime.



Shape		Type no.	Diameter	Grain	Holes	Max. RPM	PU
	Disc 8H	706147	125	40	8	10,500	50
		706148	125	60	8	10,500	50
		706149	125	80	8	10,500	50
		706150	125	100	8	10,500	50
		706151	125	120	8	10,500	50
		706152	125	150	8	10,500	50
		706154	125	180	8	10,500	50
		706155	125	240	8	10,500	50
		706157	125	320	8	10,500	50
		706158	125	400	8	10,500	50

Final.indd 17 4/28/15 4:18 PM



TYROLIT FAST CHANGE

PREMIUM★★★ ZA-P45 V | ZA-P45 P F TFC

Universal use

TYROLIT FAST CHANGE enables you to change a disc very quickly thanks to the Velcro fastening. A unique, strong paper backing combined with zirconium makes this product extremely abrasive and durable, and active coolants enable cool, clean grinding to be performed on the workpiece.

Thanks to the thin fibre backing with grit 40 and strong paper backing the TFC is the optimal tool for removing smaller welding and spot weld seams.

	Shape		Type no.	Diameter	Grain	Holes	Max. RPM	PU
		Disc	706139	125	40	0	10,500	50
			706141	125	60	0	10,500	50
			706142	125	80	0	10,500	50
			706143	125	120	0	10,500	50
			706144	150	60	0	8,800	50
			706145	150	80	0	8,800	50
			706146	150	120	0	8,800	50

PREMIUM★★★ A-P21 P C | A-P21 P B TFC

For plastic, composites, gel coat and wood

TYROLIT FAST CHANGE enables you to change a disc very quickly thanks to the Velcro fastening. The thin paper backing makes the disc ideal for finishing various wood surfaces and for preparing paint, lacquer or wax surfaces.
The product delivers an exceptionally even finish on lacquers, paints and composites. Clogging and loading of the disc is reduced, thus increasing the product's lifetime.

	Shape		Type no.	Diameter	Grain	Holes	Max. RPM	PU
		Disc 8H	706219	125	40	8	10,500	50
			706221	125	60	8	10,500	50
			706222	125	80	8	10,500	50
			706223	125	100	8	10,500	50
			706224	125	120	8	10,500	50
			706225	125	150	8	10,500	50
			706226	125	180	8	10,500	50
			706227	125	240	8	10,500	50
			706228	125	320	8	10,500	50
			706229	125	400	8	10,500	50
		Disc	706244	150	40		8,800	50
			706245	150	60		8,800	50
			706246	150	80		8,800	50
			706248	150	120		8,800	50
			706250	150	180		8,800	50
			706251	150	240		8,800	50

Final.indd 18 4/28/15 4:18 PM



TYROLIT FAST CHANGE

PREMIUM★★★ A-P21 P C | A-P21 P B TFC

For plastic, composites, gel coat and wood

TYROLIT FAST CHANGE enables you to change a disc very quickly thanks to the Velcro fastening. The thin paper backing makes the disc ideal for finishing various wood surfaces and for preparing paint, lacquer or wax surfaces.
The product delivers an exceptionally even finish on lacquers, paints and composites. Clogging and loading of the disc is reduced, thus increasing the product's lifetime.



Shape		Type no.	Diameter	Grain	Holes	Max. RPM	PU
	Disc 7H	706255	150	40	7	8,800	50
		706258	150	60	7	8,800	50
		706259	150	80	7	8,800	50
		706260	150	100	7	8,800	50
		706261	150	120	7	8,800	50
		706262	150	150	7	8,800	50
		706264	150	180	7	8,800	50
		706265	150	240	7	8,800	50
		706266	150	320	7	8,800	50
		706267	150	400	7	8,800	50
	Disc 9H	706268	150	40	9	8,800	50
		706269	150	60	9	8,800	50
		706270	150	80	9	8,800	50
		706272	150	100	9	8,800	50
		706273	150	120	9	8,800	50
		706274	150	150	9	8,800	50
		706276	150	180	9	8,800	50
		706277	150	240	9	8,800	50
		706278	150	320	9	8,800	50
		706280	150	400	9	8,800	50

PREMIUM★★★ C-P65 P E TFC

For hard stone, steel, composites, plastics and soft stone.

TYROLIT FAST CHANGE enables you to change a disc very quickly thanks to the Velcro fastening. The thin paper backing makes the disc ideal for finishing tasks. The product delivers an exceptionally even finish on metals, lacquers, composites, marble and stone.
The product delivers an exceptionally even finish on hard stone, steel and composites. Clogging and loading of the disc is reduced, thus increasing the product's lifetime.



Shape		Type no.	Diameter	Grain	Holes	Max. RPM	PU
	Disc	6957	125	40	0	10,500	50
		6958	125	60	0	10,500	50
		6960	125	80	0	10,500	50
		6964	125	120	0	10,500	50

Final.indd 19 4/28/15 4:18 PM



TYROLIT FAST CHANGE



Shape	Type no.	Diameter	Grain	Holes	Max. RPM	PU
Disc	6968	125	180	0	10,500	50
	6969	125	220	0	10,500	50
	6979	125	320	0	10,500	50
	6991	125	400	0	10,500	50
	6993	125	600	0	10,500	50
	7007	125	800	0	10,500	50
	7008	180	40	0	7,300	50
	7030	180	60	0	7,300	50
	7055	180	80	0	7,300	50
	7058	180	120	0	7,300	50
	7070	180	180	0	7,300	50
	7072	180	220	0	7,300	50
	7086	180	320	0	7,300	50
	7087	180	400	0	7,300	50
	7093	180	600	0	7,300	50
	7100	180	800	0	7,300	50

PREMIUM★★★ ACCESSORIES

For TFC

Our back up pads can be used on most dual action sanders and their medium density provides the ideal support for finishing and preparing surfaces. The specially developed product design delivers outstanding dust extraction.

You can use practically any disc with our back up pads. They fit discs with 0, 6, 7, 9 and 15 holes.



Shape	Type no.	Diameter	Grain	Holes	Grade	Max. RPM	PU	Design
PAD TFC	710006	115	M14		HARD	13,300	5	
	710007	125	M14		HARD	12,300	5	
	710008	150	5/16-M8	23	HARD	10,500	1	Suitable for discs with 0, 6, 7, 9 and 15 holes
	710009	150	5/16-M8	23	MEDIUM	10,500	1	Suitable for discs with 0, 6, 7, 9 and 15 holes

Final.indd 20 4/28/15 4:18 PM



ROLLERS
FOR BURNISHING MACHINES

TYROLIT rollers are used on portable equipment such as burnishing machines for general grinding jobs, cleaning, finishing and for polishing uneven or curved surfaces.

Our products allow a consistent, high-quality surface finish throughout their lifetime. With our comprehensive assortment, we offer products for removing welding tracks, scratches or oxidation residues. These tools are especially popular for surface pre-treatment over large areas.

The patented shape of the newly developed spiral rollers means they are extremely easy and convenient to use without lateral deflection. You can also increase your productivity by avoiding typical roller imprinting on the workpiece. In addition, vibrations are considerably reduced and the load is minimised.

PREMIUM★★★ ROLLERS
For steel, stainless steel and nonferrous metals



PREMIUM*** rollers are used on burnishing machines for general grinding processes, cleaning, finishing and for polishing uneven or curved surfaces. As the wear pattern remains stable throughout the product lifetime, a consistent high-quality surface finish is delivered.
The comprehensive assortment offers products for removing welding tracks, scratches and oxidation residue, as well as for pre-treating surfaces.

	Shape	Type no.	Dimension	Grain	Design	Colour	Max. RPM	Rec. speed	PU
	 1LA C	62144	100x100x19.1 S4	40			6,800	3,700	1
		62153	100x100x19.1 S4	60			6,800	3,700	1
		62154	100x100x19.1 S4	80			6,800	3,700	1
		62155	100x100x19.1 S4	120			6,800	3,700	1
		62178	100x100x19.1 S4	180			6,800	3,700	1
	 1LA VL	60159	100x100x19.1 S4		A COARSE	RED-BROWN	6,800	2,400	1
		60170	100x100x19.1 S4		A MEDIUM	RED-BROWN	6,800	2,400	1
		60184	100x100x19.1 S4		A FINE	RED-BROWN	6,800	2,400	1
		60185	100x100x19.1 S4		A VERY FINE	RED-BROWN	6,800	2,400	1
	 1LA VL-C	60337	100x100x19.1 S4	60	A COARSE	RED-BROWN	6,800	2,400	1
		60351	100x100x19.1 S4	80	A MEDIUM	GREY	6,800	2,400	1
		60352	100x100x19.1 S4	120	A FINE	GREY	6,800	2,400	1
		60354	100x100x19.1 S4	180	A VERY FINE	GREY	6,800	2,400	1

Final.indd 21 4/28/15 4:18 PM




VULCANISED FIBRE DISCS
FOR STEEL AND STAINLESS STEEL

+ **Maximum abrasiveness**
Ceramic aluminium oxide delivers maximum removal rates and the longest lifetime.

+ **Longest lifetime**
An additional layer of active coolants increases the lifetime and reduces heat build-up while grinding is performed on different materials.

+ **Strong backing**
The 0.86 mm thick backing holds the grain in place, thus ensuring maximum abrasiveness.

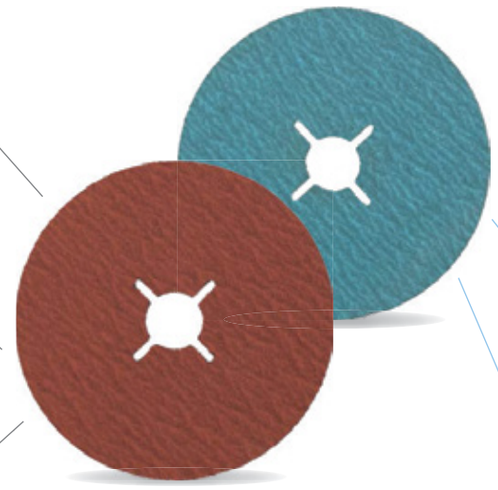

+ **Longest lifetime**
Resistant zirconium aluminium oxide and a coolant layer deliver maximum removal rates and the longest lifetime.

+ **Maximum economic efficiency**
Excellent priceperformance ratio

+ **Very good finish**
To achieve the best possible surface finish, the backing thickness has been optimised, particularly for fine grains.

Using fibre discs is a very simple and quick solution for removing material. A low level of vibration means the tools are convenient to use. This fibre disc has been designed for use on steel and stainless steel, and is made of a ceramic aluminium oxide mix.

This fibre disc is available from our assortment in grit sizes 36 to 120.

PREMIUM★★★ CA-P93 V VULCANISED FIBRE DISCS
For steel and stainless steel

	Shape		Type no.	Diameter	Grain	Max. RPM	PU
		V Disc	34163955	115x22	24	13,300	25
			706107	115x22	36	13,300	25
			34163957	115x22	40	13,300	25
			706108	115x22	60	13,300	25
			706109	115x22	80	13,300	25
			706110	115x22	120	13,300	25
			34163958	125x22	24	12,300	25
			706111	125x22	36	12,300	25
			34163959	125x22	40	12,300	25
			706114	125x22	60	12,300	25
			706116	125x22	80	12,300	25
			706117	125x22	120	12,300	25

Final.indd 22 4/28/15 4:18 PM



FIBRE DISC

PREMIUM★★★ CA-P93 V VULCANISED FIBRE DISCS

For steel and stainless steel



	Shape	Type no.	Diameter	Grain	Max. RPM	PU
	V Disc	34164002	180x22	24	8,600	25
		706119	180x22	36	8,600	25
		34164004	180x22	40	8,600	25
		706120	180x22	60	8,600	25
		706123	180x22	80	8,600	25
		706124	180x22	120	8,600	25
		34163992	115x22	24	13,300	50
		34163993	115x22	36	13,300	50
		34163994	115x22	40	13,300	50
		34163995	115x22	60	13,300	50
		34163997	115x22	80	13,300	50
		34163998	115x22	120	13,300	50
		34163999	125x22	24	12,300	50
		34164000	125x22	36	12,300	50
		34164011	125x22	40	12,300	50
		34164012	125x22	60	12,300	50
		34164013	125x22	80	12,300	50
		34164014	125x22	120	12,300	50
		34164015	180x22	24	8,600	50
		34164017	180x22	36	8,600	50
		34164018	180x22	40	8,600	50
		34164019	180x22	60	8,600	50
		34164020	180x22	80	8,600	50
		34164031	180x22	120	8,600	50

ACCESSORIES

For FIBRE DISCS



The BASIC* back up pad is a good supplement to all our fibre discs. The accessories offer good support in achieving the best results for the surface finish.

	Shape	Type no.	Diameter	Mounting	Grade	Max. RPM	PU
	PAD BASIC	709995	115x22	M14	HARD	13,300	5
		709997	125x22	M14	HARD	12,300	5
		709998	180X22	M14	HARD	8,600	5
		709999	115x22	5/8"	HARD	13,300	5
		710002	125x22	5/8"	HARD	12,300	5
		710005	180X22	5/8"	HARD	8,600	5

Final.indd 23 4/28/15 4:18 PM



FIBRE DISC

PREMIUM★★★ ZA-P48 V VULCANISED FIBRE DISCS

For steel and stainless steel

	Shape		Type no.	Diameter	Grain	Max. RPM	PU
		V Disc	34162979	115x22	24	13,300	25
			34162980	115x22	36	13,300	25
			34162981	115x22	40	13,300	25
			34162982	115x22	60	13,300	25
			34162983	115x22	80	13,300	25
			34162985	115x22	120	13,300	25
			34162987	125x22	24	12,300	25
			34162988	125x22	36	12,300	25
			34162989	125x22	40	12,300	25
			34162990	125x22	60	12,300	25
			34163011	125x22	80	12,300	25
			34163012	125x22	120	12,300	25
			34163013	180x22	24	8,600	25
			34163014	180x22	36	8,600	25
			34163015	180x22	40	8,600	25
			34163020	180x22	60	8,600	25
			34163021	180x22	80	8,600	25
			34163022	180x22	120	8,600	25
			34163024	115x22	24	13,300	50
			34163025	115x22	36	13,300	50
			34163026	115x22	40	13,300	50
			34163888	115x22	60	13,300	50
			34163889	115x22	80	13,300	50
			34163890	115x22	120	13,300	50
			34163902	125x22	24	12,300	50
			34163903	125x22	36	12,300	50
			34163905	125x22	40	12,300	50
			34163906	125x22	60	12,300	50
			34163908	125x22	80	12,300	50
			34163910	125x22	120	12,300	50
			34163911	180x22	24	8,600	50
			34163912	180x22	36	8,600	50
			34163913	180x22	40	8,600	50
			34163914	180x22	60	8,600	50
			34163915	180x22	80	8,600	50
			34163917	180x22	120	8,600	50

Final.indd 24 4/28/15 4:18 PM



FIBRE DISC

PREMIUM★★★ A-P02 V VULCANISED FIBRE DISCS

For steel and aluminium

Using fibre discs is a very simple and quick solution for removing material. A low level of vibration means the tools are convenient to use. This fibre disc has been designed for general use and is made of an aluminium oxide mix. It can be used for outstanding results on steel and nonferrous metals.

This fibre disc is available from our assortment in grit sizes 24 to 120.



Shape		Type no.	Diameter	Grain	Max. RPM	PU
	V Disc	706049	115x22	24	13,300	25
		706050	115x22	36	13,300	25
		706051	115x22	40	13,300	25
		706052	115x22	60	13,300	25
		706053	115x22	80	13,300	25
		706054	115x22	120	13,300	25
		706055	125x22	24	12,300	25
		706056	125x22	36	12,300	25
		706057	125x22	40	12,300	25
		706058	125x22	60	12,300	25
		706059	125x22	80	12,300	25
		706060	125x22	120	12,300	25
		706061	180x22	24	8,600	25
		706063	180x22	36	8,600	25
		706064	180x22	40	8,600	25
		706065	180x22	60	8,600	25
		706066	180x22	80	8,600	25
		706067	180x22	120	8,600	25

BASIC★ A-B02 V VULCANISED FIBRE DISCS

For steel, aluminium and wood

Using fibre discs is a very simple and quick solution for removing material. A low level of vibration means the tools are convenient to use. This fibre disc has been designed for universal use and is made of an aluminium oxide mix.

This fibre disc is available from our assortment in grit sizes 16 to 120.



Shape		Type no.	Diameter	Grain	Max. RPM	PU
	V Disc	150465	115x22	16	13,300	25
		706024	115x22	24	13,300	25
		706025	115x22	36	13,300	25
		706026	115x22	40	13,300	25
		706027	115x22	60	13,300	25

Final.indd 25 4/28/15 4:18 PM



FIBRE DISC

BASIC★ A-B02 V VULCANISED FIBRE DISCS
For steel, aluminium and wood

Using fibre discs is a very simple and quick solution for removing material. A low level of vibration means the tools are convenient to use. This fibre disc has been designed for universal use and is made of an aluminium oxide mix.

This fibre disc is available from our assortment in grit sizes 16 to 120.



Shape		Type no.	Diameter	Grain	Max. RPM	PU
	V Disc	706028	115x22	80	13,300	25
		150467	115x22	100	13,300	25
		706029	115x22	120	13,300	25
		150468	125x22	16	12,300	25
		706030	125x22	24	12,300	25
		706031	125x22	36	12,300	25
		706032	125x22	40	12,300	25
		706033	125x22	60	12,300	25
		706034	125x22	80	12,300	25
		150469	125x22	100	12,300	25
		706035	125x22	120	12,300	25
		150473	180x22	16	8,600	25
		706036	180x22	24	8,600	25
		706037	180x22	36	8,600	25
		706038	180x22	40	8,600	25
		706039	180x22	60	8,600	25
		706047	180x22	80	8,600	25
		706048	180x22	120	8,600	25

ACCESSORIES
For FIBRE DISCS

With our PREMIUM*** back up pads you will obtain the best support for the highest demands. Regardless of whether you choose a hard or very hard backing, you can influence the stock removal rate on the workpiece.

Thanks to the special design, you will benefit from constant air circulation, preventing heat build-up on the workpiece and the tool.



Shape		Type no.	Diameter	Mounting	Grade	Max. RPM	PU
	PAD INOX	709989	115x22	M14	VERY HARD	13,300	5
		709991	125x22	M14	VERY HARD	12,300	5
	PAD UNI	709992	115x22	M14	HARD	13,300	5
		709993	125x22	M14	HARD	12,300	5
		709994	180X22	M14	HARD	8,600	5

PREMIUM★★★ ACCESSORIES
For TYROLIT FAST CHANGE

The TFC back up pad has been developed to allow grinding wheels with Velcro fastenings to be used for grinding tougher materials and for finishing. The high-quality product design enables it to be used on different materials, including wood and paints.
The back up pad is characterised by easy handling and mounting on speed-controlled angle grinders.



Shape		Type no.	Diameter	Mounting	Grade	Max. RPM	PU
	PAD TFC	710006	115	M14	HARD	13,300	5
		710007	125	M14	HARD	12,300	5

Final.indd 26 4/28/15 4:19 PM

DIAMOND DRY-CUTTING CUT-OFF WHEELS

Applications

Cutting of: small-dimensioned building materials, hard stone or granite slabs, as well as tiles and ceramic panels or fine stone products

Consumer Groups

Building construction, road and garden construction; interior finishing, tilers, stonemasons

Quality

- Extremely short cutting times
- Suitable for various materials (from general building materials and hard stone right through to tiles)
- High cutting accuracy
- Little material loss, precise dimensioning
- Environmentally compatible (little dust, low energy requirement)

Application Tips

- Cutting-off work without a high contact force
- Easy pendulum movement (oscillating)
- Particularly suitable for achieving very clean, break-out-free, straight cutting edges and surfaces
- Less finishing required

MATERIALS, WORKPIECES


• Building materials


• Ceramics, tiles


• Hard stone, granite


• Abrasive materials


• Concrete


• Asphalt


• Soft stone

Final.indd 27 4/28/15 4:19 PM

DIAMOND DRY-CUTTING CUT-OFF WHEELS



BASIC



C3

Type No.	Shape	Dimensions	Segment height mm	Specification	Comments
633341	C3	105x2x22,23	7.000	DCU★	All round tool for cost-effective working
633342	C3	115x2x22,23	7.000	DCU★	
633346	C3	125x2x22,23	7.000	DCU★	
633350	C3	150x2,6x22,23	9.000	DCU★	
633353	C3	180x2,6x22,23	9.000	DCU★	
633354	C3	230x2,6x22,23	9.000	DCU★	



BASIC



C3R

Type No.	Shape	Dimensions	Segment height mm	Specification	Comments
633365	C3R	105x2x22,23	7.000	DCU★-FC	All round tool for cost-effective working
633369	C3R	115x2x22,23	7.000	DCU★-FC	
633374	C3R	125x2x22,23	7.000	DCU★-FC	
633375	C3R	150x2,4x22,23	9.000	DCU★-FC	
633381	C3R	180x2,4x22,23	9.000	DCU★-FC	
633382	C3R	230x2,4x22,23	9.000	DCU★-FC	



BASIC



C3

Type No.	Shape	Dimensions	Segment height mm	Specification	Comments
633314	C3	115x2x22,23	7.000	DCH★	All round tool for cost-effective working
633315	C3	125x2x22,23	7.000	DCH★	
633318	C3	180x2,6x22,23	9.000	DCH★	
633319	C3	230x2,6x22,23	9.000	DCH★	

Final.indd 28 4/28/15 4:19 PM



DIAMOND DRY-CUTTING CUT-OFF WHEELS



BASIC



C3W



Type No.	Shape	Dimensions	Segment height mm	Specification	Comments	
465672	C3W	115x2,2x22,23	7.000	DCB★	All round type for asphalt	
688600	C3W	125x2,2x22,23	7.000	DCB★		
465677	C3W	150x2,2x22,23	10.000	DCB★		
688602	C3W	230x2,4x22,23	10.000	DCB★		



BASIC



1A1R




Type No.	Shape	Dimensions	Segment height mm	Specification	Comments	
633323	1A1R	100x1,6x22,23	7.000	DCT★	Closed cutting edge for cleanest cuts without fragmented edges	
633326	1A1R	115x1,6x22,23	7.000	DCT★		
633330	1A1R	125x1,6x22,23	7.000	DCT★		
633336	1A1R	180x2x22,23	9.000	DCT★		
633339	1A1R	230x2x22,23	9.000	DCT★		



STANDARD★★ DIAMOND CUP WHEELS



STANDARD



STS-S



Type No.	Shape	Dimensions	Specification	PU	Comments
633296	STS-S-THS09	100x18x22,23	DGU★★	1	Professional tool with excellent value for money S = single row



STANDARD




STS-T



Type No.	Shape	Dimensions	Specification	PU	Comments
633295	STS-T-THS08	100x18x22,23	DGU★★	1	Professional tool with excellent value for money T = turbo
633302	STS-T-THS11	125x20x22,23	DGU★★	1	
633305	STS-T-THS14	180x32x22,23	DGU★★	1	



STANDARD



STS-D



Type No.	Shape	Dimensions	Specification	PU	Comments
633297	STS-D-THS10	100x18x22,23	DGU★★	1	Professional tool with excellent value for money D = double
633300	STS-D-THS19	110x18x22,23	DGU★★	1	
633304	STS-D-THS13	125x20x22,23	DGU★★	1	

Final.indd 30 4/28/15 4:19 PM

NOTES

Final.indd 31 4/28/15 4:19 PM

TYROLIT MIDDLE EAST FZE
P.O. Box 17842 | Jebel Ali Freezone | Dubai | UAE
Tel: +971 4 813 9111 | Fax: +971 4 813 9100
Email: infotme@tyrolit.com

Our **worldwide subsidiary companies** can be found on our website at **www.tyrolit.com**

Distributed By:

www.tyrolit.com

Final.indd 32 4/28/15 4:19 PM