



Double H Bridge L298N Connections

Arduino

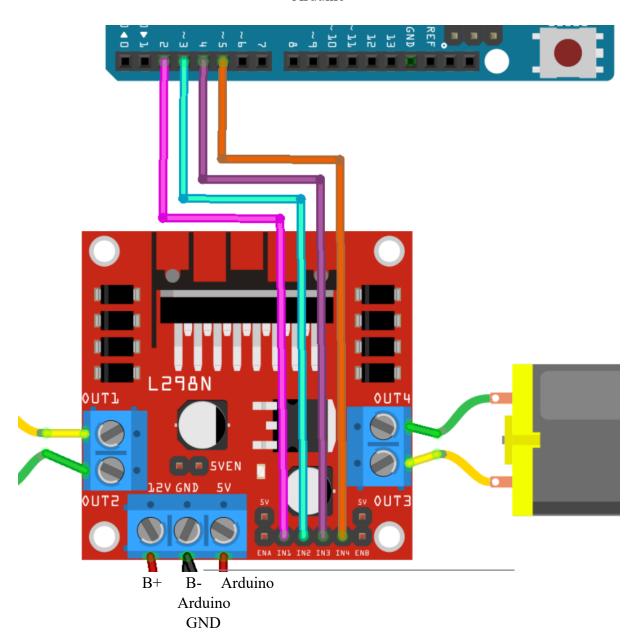

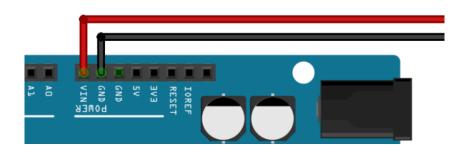

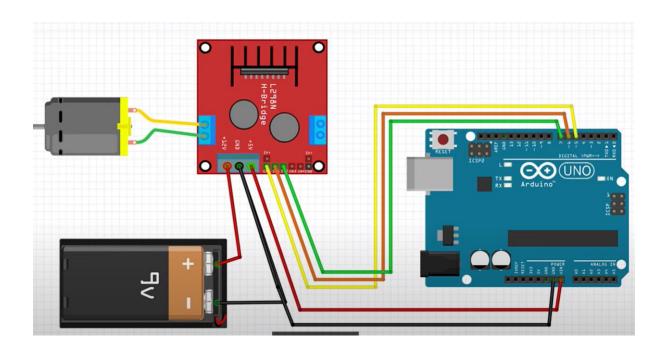

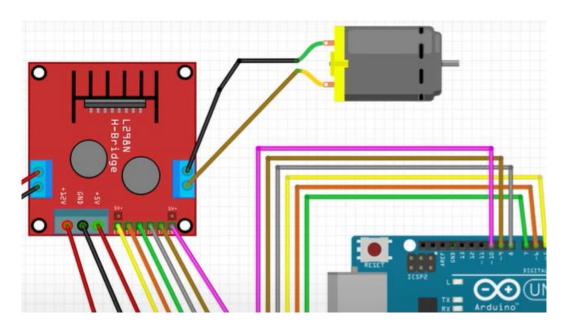

Features & Specifications

• Driver Model: L298N 2A

• Driver Chip: Double H Bridge L298N

• Motor Supply Voltage (Maximum): 46V

• Motor Supply Current (Maximum): 2A

• Logic Voltage: 5V

• Driver Voltage: 5-35V

• Driver Current:2A

• Logical Current:0-36mA

• Maximum Power (W): 25W

• Current Sense for each motor

• Heatsink for better performance

• Power-On LED indicator