


Charge Air Cooler Removal and Installation

Removal/Installation

NOTE:

- Where icon is shown, click for further information.
- Do not remove all parts. Only remove the ones applicable to the procedure you are working on.
- Unless otherwise indicated, illustrations used in the procedure are for USA and Canada models.


1

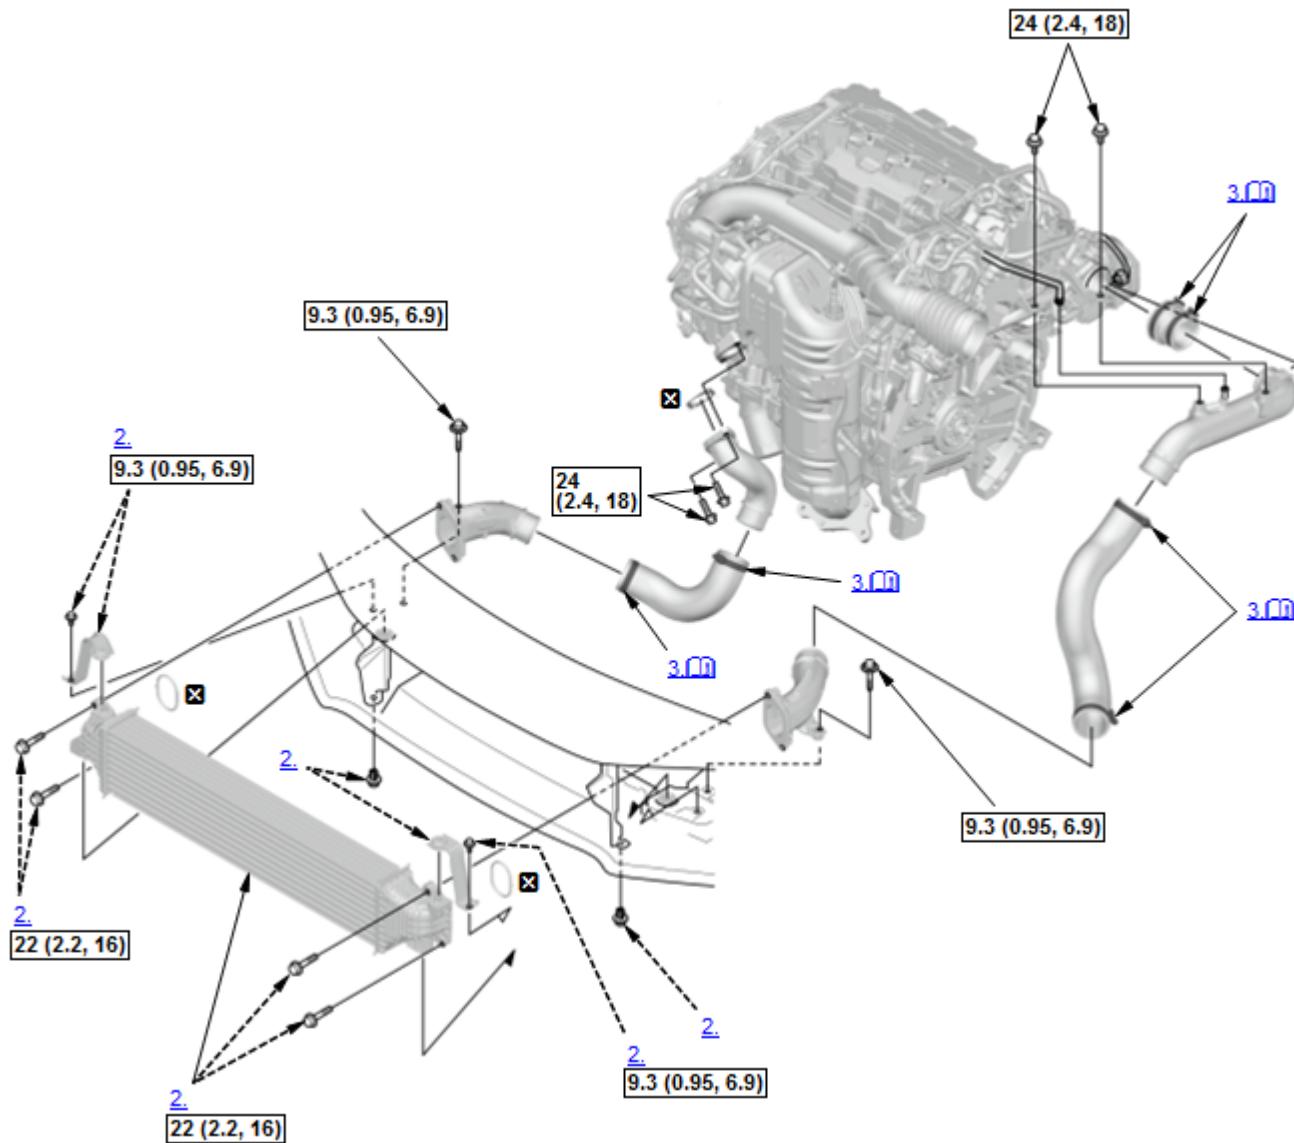

	Detailed information, notes, and precautions
	Torque: N·m (kgf·m, lbf·ft)
	Replace

1. Front Bumper - Remove**2. Charge Air Cooler - Remove****3. Hose Band - Precaution****Note for installation**

Align the end of hose band (A) with the center of mark (B) on the hose band.

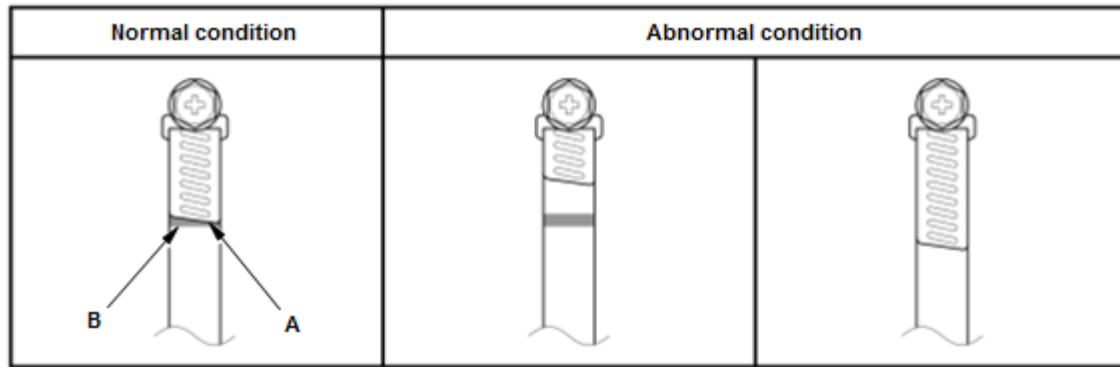**4. All Removed Parts - Install**

1. Install the parts in the reverse order of removal.