


(a) Spike-to-spike compression

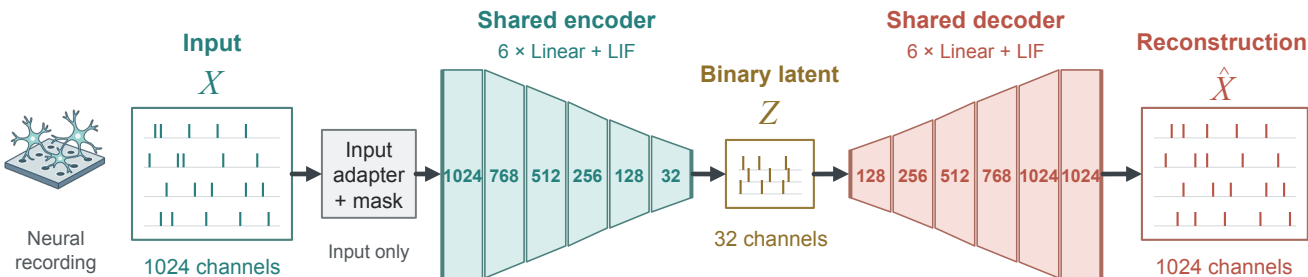


Encoder: 1024 → 1024 → 768 → 512 → 256 → 128 → 32

Decoder: 32 → 128 → 256 → 512 → 768 → 1024 → 1024

Time runs left to right and is preserved through the shared stages.

(b) Delay-tolerant training

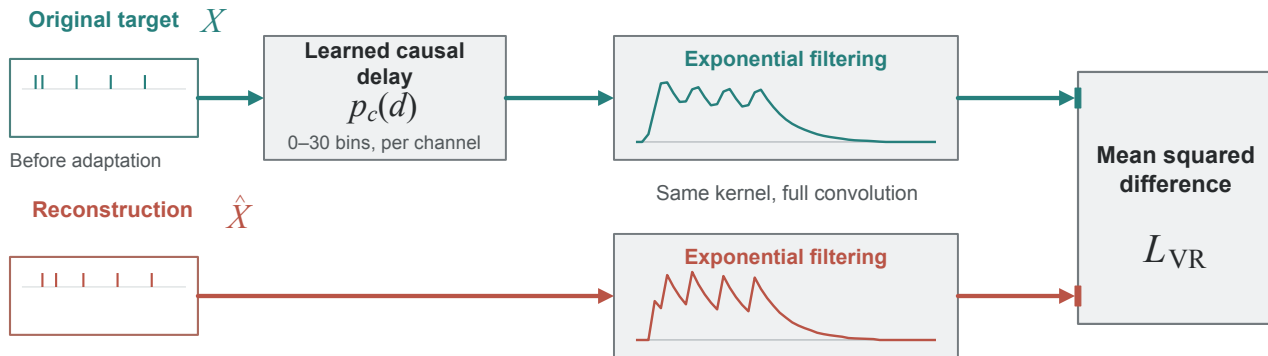

Illustrative causal delay

One event spreads to later bins



Schematic spikes and widths. Training input and target include 30 zero-tail bins.