












WIFI LoRa 32 Pinout Diagram

-  GND
-  Power
-  Control
-  Touch Pin
-  GPIO Port pin
-  Analog Pin
-  DAC
-  Serial SPI I2C
-  Physical Pin
-  On-board hardware Pin

Notes:

*GPIO input only
*ADC preamplifier
GPIOs are 3.3V tolerant only

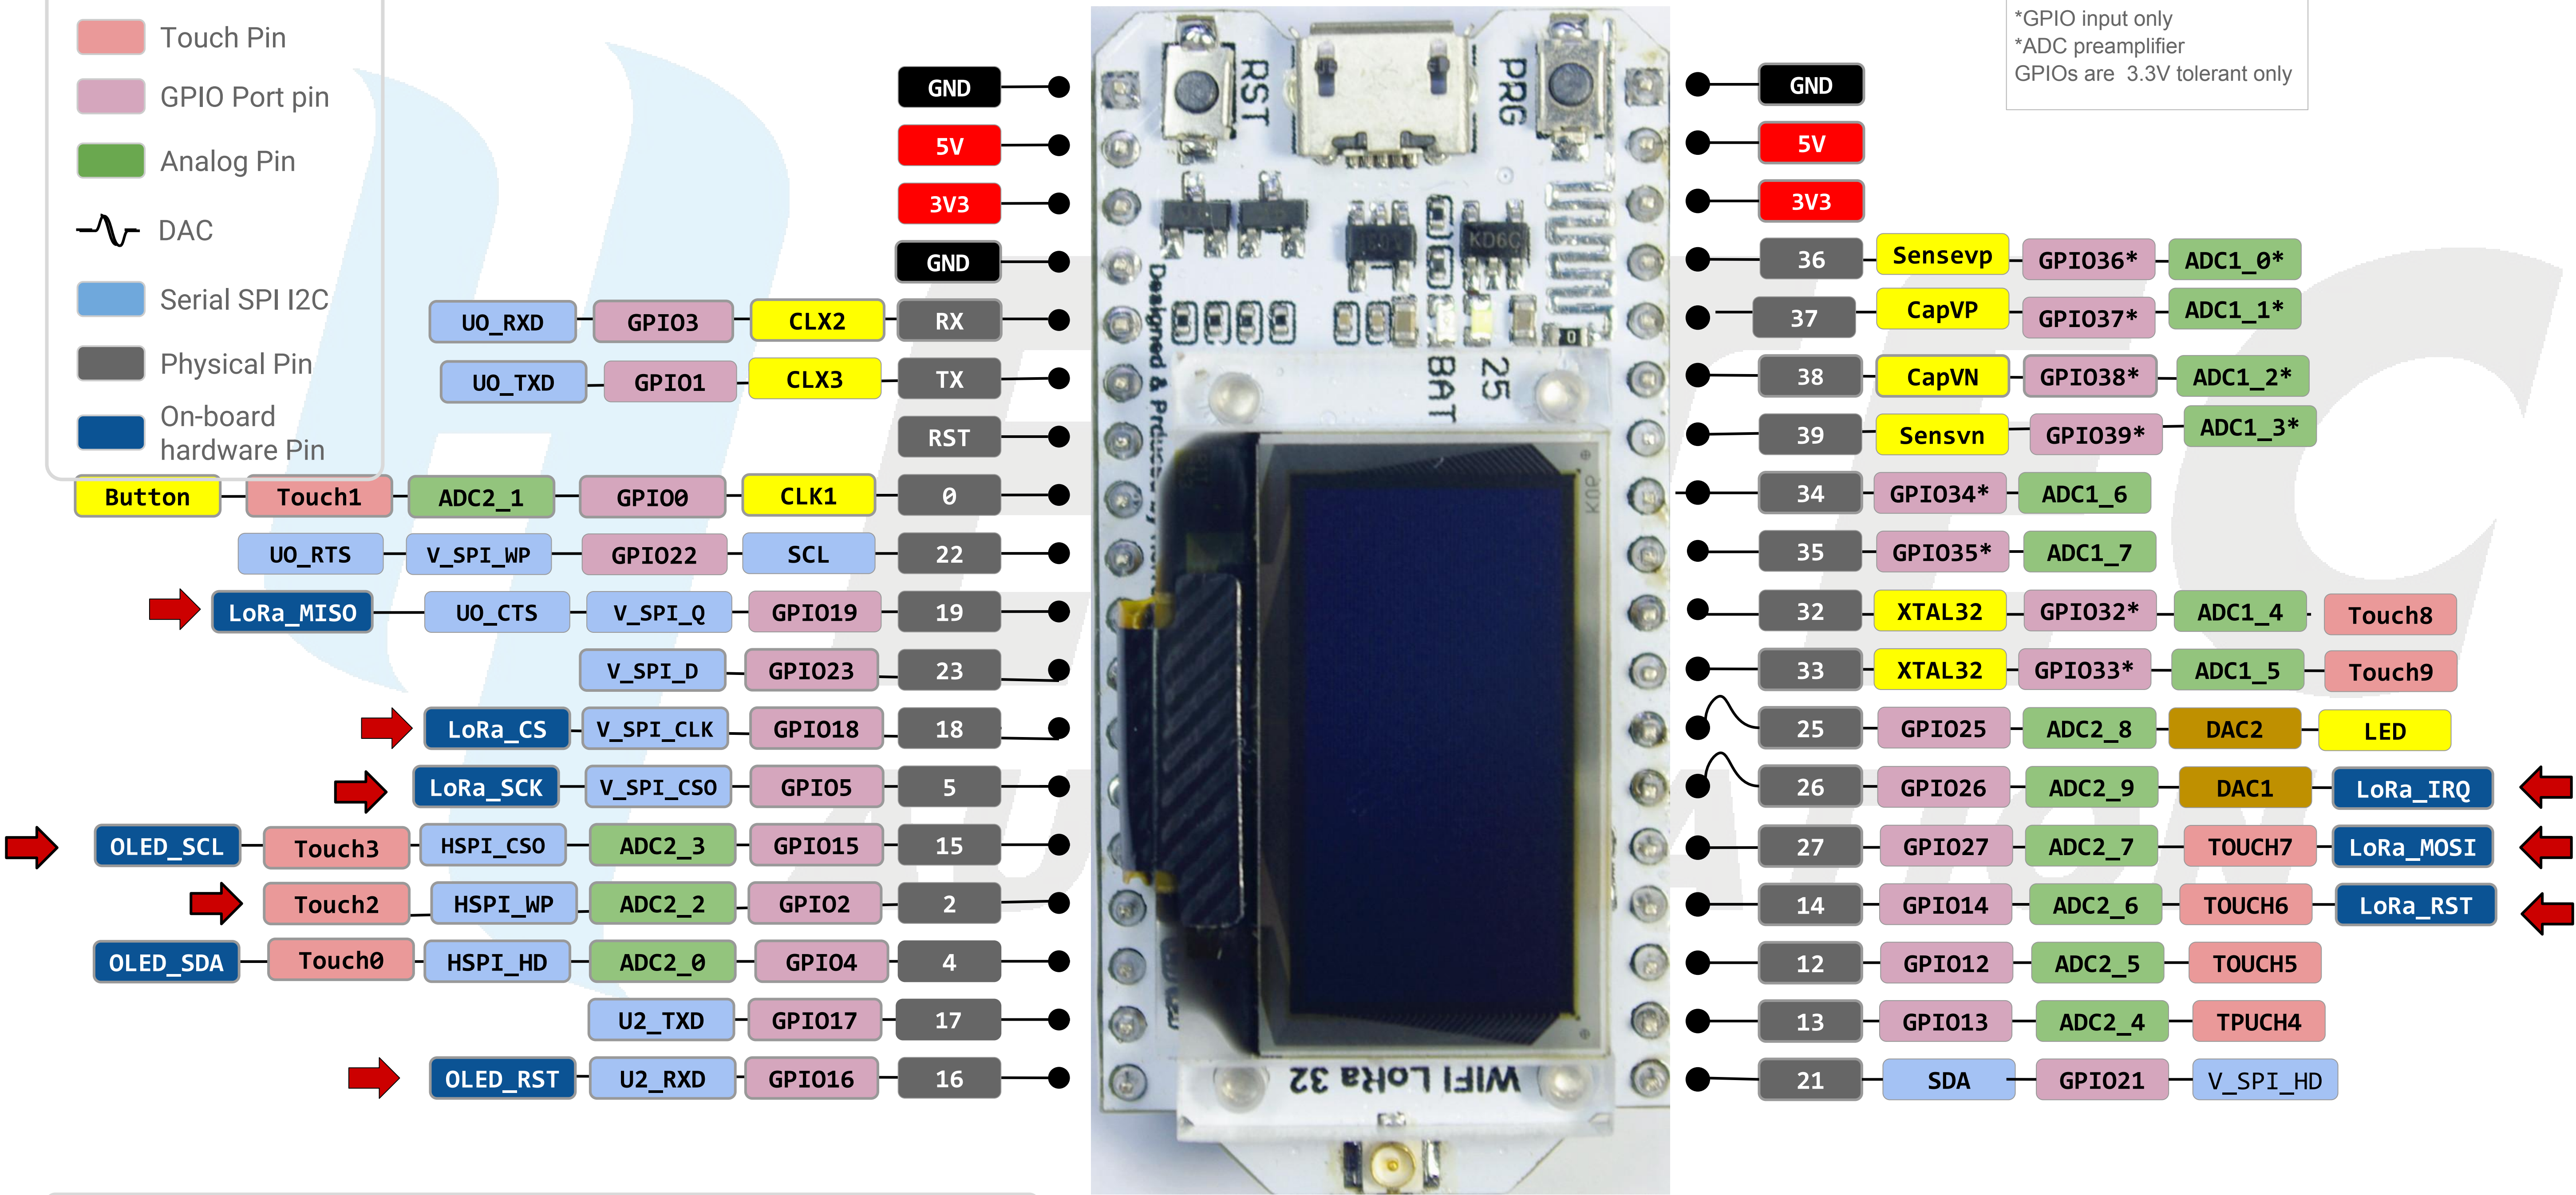

➡ Pins with this arrow are used by on-board OLED or LoRa, they must not be used for other purpose unless you know what you are doing!