Exp No: 11 Simulation of RIP using CISCO Packet tracer

1/10/26

Aim: To simulate Routing information Protocol (RIP) using CISCO Packet tracer and observe dynamic routing between different networks

IP Configuration:

Device	Interface	IP Configuration
PC0	Fast ethernet	10.0.0.218
Router 0	Fa0/1	10.0.0.118
Router 0	S0/0/1	192.168.1.254/30
Router 0	S0/0/0	192.168.1.249/30
Router 1	S0/0/0	192.168.1.250/30
Router 1	S0/0/1	192.168.1.246/30
Router 2	S0/0/1	192.168.1.245/30
Router 2	S0/0/1	192.168.1.253/30
Router 2	Fa0/1	20.0.0.1/30
PC 1	Fast ethernet	20.0.0.2/30

Procedure:

① Create the topology with 3 routers and 2 PC's

② Connect the routers using serial cables and connect PC's to the respective routers

③ Assign IP address to all PC's and routers interface

④ Enable the route interface


⑤ configure the remaining interface recording to the given IP table


⑥ Enable RIP on Router 0 and Configure RIP on Router 1 and 2


⑦ From PC0, use Ping 20.0.0.2 to verify connectivity

⑧ Use tracert to observe the route token by packets

⑨ Disconnect the direct Router 0 - Router 2 link and observe the RIP routers the traffic through Router1

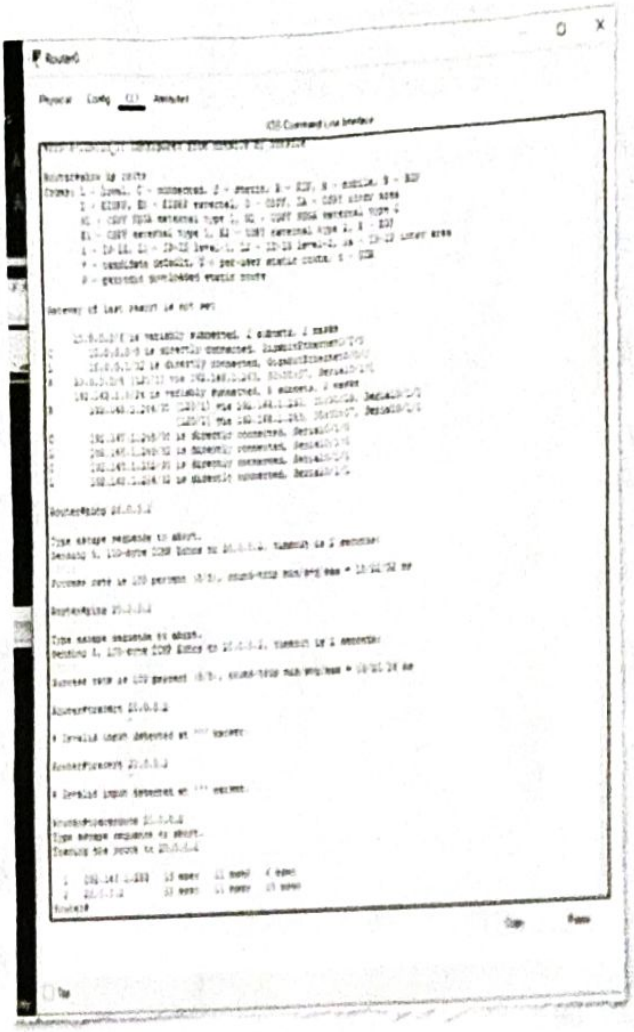
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface

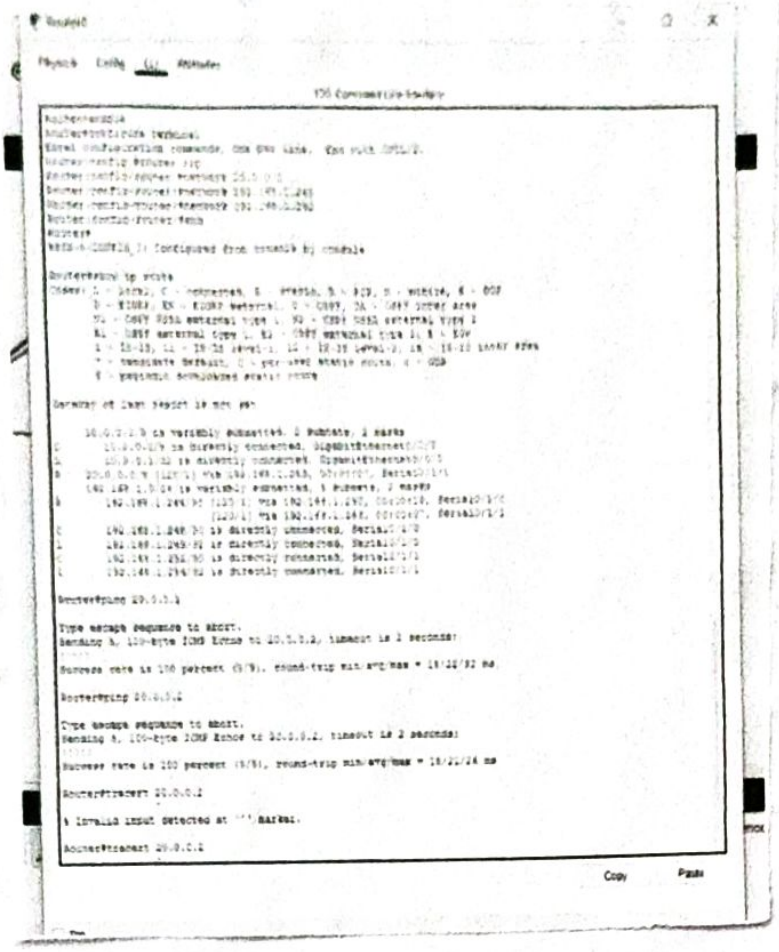

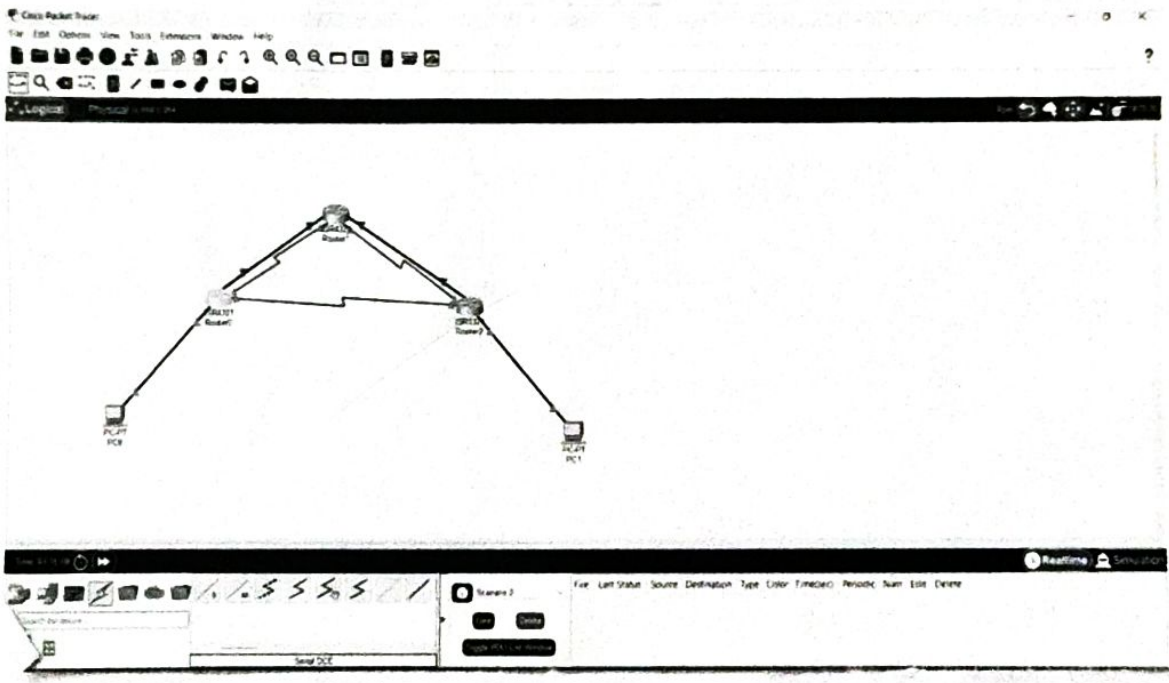

Result: Simulation of RIP using Cisco packet tracer for a network is implemented successfully.