Expt No: 03 Date: 30/07/26	Experiments on CISCO Packet Tracker (simulation Tool)

Aim:

To study the Packet tracer tool Installation and user Interface Overview

User Interface overview:

The layout of Packet Tracer is divided into several Components. The Components of the Packet Tracker interface are as follows: match the numbering with explanations

Analyse the behaviour of network devices using CISCO PACKET TRACER Simulator

1) From the network Component box, click and drag-and drop the below Components:

   a) 4 Generic PC's and one HUB

   b) 4 Generic PC's and one Switch

2) Click on Connections:

   a) Click on Copper straight-Through Cable,

   b) Select one of the PC and Connect it to HUB using the Cable. The link LED should glow in green, indicating that the link is up. Similarly Connect remaining 3 PC's to the HUB.

   c) Similarly Connect 4 PCs to the switch using Copper Straight-throught Cable.

3) Click on the PCs Connected to hub, go to the Desktop tab, click on IP Configuration, and enter an IP address and Subnet mask. Here, the default gateway and DNS server information is not needed as there are only two end devices in the network


Click on the PDU (message icon) from the common tool bar,


a) Drag and drop it on one of PC (Source machine) and then drop it on another PC (destination machine) connected to the HUB


4) Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation

5) Repeat step # 3 to step # 5 for PC's connected to the switch

6) Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviours of switch and HUB.

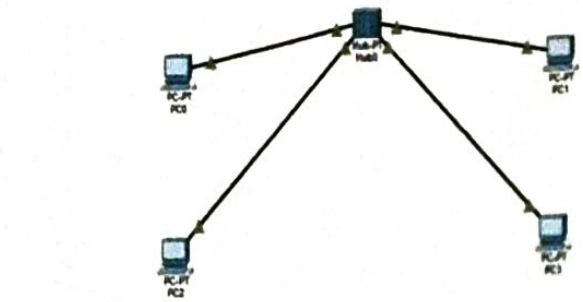



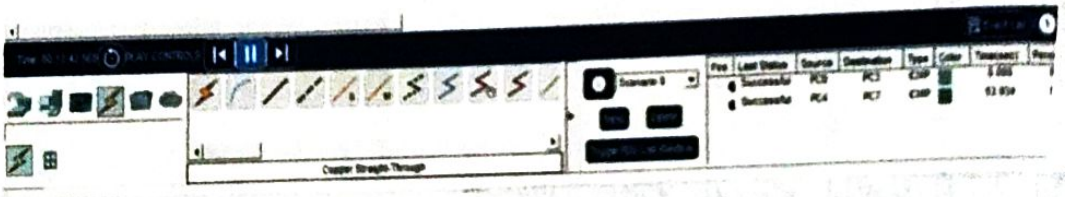

Result:

Experiment on CISCO Packet Transfer is successfully executed and the output is verified