

Technical overview LoRaWAN network



Professor: Dr.Mehdi Rasti

Lecturer: Jaber Babaki

Amirkabir University of Technology
Spring 2021

HELLO!

I AM JABER BABAKI

You can find me at:

Email: jaber.babaki@gmail.com

GitHub: <https://github.com/JaberBabaki>

Linkedin: <https://www.linkedin.com/in/jaber-babaki-9b5474102/>

Telegram: @jaberALU



Agenda

-
- 1- Big concept
 - ❖ IoT definition
 - ❖ IoT architecture
 - ❖ Technical research challenges
 - 2- Communication technologies
 - ❖ Defination Communication technologies
 - ❖ Long Range criteria
 - ❖ Compare Long Rage technologies
 - 3- LoRaWAN Network
 - ❖ Protocol stack
 - ❖ LoRaWAN architrcture
 - ❖ End to End communication
 - 4- CSS modulation
 - ❖ Chrip signal
 - ❖ Spread factor
 - ❖ Symbol rate
 - 5- RF Factor
 - ❖ Link budget
 - ❖ Receiving sensitivity
 - ❖ SNR
 - ❖ Maximum daily packets on LoRaWAN
 - 6- ALOHA
 - ❖ Defination ALOHA
 - ❖ Analysis ALOHA
 - 7- LoRaWAN performance
 - ❖ Maximum throughput
 - ❖ Maximum Number



1

BIG CONCEPT


Let's start with big concept about "Internet of Thing" and "Long Range Wide Area Network"



Introduction

- ◆ The Internet of Things (IoT) is an extension of the Internet in which large numbers of “things”, including sensors, actuators and processors, in addition to human users, are networked and able to provide high resolution data on their environment and exercise a degree of control over it[1].
- ◆ The principal advantage of IoT consists of its ability to enable communication between an infinite amount of machines incorporated into a large-scale wireless network[1].
- ◆ These automated devices and sensors together produce and transmit information in real-time, which is useless in the case of incorrect or insufficient filtering and data processing[1].

Introduction

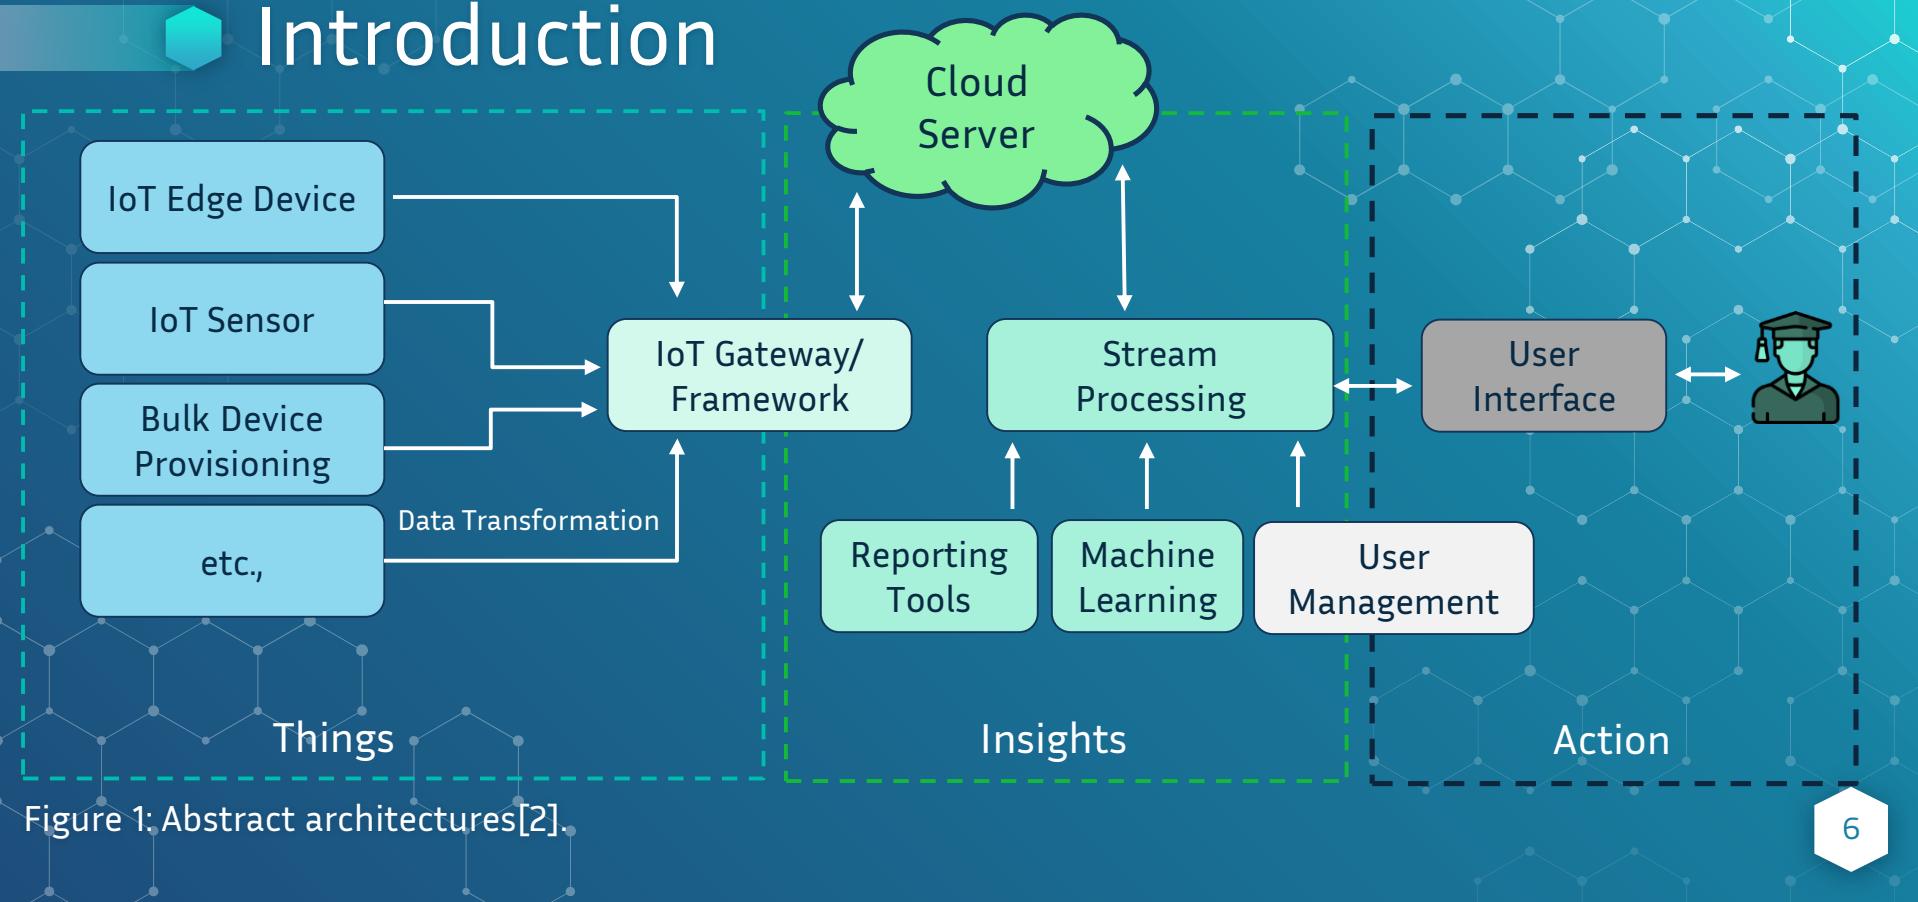



Introduction

- ◆ Many of these are technical, including interoperability and scalability
- ◆ How to invest in the IoT is a challenge for business
- ◆ Major social, legal and ethical challenges, including security and privacy
- ◆ As the future IoT will be a multi-national, multi-industry, multi-technology infrastructure

[1] Peter J. Ryan 1 and Richard B. Watson, "Research Challenges for the Internet of Things: What Role Can OR Play?", systems journal, 14 March 2017.



The main IoT technical research challenges

- ◆ **Design**
 - Architecture
 - Interoperability
 - Scalability
 - Mobility
 - Security and Privacy
- ◆ **Scientific/Engineering**
 - Energy efficiency/ Power
 - Reliability /Robustness
- ◆ **Management/ Operation**
 - Software
 - Development
 - Availability
 - Data management
 - Cloud computing

[1] Peter J. Ryan 1 and Richard B. Watson, "Research Challenges for the Internet of Things: What Role Can OR Play?", systems journal, 14 March 2017 .



2

Communication technologies



Communication and transport technologies

- ◆ An essential requirement for implementing a large and cooperating network of devices is the ability to have a flexible, inexpensive and adaptive connectivity layer.
- ◆ For these reasons, during the years, several wireless connectivity standards have emerged, ranging from very short-range, low power connections to long-range connectivity solutions based on cellular technologies.
- ◆ While short-range protocols can be successfully used for a number of applications (e.g., smart homes, wearable, etc.), for many other applications larger coverage radii become mandatory.



Communication and transport technologies

- ◆ We expect that in 2024 more than the 40% of the wide area M2M connections will be LPWAN. That is why several companies are developing different protocols to implement the LPWAN technology.





Communication and transport technologies

- ◆ To compare the protocols we keep in mind some of the most important characteristics of the LPWAN and some others important features like:
- ◆ **Range:** We all know that the range of any wireless technology can vary based on what is in the way of the signal. A dense urban setting, with walls, buildings, reflections, lots of other people and traffic, means much shorter range than a rural one. And a at, unobstructed rural setting will behave better than a hilly one.
- ◆ **Band and spectrum:** As we have explained there are protocols that use the free ISM band and others that use licensed spectrum. We can see also differences into the spectrum use, there are some protocols that use Ultra Narrow Band, some are Narrow Band, and some others like LoRa uses Spread Spectrum (Chirp Spread Spectrum).



Communication and transport technologies

- ◆ **Data Rate:** This is another highly variable parameter, it can depend on the distance to the receptor, the obstructions...
- ◆ **Over-the-air updates:** This may sound like a random characteristic, but it can be important depending on the application and the deployment of the end-devices. When the number of end-devices is high or the devices are placed on a remote place, we will get great advantages of this feature.
- ◆ **Handover:** IoT has an extensive application fields, we will find applications where the end-devices will be static units, in other cases they will be mobile (vehicles in urban or rural areas, for farm implementations for example). So it is natural to wonder whether a protocol that can handle the hand-off a device as it moves between hubs, this matters only to the extent that a "session" of some sort is being maintained.



Communication and transport technologies

	LoRa	SIGFOX	Telensa	ingenu
Range [km]	3-8 urban 15-20 suburban	3-10 urban 30-50 suburban	Up to 8	4
Band	Sub-GHz	Sub-GHz	Sub-GHz	2.4 GHz
Modulation	Spread Spectrum	Ultra-Narrow Band	Ultra-Narrow Band	Spread Spectrum
Data Rate [kbps]	0.3-22	0.1-0.6	low	20
OTA upgrades	Yes	No	Yes	Yes
Handover	No	Yes	Yes	Yes

Table 1: A Comparison of LPWAN Technologies [3].

3

LoRaWAN Network



LoRaWAN network

- The LoRaWAN network is formed by two core components: LoRa and LoRaWAN, each of which refers to a layer in the protocol stack. LoRa is a physical layer modulation developed by Semtech. LoRaWAN is implemented on top of the LoRa and includes data link and network layers [4].

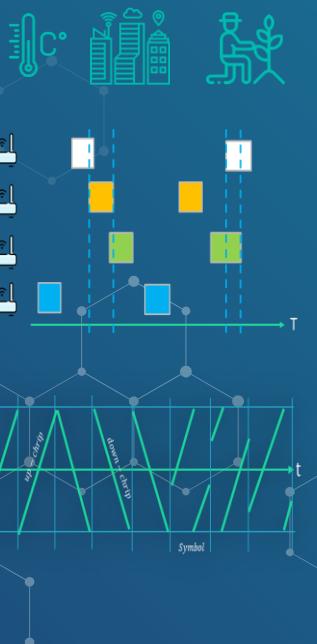


Figure 2: protocol stack.



LoRaWAN network

- ◆ As seen in this figure, the nodes send data to the platform through the gateways. Note that the nodes are not assigned to a specific gateway. Rather, all the gateways in the transmission range of a node receive its data and send it to the platform.


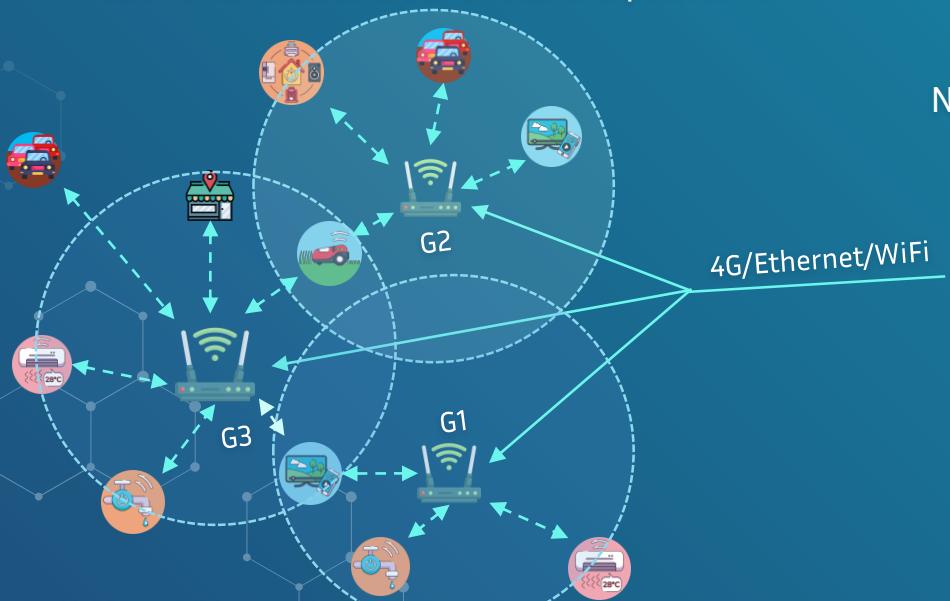


Figure 3: LoRaWAN architecture.

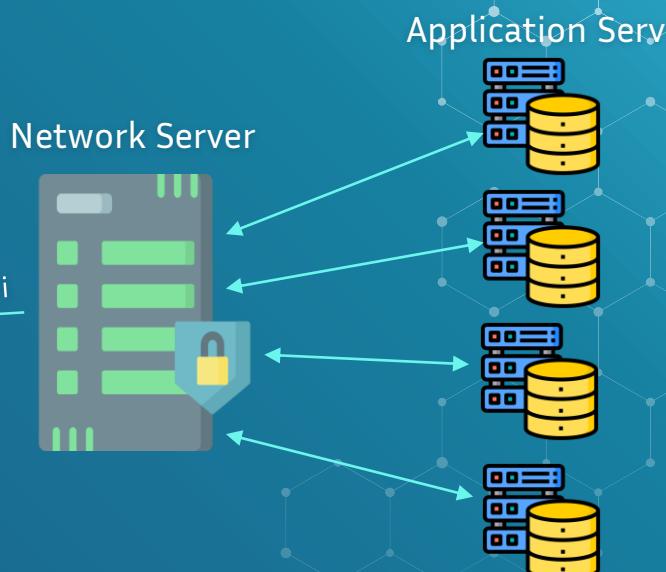

LoRaWAN network

- The gateways are connected to the network server via standard IP connections and act as a transparent bridge, simply converting RF packets to IP packets and vice versa.

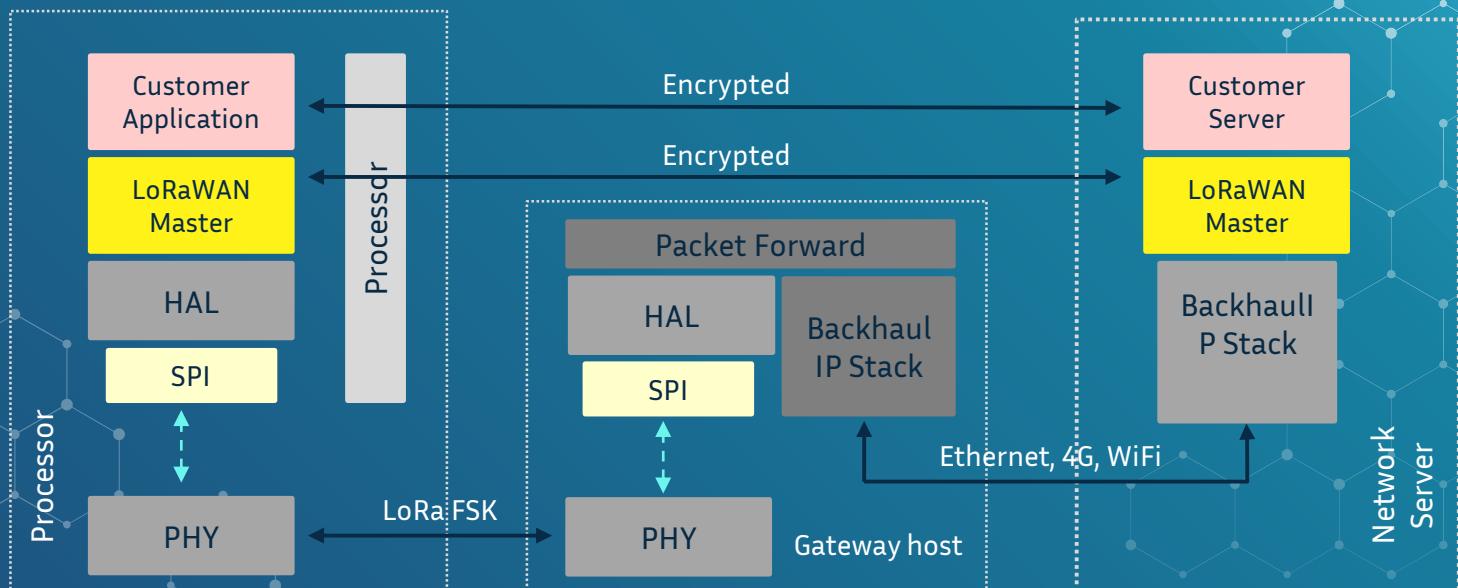


Figure 4: End-to-End communication[5].



4

CSS as a modulation for Long Range




Technical overview CSS as a modulation for Long Range Communication

- ◆ Long range low power is a family of technologies promising to connect thousands of sensors to the future internet of things. Within this family of possible technology choices, two different branches have emerged
 - ◆ Spread wideband communication
 - ◆ Narrowband communication



Technical overview CSS as a modulation for Long Range Communication

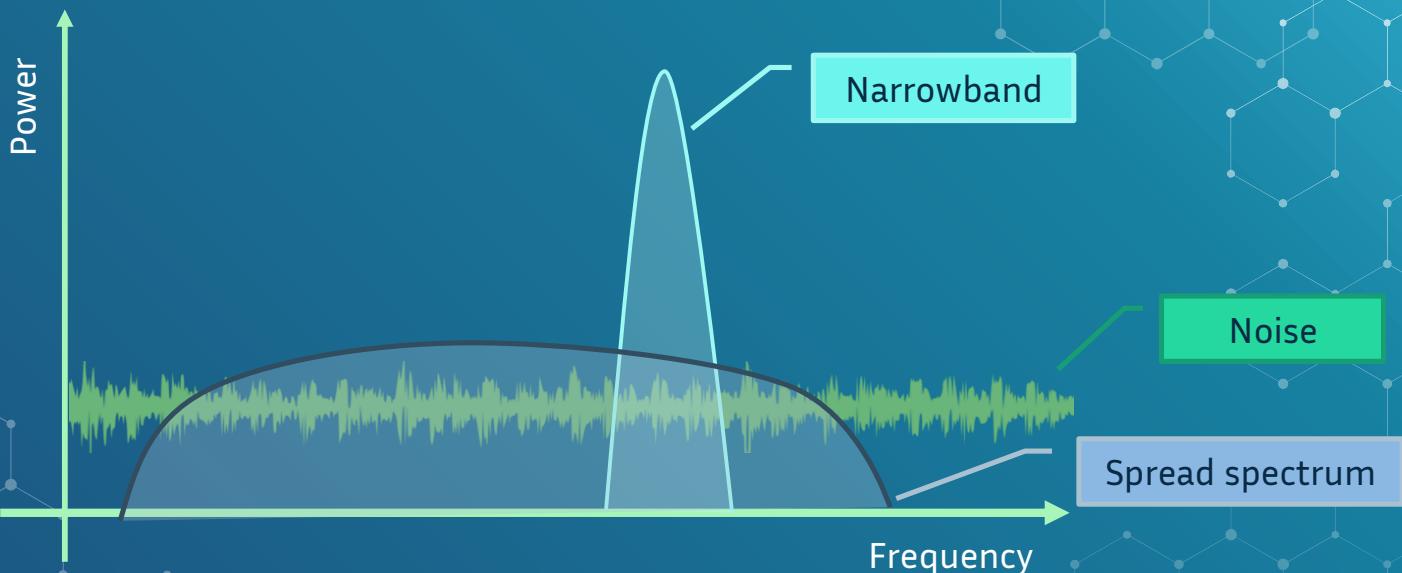





[6] V. Talla, M. Hessar, B. Kellogg, A. Najafi, J. R. Smith, S. Gollakota, "LoRa Backscatter: Enabling The Vision of Ubiquitous Connectivity", Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies, 2017/9/11.

Technical overview CSS as a modulation for Long Range Communication

- Band of signals occupy a **narrow/wide** range of frequencies
- Power density **is high/very low**(max power SigFox and LoRa equal 20dBm).
- Frequency-hopping spread spectrum (FHSS)
- Direct-sequence spread spectrum (DSSS)
- Time-hopping spread spectrum (THSS)
- Chirp spread spectrum (**CSS**)




Technical overview CSS as a modulation for Long Range Communication

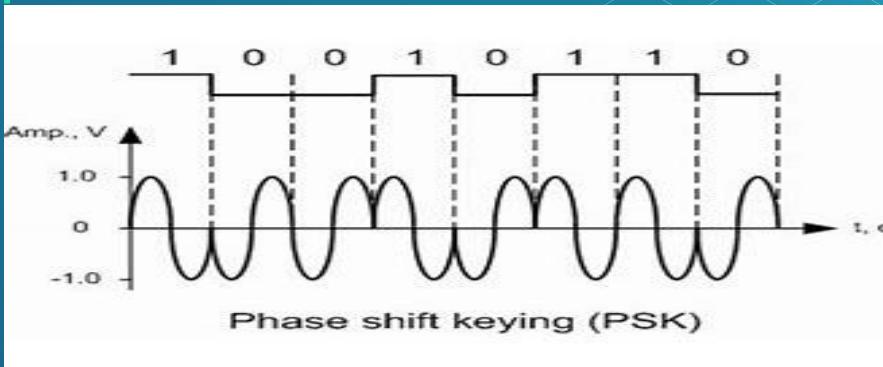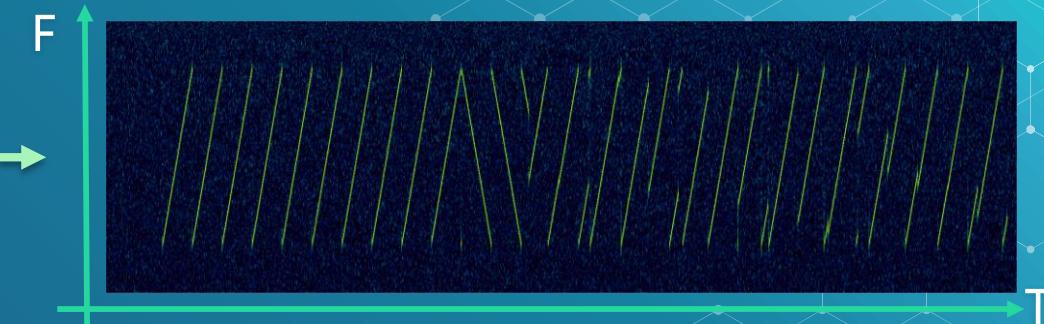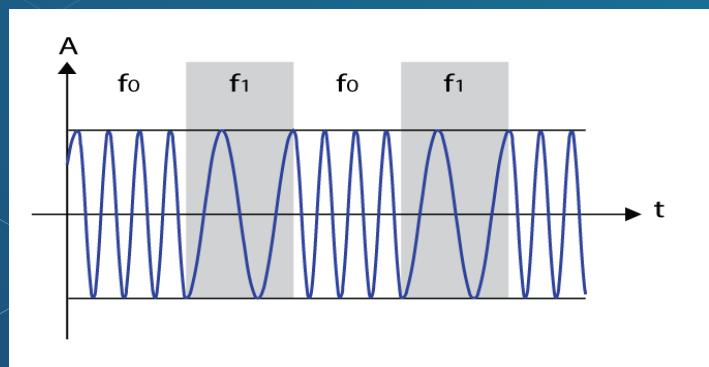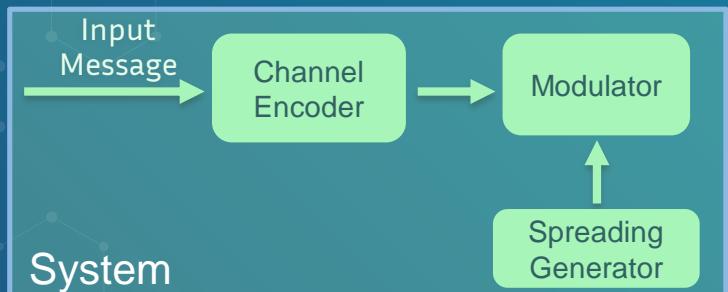



Technical overview CSS as a modulation for Long Range Communication

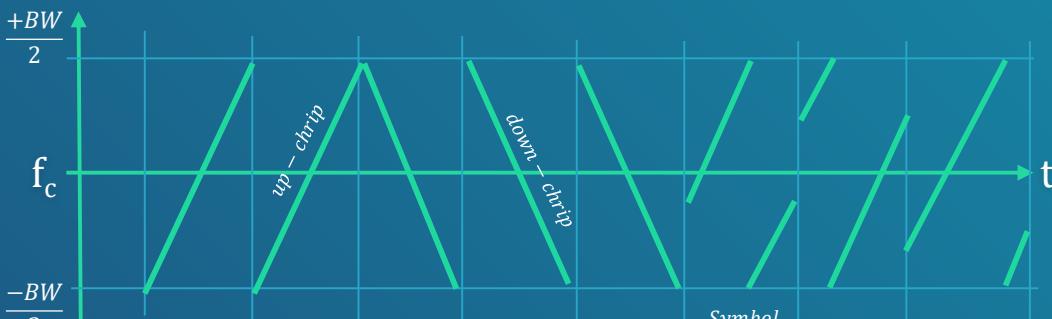

[6] V. Talla, M. Hessar, B. Kellogg, A. Najafi, J. R. Smith, S. Gollakota, "LoRa Backscatter: Enabling The Vision of Ubiquitous Connectivity", Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies, 2017/9/11.




Technical overview CSS as a modulation for Long Range Communication



The spreading factor, SF, is the number of bits encoded in each chirp duration...

$$SF = 2$$

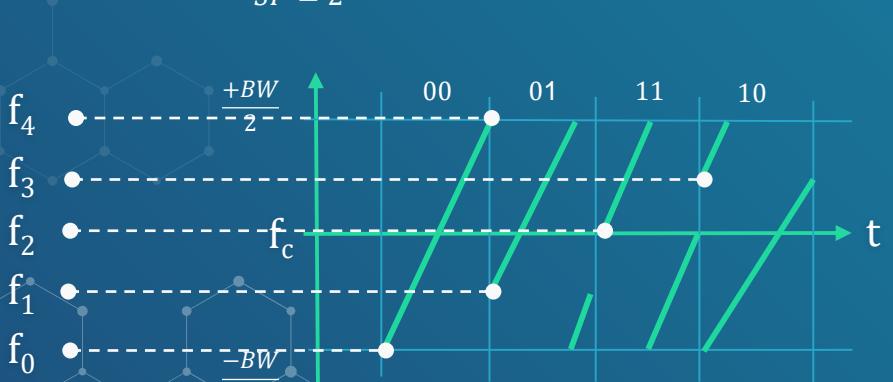

$$SF = 2$$

$$N = 2^2 \text{ sample}$$

$$\text{chrip symbol} = \log_2 4$$

$$\text{frequencies} = f_0 \dots f_3$$

$$SF = s$$

$$N = 2^s \text{ sample}$$


$$\text{chrip symbol} = \log_2 N$$

$$\text{frequencies} = 2^s$$



Technical overview CSS as a modulation for Long Range Communication

$SF = 7 \quad BW = 125kHz$

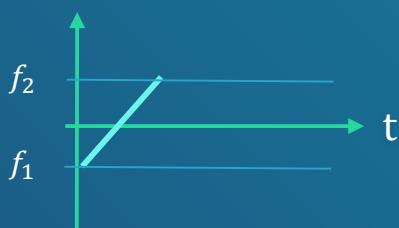


$SF = s$

$N = 2^s \quad \text{sample}$

chrip symbol = $\log_2 N$

frequencies = 2^s

$SF = 8 \quad BW = 125kHz$

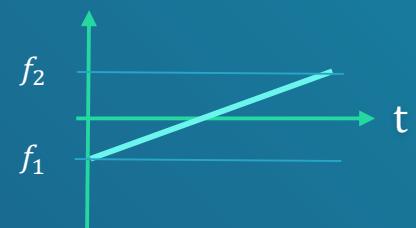

$$\text{symbol time}(s) = \frac{2^s}{BW}$$

$$\text{symbol rate}(s) = \frac{BW}{2^s}$$

$$\text{bit rate}(s) = \frac{BW}{2^s} SF$$

$SF = 8 \quad BW = 125kHz$



CR?

energy consumption?

$$PSS = \text{symbol time} \times E_s$$



5

Factors determine RF range



What factors determine RF range and performance?

- ❖ **Link budget** : The link budget is the difference between the strength of the transmitted signal and the minimum required signal at the receiver



$$\text{Link budget} = \text{TransmitPower}(P_t) - \text{Receiver Sensitivity}(S_r)$$



For a typical LoRa radio: $P_t = 13 \text{ dBm}, S_r = -137 \text{ dBm}$

$$\text{Link budget} = 13 - (-137) = 150 \text{ dBm}$$



What factors determine RF range and performance?

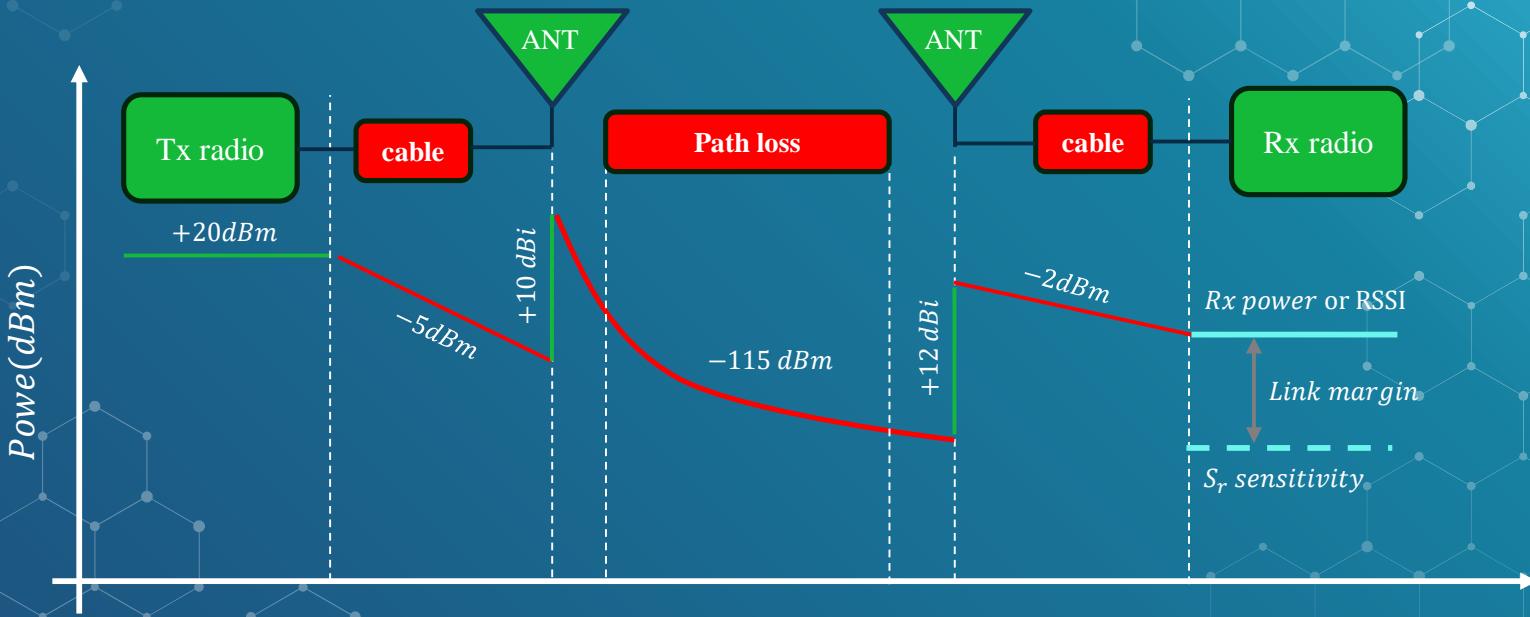


Figure 5: Example link budget calculation [8].



What factors determine RF range and performance?

- ❖ **Receiving sensitivity:** refers to the smallest modulated signal that can be demodulated at the receiving end.

$$\text{Receiving sensitivity} = \text{NF} + \text{SNR}$$


$$NF = -174 + \underbrace{\text{NF}}_{\text{Thermal noise for a 1 Hz bandwidth}} + 10 \log BW$$

Noise figure



What factors determine RF range and performance?

- ❖ **Receiving sensitivity:** refers to the smallest modulated signal that can be demodulated at the receiving end.

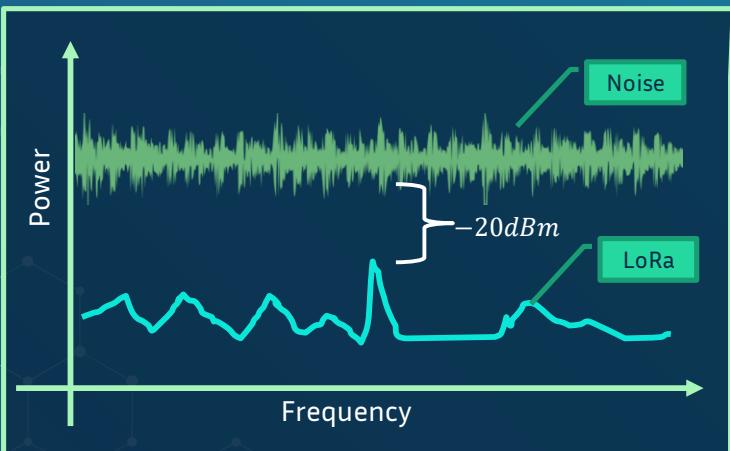

❖ Receiving sensitivity: refers to the smallest modulated signal that can be demodulated at the receiving end.

- $Tx\ power = 14\ dBm$
- $BW = 125\ KHz = 10\log_{10}(125000) = 51$
- $NF = 6\ dBm$
- $SNR = -20\ dBm (for\ SF=12)$
- Rx sensitivity = $-174 + 51 + 6 - 20 = -137\ dBm$
- Link budget = $-137dB - 14dB = -151dB$



What factors determine RF range and performance?

- ❖ **Receiving sensitivity:** refers to the smallest modulated signal that can be demodulated at the receiving end.
SNR is key measure in wireless network.
- In LoRa network SNR include Noise, SF, BW, TP, CR, Interference



What factors determine RF range and performance?

- ❖ **Signal-to-Noise Ratio (SNR)** : is the ratio between the received power signal and the noise floor power level.

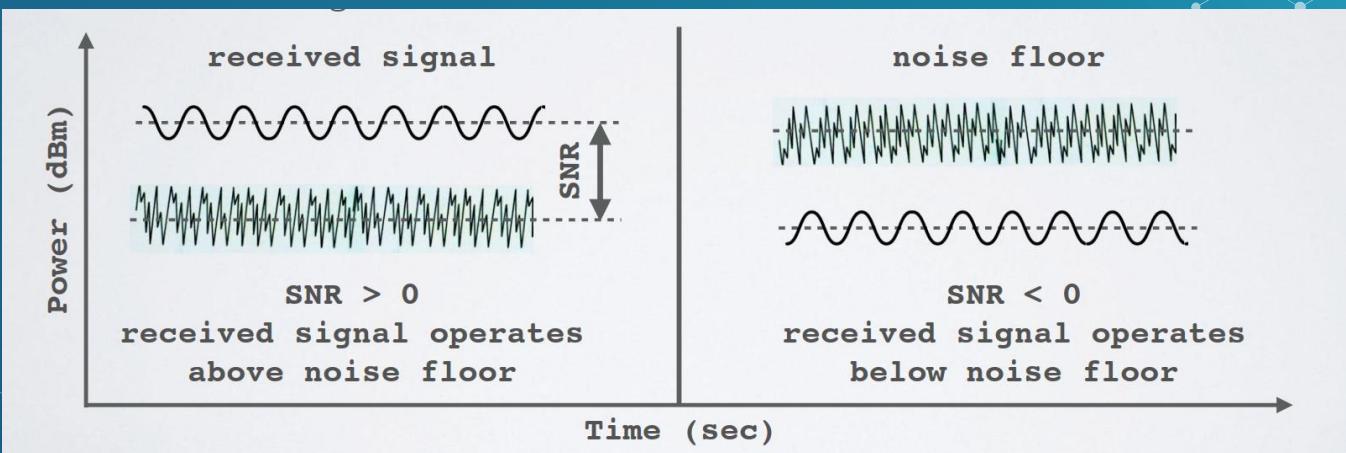


Figure 6: Signal-to-Noise Ratio (SNR) [8].



What factors determine RF range and performance?

Accurate calculation of SNR:

$$SNR = \frac{P_s}{P_w} \quad P_s = \text{The average power of } s(t) \\ P_w = B \cdot N_0$$

Calculate minimum SNR in terms of SF:

$$SNR_0 = \frac{E_{bit}}{NF} \quad E_{bit} = S_r \times T_{bit} \\ T_{bit} = \frac{1}{BW} \times 2^{SF} \quad \left. \right\} \quad SNR_0 = \frac{S_r \times 2^{SF}}{NF \times BW}$$
$$S_r = \frac{SNR_0 \times NF \times BW}{2^{SF}} \quad \left. \right\} \quad SNR(SF) = \frac{SNR_0}{2^{SF}}$$
$$S_r = BW \times NF \times SNR(SF)$$



What factors determine RF range and performance?

- Typical values of SNR of LoRa are: -20dB and +10dB.
- LoRa can demodulate signals below -7.5dB ~ -20dB below the floor noise.

Maximum daily packets on LoRaWAN

❖ Duration of the packet transmission

$$T_{on_the_air} = (N_{payload} + N_{preamble}) \times T_{symbol}$$

$$T_{symbol} = \frac{2^{SF}}{BW}$$

$$N_{payload} = 8 + \max \left[\text{Ceil} \left(\frac{8PL - 4SF + 28 + 16 - 20IH}{SF - 2DE} \times \frac{CR + 4}{4}, 0 \right) \right]$$

$$N_{preamble} = 8$$

[10] E. Ruano, LoRaTM protocol Evaluations, limitations and practical test, May 11, 2016

Description	
SF	Spreading Factor
PL	Payload Length
CRC	The use of the Cyclic Redundancy Check (CRC, 1 when enabled 0 when not)
IH	The use of explicit header or not (IH, 1 when enabled 0 when not)
CR	Coding Rate
DE	The Low Data Rate Optimization (DE, 1 when used 0 when not).



Maximum daily packets on LoRaWAN

- ❖ The time that the LoRa Mote has to wait before send the next packet is called T_{off} .

$$T_{off} = T_{on_the_air} - (T_{on_the_air} \times DCycle)$$

- ❖ So we can calculate the maximum daily packets

$$\text{Daily packets} = \frac{\text{Seconds in a day}}{T_{off}}$$



Maximum daily packets on LoRaWAN

- we can calculate theoretical $T_{on-the-air}$ and maximum number of daily packets with variable payload, 8 symbols of preamble, CRC activated with a value of 4/5, Implicit Header deactivated, bandwidth of 125 kHz and Low Data Rate optimization activated for high spreading factors (SF11 and SF12).

	16B	32B	51B
7	60ms	90ms	110ms
8			
9			
10			
11			
12	161ms	213ms	276ms

Table 2: Theoretical Ton-the-air and maximum number of daily packets [10].

	16B	32B	51B
7	13061	9657	7394
8			
9			
10			
11			
12	540	408	316



What factors determine RF range and performance?

SF	125 (kHz)		250 (kHz)		500 (kHz)		ToA (ms)	Range (Km)	SNR (dBm)
	Sensitivity (dBm)	ToA (ms)	Sensitivity (dBm)	ToA (ms)	Bit rate (kb/s)	Sensitivity (dBm)			
7	5.4	-124	56	110	-122	20	219	-116	10
8									
9									
10									
11									
12	0.29	-137	1483	0.5	-135	495	0.98	-129	247

❖ Code rate: 4/5

Payload:10 byte



What factors determine RF range and performance?



انجام شبیه سازی با پایتون و پر کردن جدول و کشیدن نمودار بر حسب سایز پکت ارسالی

6

ALOHA protocol



ALOHA protocol

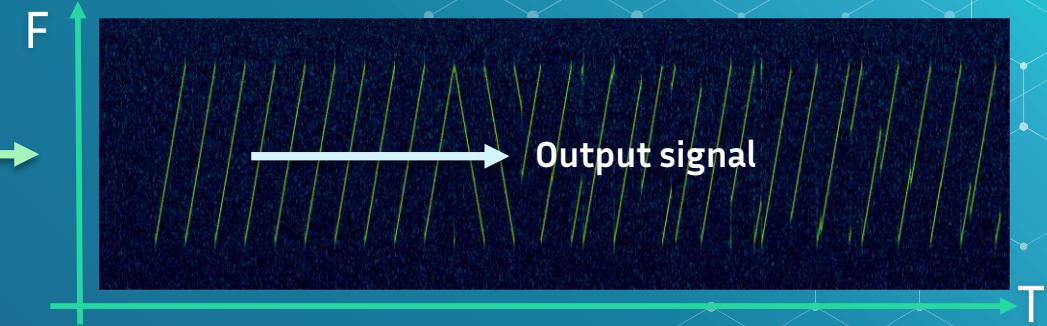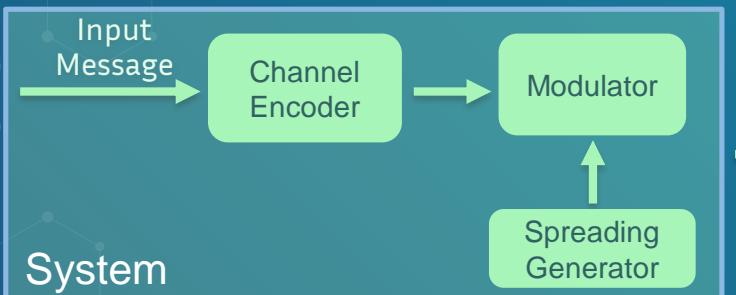



ALOHA protocol



Designated frequency

Channel

Designated frequency

Channel

Designated frequency

Channel

Output signal


Output signal

Output signal



ALOHA protocol

- TDMA creates channels by assigning users nonoverlapping time slots. In a system with N users, each user can thus use the total bandwidth W , but only a fraction $1/N$ of the time

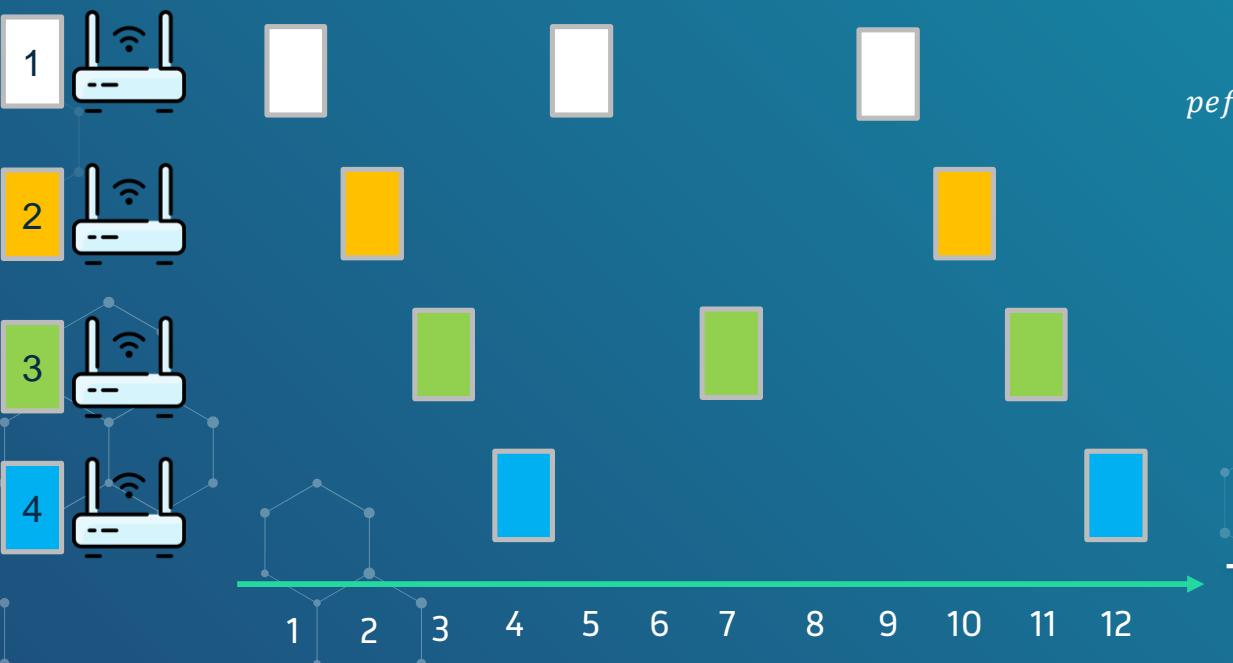


$$\text{performance} = \frac{10}{12} \times 100 = 83.3\%$$



ALOHA protocol

- ❖ Node transmits as soon as it has a frame.
- ❖ If a collision is detected, it waits for a random time interval and then retransmits.

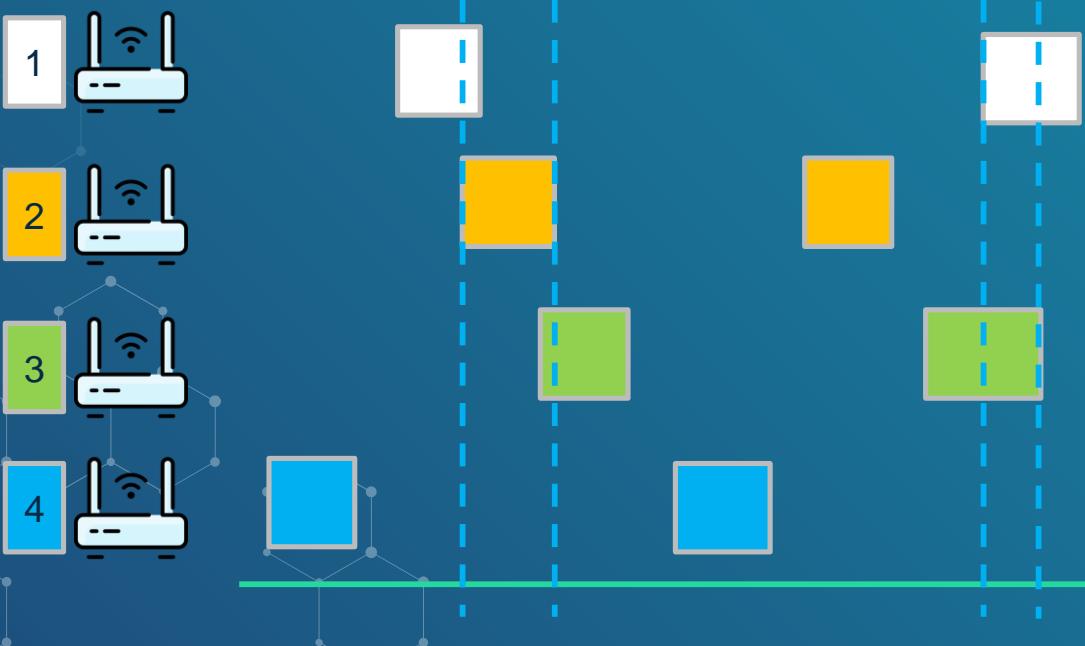




ALOHA protocol

- ❖ Node transmits as soon as it has a frame.
- ❖ If a collision is detected, it waits for a random time interval and then retransmits.

$$S_{out} = S_{in}$$


$$S_{out} = P_{succ} \times G$$

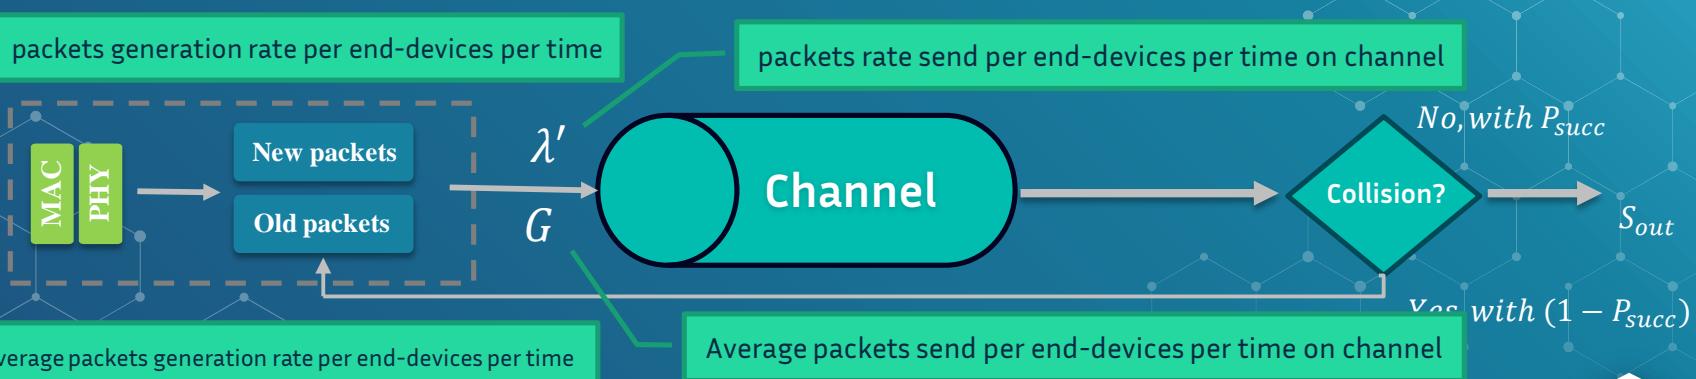



ALOHA protocol implemented on LoRaWAN

$$P[k \text{ occur in } G \text{ time}] = \frac{G^k}{k!} e^{-G}$$

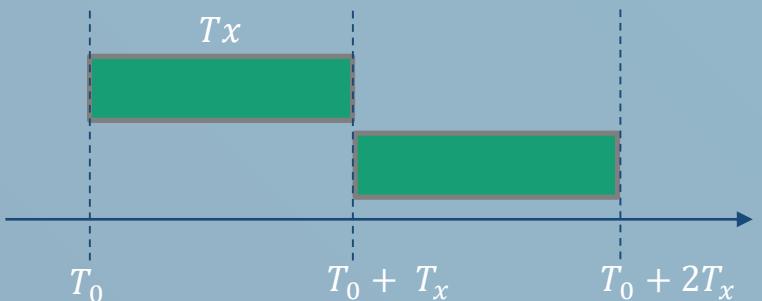


$$P[k = 0] = \frac{G^0}{0!} e^{-2G} \quad P[k = 0] = e^{-2G}$$

$$S_{out} = G e^{-2G}$$




ALOHA protocol

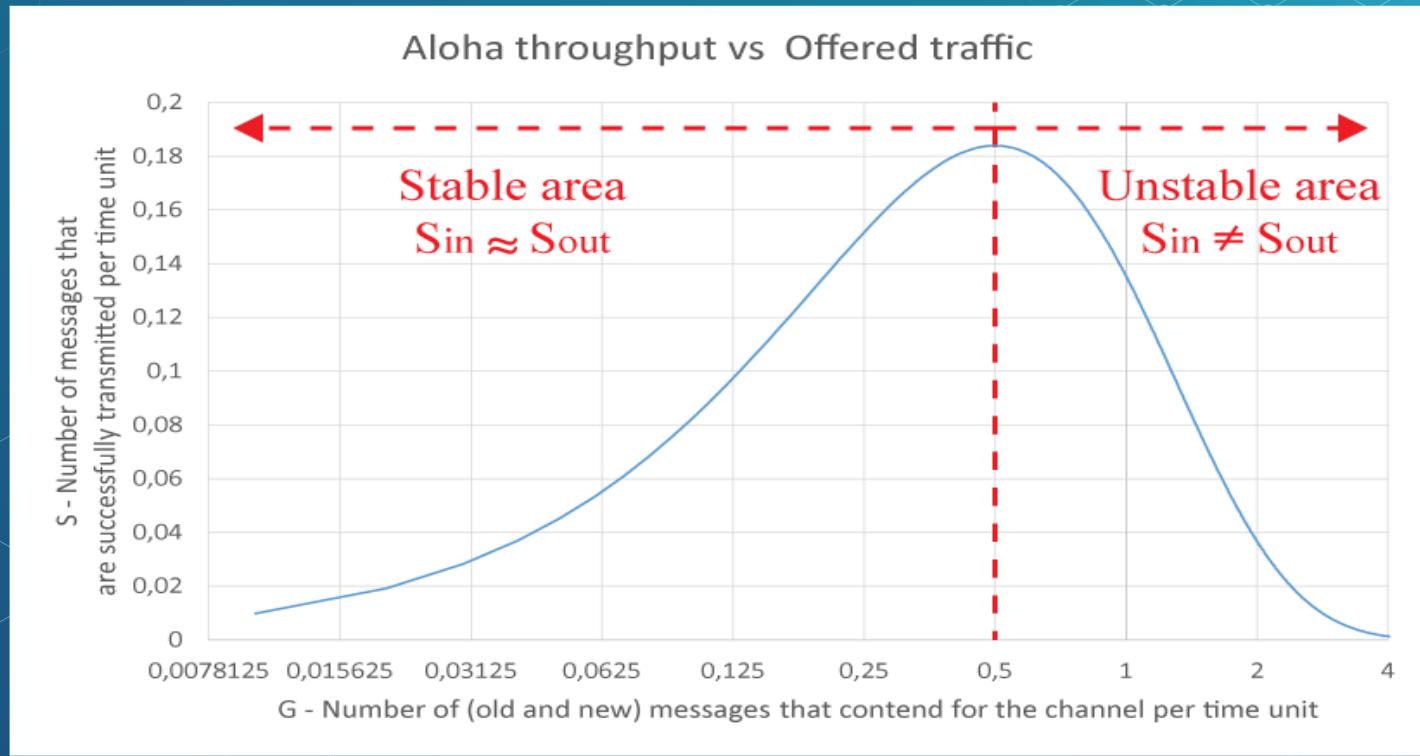




Slotted-ALOHA protocol

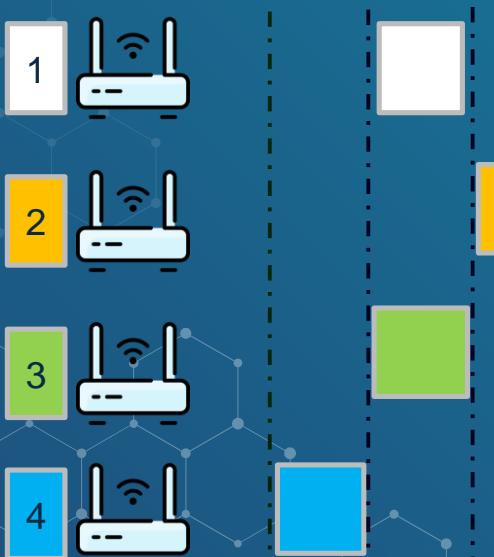

$$P[k \text{ occur in } G \text{ time}] = \frac{G^k}{k!} e^{-G}$$

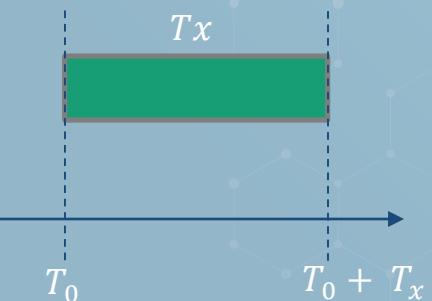


$$P[k = 0] = \frac{G^0}{0!} e^{-G}$$

$$S_{\text{out-slotted}} = Ge^{-G}$$



Slotted-ALOHA

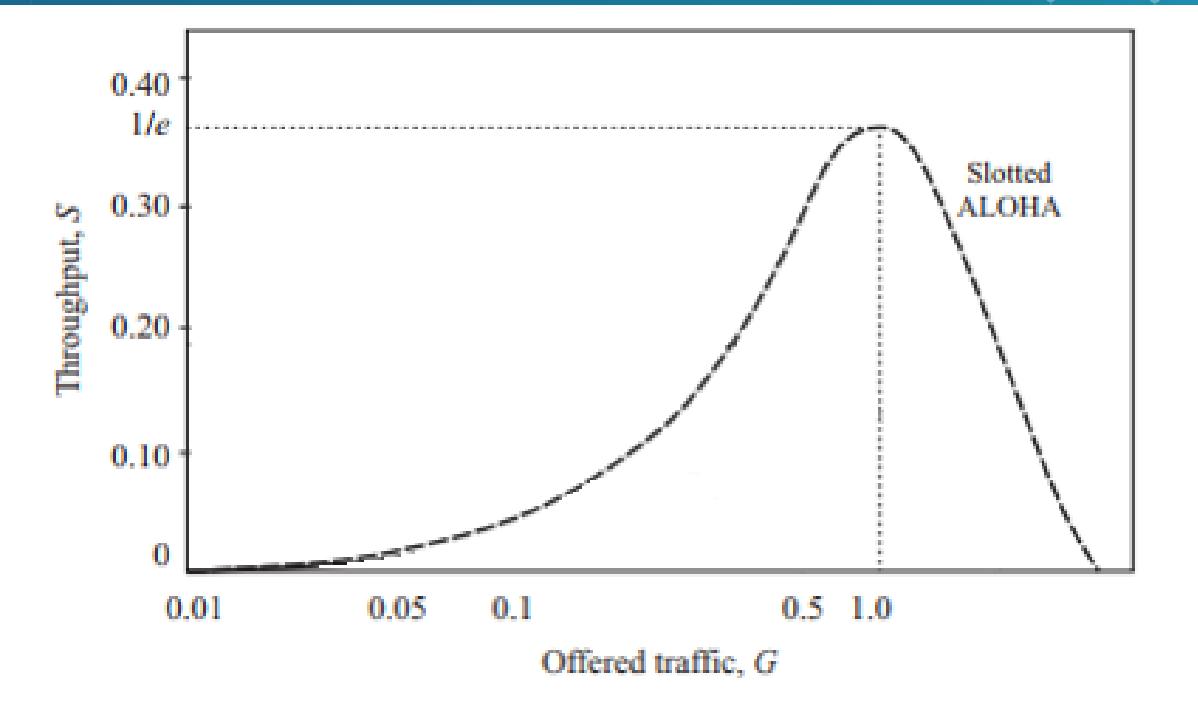



7

ALOHA protocol implemented on LoRaWAN



ALOHA protocol implemented on LoRaWAN

- ❖ λ represents all the packets sent to the network by all the LoRa devices in the same coverage area, so we can rewrite λ as:

$$\lambda = N \cdot \lambda_i$$

λ_i = Represents the throughput of one device

N = The number of devices on the coverage area

- ❖ Each packet sent by one LoRa device, will select randomly one channel from the 8 available, so the total throughput sent by one LoRa devices per channel will be:

$$\lambda_{i \text{ per channel}} = \frac{\lambda_i}{8 \text{ channel}}$$



Maximum throughput per end-device and per channel

- ❖ Considering packets of 16B payload, a bandwidth of 125 kHz and two available sub-bands on LoRaWAN (Band0 from 868.1 MHz to 868.5 MHz and Band1 from 867.1 MHz to 867.9 MHz).

	Max. daily packets per end-device [packets/day]	Max. λ_i per end-device [packets/sec]	Max. λ_i per channel [packets/sec]
SF7	26122	0,302	0,037
SF8			
SF9			
SF10			
SF11			
SF12	1080	0,012	0,001

Table 3: Theoretical Ton-the-air and maximum number of daily packets [10].

$$\text{Max. } \lambda_i = \frac{26122}{86400} = 0,302$$



Maximum throughput per end-device and per channel

$$G = T_{tx} \times \lambda$$

$$S(G = 0.5) = 18.4 \%$$

$$G_{SF7} = 0.302 \times 0.037 = 0.011174 \quad G_{SF7} < 0.5$$

❖ We can obtain the maximum number of end-devices N.

$$N = \frac{0.5}{T_{tx} \times \lambda}$$

$$0.5 - G_{SF7} = 0.488826$$



Maximum throughput per end-device and per channel

$$G = T_{sf} \times \lambda \quad S(G = 0.5) = 18.4\%$$

We can obtain the maximum number of end-devices in two different Scenario:

$$G_{SF7} = 0.302 \times 0.037 = 0.011174 \quad G_{SF7} < 0.5 \quad 0.5 - G_{SF7} = 0.488826$$

Scenario 1: maximizing the packets send by the end-devices

- ❖ We can obtain the maximum and throughput of network.

$$N = \frac{0.5}{G_{SF7}}$$

Scenario 2: considering 1 packet per end-device and per day.



Maximum throughput per end-device and per channel Scenario 1

	Max. daily packets per end-device [packets/day]	$T_{\text{on-the-air}}$ [sec]	Max. λ_i per channel [packets/sec]	N
SF7	26122	0,302	0.00825	198
SF8				
SF9				
SF10				
SF11				
SF12	1080	0,012	0.201625	198

Table 4: Theoretical Ton-the-air and maximum number of daily packets [10].

$$T_{tx_SF7_125kHz_16B} = 0.066$$

$$\lambda_i \text{ per channel} = \frac{0.066}{8} = 0.00825$$

$$N = \frac{0.5}{0.302 \times 0.00825} = 198$$



Maximum throughput per end-device and per channel Scenario 1

	Max. daily packets per end-device [packets/day]	$T_{\text{on-the-air}}$ [sec]	Max. λ_i per channel [packets/sec]
SF7	1	0,066	0.00000144
SF8			
SF9			
SF10			
SF11			
SF12	1	1,613	0.00000144

Table 5: Theoretical Ton-the-air and maximum number of daily packets [10].

N
5172000
214149

$$N = \frac{0,5}{0,066 \times 0,00000144} = 5172000$$

Maximum throughput per end-device and per channel


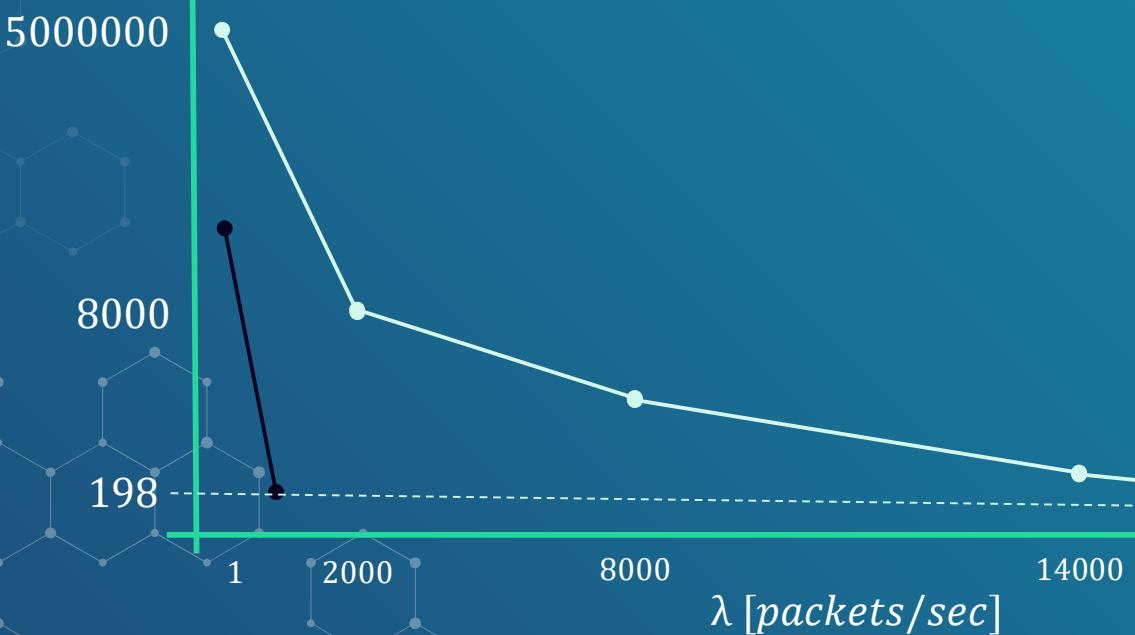


Figure 7: Maximum throughput per end-device and per channel [10].



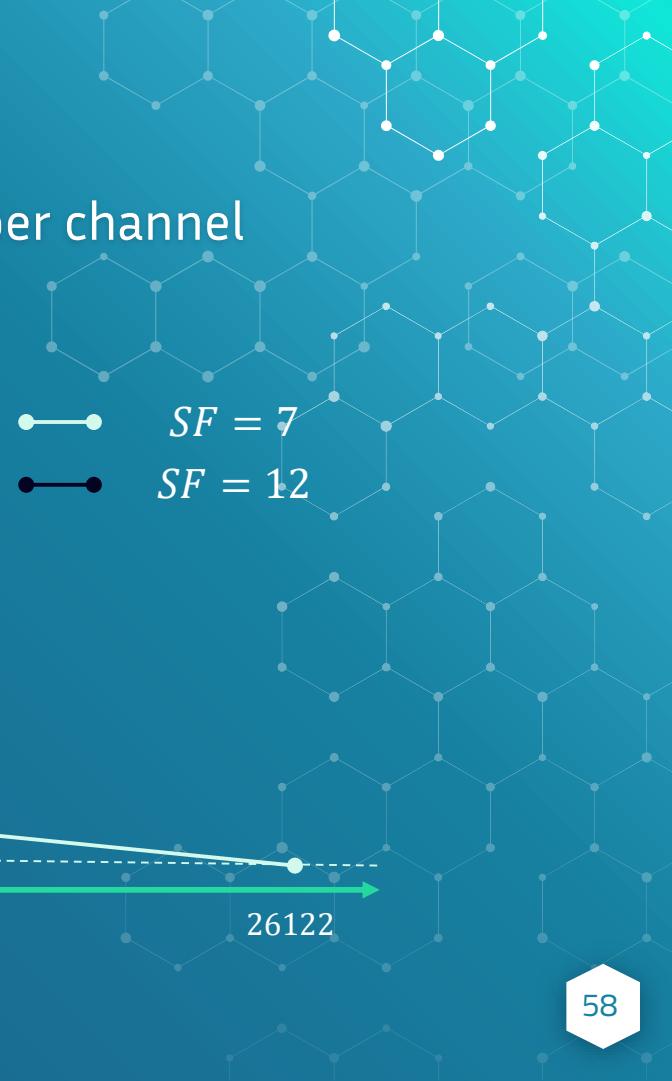

We will continue

1- Delay Analyze

2- Interference Analyze

3- Energy consumption Analyze

4- Network model

6- Deep Analyze related work

- ❖ Channel
- ❖ Network components
- ❖ Applications
- ❖ System model



Reference

- [1] Peter J. Ryan 1 and Richard B. Watson, "*Research Challenges for the Internet of Things: What Role Can OR Play?*", systems journal, 14 March 2017.
- [2] P.P.Ray, A survey on Internet of Things architectures, Journal of King Saud University - Computer and Information Sciences, Volume 30, Issue 3, July 2018, Pages 291-319.
- [3] LPWAN white paper, Leverage LLC, 2020 | www.leverage.com
- [4] J. Babaki, M. Rasti and R. Aslani, "Dynamic Spreading Factor and Power Allocation of LoRa Networks for Dense IoT Deployments," 2020 IEEE 31st Annual International Symposium on Personal, Indoor and Mobile Radio Communications, 2020, pp. 1-6, doi: 10.1109/PIMRC48278.2020.9217283.
- [5] What is LoRaWAN® Specification, <https://lora-alliance.org/about-lorawan/>



Reference

- [6] V. Talla, M. Hessar, B. Kellogg, A. Najafi, J. R. Smith, S. Gollakota, "*LoRa Backscatter: Enabling The Vision of Ubiquitous Connectivity*", Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies, 2017/9/11.
- [7] LoRa™ Modulation Basics, SEMTECH.
- [8] Link Budget Calculation, Training materials for wireless trainers, ICTP.
- [9] T. Bouguera, J.F. Diouris , J.J Chaillout, R.Jaouadi, G. Andrieux, "*Energy Consumption Model for Sensor Nodes Based on LoRa and LoRaWAN*", sensors, 30 June 2018.
- [10] E. Ruano, LoRaTM protocol Evaluations, limitations and practical test, May 11, 2016

THANKS!

You can find me at:

Email: jaber.babaki@gmail.com

GitHub: <https://github.com/JaberBabaki>

Linkedin: <https://www.linkedin.com/in/jaber-babaki-9b5474102/>

Telegram: @jaberALU

