


Installation of Muller Alegro Quad-Creaser

Product Code: QC-MU/ALE-FP-6


48mm Shafts with 96mm Outer Diameter Creasing Unit

with 6mm Fixed Hinge Creasing Width

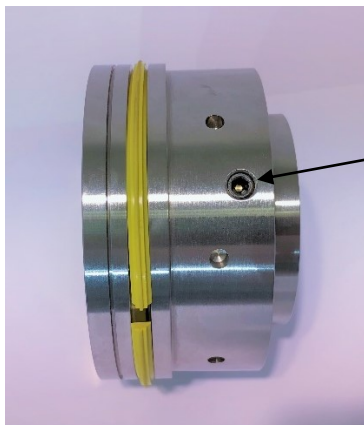


Unscrewing the 1x 8mm screw will allow the collar and mandrel parts to be separated and the Split Gripper Creasing Ribs to be removed or installed.

REMOVING AND REPLACING THE CREASING RIBS

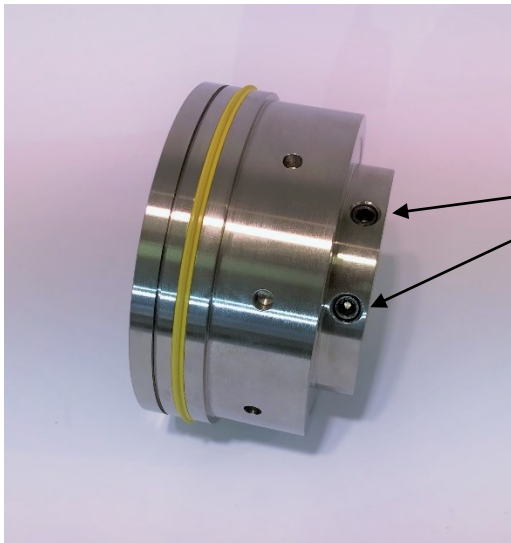

Tighten the 2x 8mm shaft locking screws to secure the creasing unit into position.

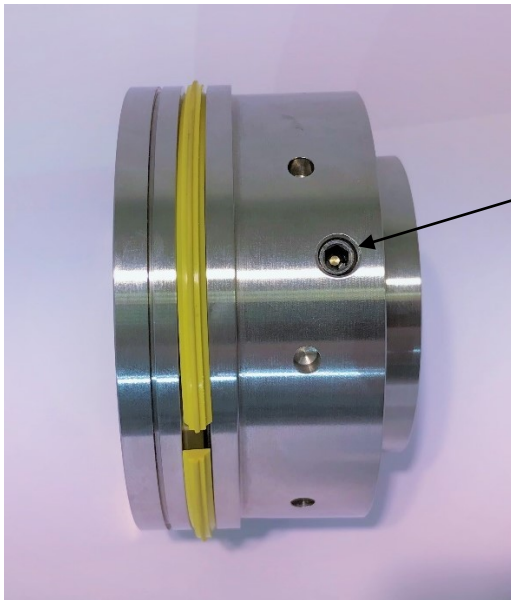

With the 1x 8mm inside screw loosened by a quarter-turn, unscrew the mandrel anti-clockwise apart until the gap is large enough to remove the creasing rib entirely.

To secure creasing rib screw shut the collar/mandrel by turning clockwise and re-tighten inside 8mm screw.



Rubber Creasing Rib Options

Orange – to crease thin cover stocks


Blue – to crease medium cover stocks

Yellow – to crease heavy cover stocks

Plastic Creasing Rib Options

Black (with Yellow Dot) – to crease heavy or laminate cover stocks where fibre-cracking is not an issue.

TOP AND BOTTOM COMPONENT CONFIGURATION

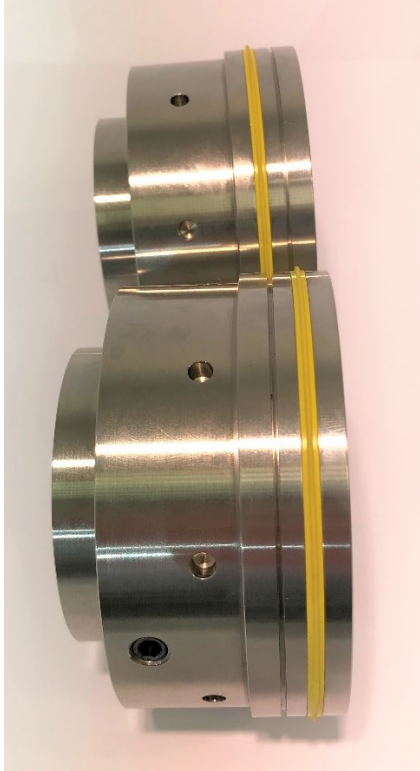

When installed within the machine, the top and bottom components will be configured as shown, with the male creasing rib and corresponding female channel aligned.

Align the **BOTTOM SHAFT** creasing units to the correct position (left side being aligned to the edge of the clamp) **and tighten shaft fixing screw.**

Slowly lower the top shaft creasing unit to make sure the protrusion of the creasing rib locates into the female channel of the bottom creaser unit.

Repeat the procedure for the next shaft.


DO NOT TIGHTEN THE TOP SHAFT FIXING SCREWS.

ACHIEVING OPTIMAL CREASE CENTRALISATION

Slowly run a sheet of cover stock through the Spine & Hinge Creaser units by hand.

As the cover travels through the crease units, the top crease units will automatically centralise to the optimum crease position. With the cover stock still in-between the upper and lower crease units tighten the upper crease unit shaft locking screws.

TOP SHAFT COMPONENTS

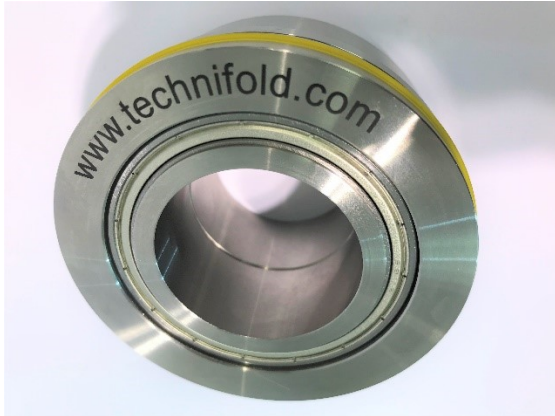

All components are supplied with bearings located in the inside bore.

Using the 8mm fixing screw the Top Shaft Creasing Components can be fixed to the shaft for production once centralised.

If the creasing ribs open-up during production, loosen the fixing screws on the top crease units to allow the creasing units to rotate freely on their in-built bearings.

SETTING AND ADJUSTING SHAFT PRESSURES

When setting for different weights of stock simply insert the correct stock into the calliper blocks and the shafts will automatically be set to the correct pressure.

The machine is now ready to test.