


PACKAGE CONTENTS





- (A) Male Component
- (B) Female Component
- (C) 2 x Orange Creasing Ribs
Stock Range: 85 – 200gsm
- (D) 2 x Blue Creasing Ribs
Stock Range: 200 – 270gsm

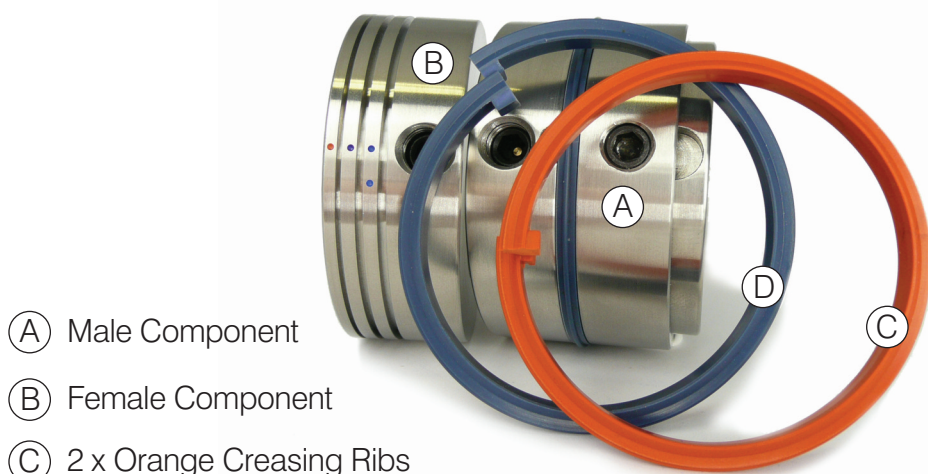

Quick change over of Creasing Ribs

Instant change of crease styles

It takes just seconds to substitute a creasing rib

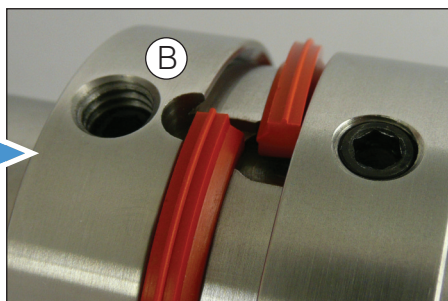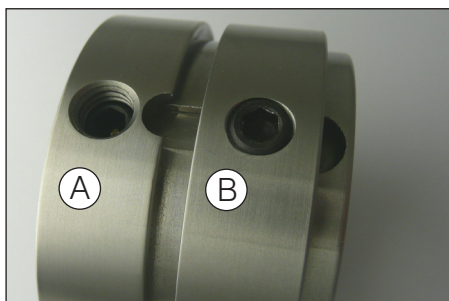

- Screw A is the shaft fixing screw. To install creasing rib, loosen screw B and slide locking collar apart.
- Using the creasing guide, select the correct coloured rib.
- Push the rib inner lugs into the deep recessed channel.
- Slide the locking collar back into the fixing position and tighten screw B.

Crease Style Sample Guide

● 85 – 200gsm

● 200 – 250gsm

● 230 – 270gsm

For best results,
crease on top of
area to be folded

www.technifold.com

Tel: +44 (0)1455 554 491 Fax: +44 (0)1455 554 526 Email: info@technifold.co.uk
Tech-ni-Fold Ltd, Unit 2, St John's Business Park, Lutterworth, Leicestershire, LE17 4HB, UK