
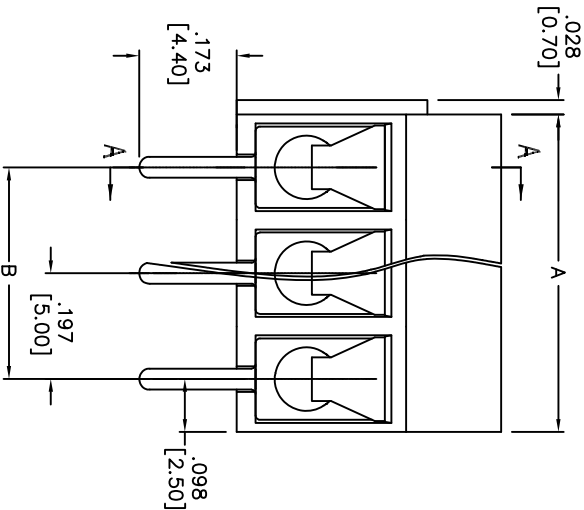
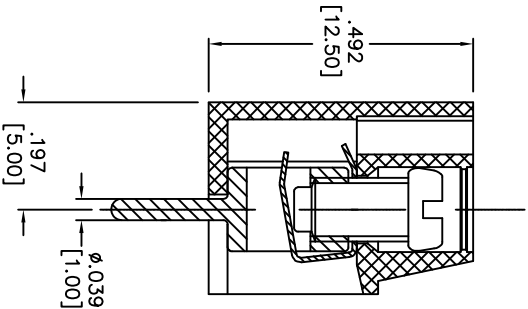
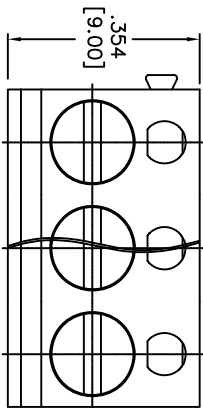


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/14	

APPROVED: _____

DATE: _____ TITLE: _____

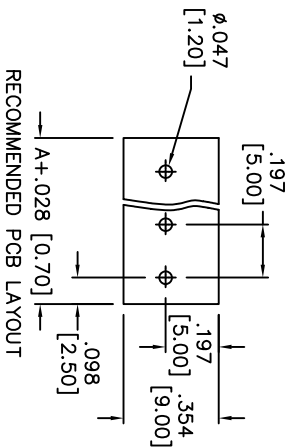

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Brass, Tin plated

Shrapnel: Phosphor Bronze, Nickel plated

Screw: M3 Steel, Zinc plated

Electrical:

Operational voltage: 250 VAC max

Current rating: 16 Amps

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Wire range: 22-14AWG, 1.5mm²

Mechanical:

Torque: 0.5Nm (4.5Lb.In)

Strip length: 4-4.5mm

Temperature Rating:

Operating temperature: -30°C to +120°C

Environmental:

Lead free, RoHS compliant.

ROHS
COMPLIANT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE

.197" [5.00] PITCH, TERMINAL BLOCK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN AY	10/22/14
CHECKED MW	10/22/14
APPROVED	

SIZE	PART NO.	REV.
X	EBAA-XX-C	-
REF: S00067C	SCALE: NTS	SHEET 1 OF 1