NEXUS SOLUTIONS

Powering Progress, Protecting Lives

EARTHING & LIGHTNING PROTECTION SOLUTIONS

Powering Progress, Protecting Lives

Nexus Solutions provides reliable earthing, lightning protection and electrical safety products for industrial, commercial and infrastructure applications.



- Earthing Electrodes
- Lightning Arresters
- Backfill Compound
- Earthing Strips
- Cable Trays
- LPS Accessories

+91 89053 02210

info@mynexussolutions.in

www.mynexussolutions.in

Plot No. 153, Thirumalai Nagar, Pullilion Village, Vadaperumbakkam, Chettimedu, Madhavaram, Chennai – 600060



NEXUS SOLUTIONS
Powering Progress, Protecting Lives

PRODUCT CODE NS ESE LA-001

ESE Lightning Arrester

Protection Radius

According to NFC 17 102:2011, the standard protection radius (R) of the ESE is linked to AT (below). The protection radius of an ESE is related to its height (h) relative to the surface to be protection

Protection Level	Level I D=20			Level I D=45			Level I D=60		
ΔT µs	25	40	60	25	40	60	25	40	60
Model	NSESE 1	NSESE 2	NSESE 3	NSESE 4	NSESE 5	NSESE 6	NSESE 7	NSESE 8	NSESE 9
h (m)	25	40	60	25	40	60	25	40	60
2	17	23	32	23	30	40	26	34	44
3	25	35	48	34	45	59	39	50	65
4	34	46	64	46	60	78	52	67	87
5	42	58	79	57	75	97	65	83	107
6	43	59	79	58	76	97	66	84	107
7	44	59	79	59	76	98	67	87	108
10	45	60	80	60	77	99	68	88	109

r (m)

- 20m for protection level I
- 30m for protection level II
- 45m for protection level III
- 60m for protection level IV

Δ (m)

$\Delta = \Delta T \times 10^6$

Field experience has proved that is equal to the efficiency obtained during the ESE Air Terminal evaluation tests.

- Where h>5m, then R, can be calculated from
- R. (h) = $2rh-h^2+\Delta(2r+\Delta)$
- Where 2m <h< 5m, then R. can be calculated from
- R. = hxR,(5)/5
- R, (h) (m) is the protection radius at a given height h
- h (m) is the height of the ESE air terminal tip over the horizontal plane through the furthest point of the object to be protected.
- Wide area of Protection from 35 meters to 107 mtr radius



NEXUS SOLUTIONS
Powering Progress, Protecting Lives

EARTHING ELECTRODES

PRODUCT CODE NSGI-002

GI earthing electrode Strip in pipe

Model	Length Mtr	Terminal Size	Inner Strip	Outer Pipe Diameter (min) mm
40 NSGI	1, 2&3	40 x 6	25 x 3	48
50 NSGI	1, 2&3	40 x 6	25 x 3	58
80 NSGI	1, 2&3	50 x 6	25 x 3	88

- Hot dip galvanized for corrosion protection
- Designed for fast fault current dissipation
- Low maintenance on site
- Easy & fast installation on site
- Most suitable for soil condition with pH value 5.0 & 8.0
- Moisture booster chemical bags provided for low earth resistance.







PRODUCT CODE NSCT-003

Copper terminal earthing electrode

Model	Length Mtr	Terminal Size	Inner Strip	Outer Pipe Diameter (min) mm
40 NSCT	1, 2&3	40 x 6	25 x 3	40
50 NSCT	1, 2&3	40 x 6	25 x 3	50
80 NSCT	1, 2&3	50 x 6	25 x 3	80

- Hot dip galvanized for corrosion protection
- Designed for fast fault current dissipation
- Low maintenance on site
- Easy & fast installation on site
- Most suitable for soil condition with pH value 5.0 & 8.0
- Moisture booster chemical bags provided for low earth resistance.

PRODUCT CODE NSCBR-004

PURE COPPER EARTHING ELECTRODE.

Models	Rod Diameter (mm)	Length (mm)	Copper Bonding
NS 14.2/1CBR	14.2	1000	250 Micron
NS 14.2/2CBR	14.2	2000	250 Micron
NS 14.2/3CBR	14.2	3000	250 Micron
NS 17.2/1CBR	17.2	1000	250 Micron
NS 17.2/2CBR	17.2	2000	250 Micron
NS 17.2/3CBR	17.2	3000	250 Micron
NS 23.2/2CBR	23.2	2000	250 Micron
NS 23.2/3CBR	23.2	3000	250 Micron
NS 25.2/2CBR	25	2000	250 Micron
NS 25.2/3CBR	25	3000	250 Micron

- Copper Bonded Rod are available in 100 and 250 micron coating.
- UL Listed and Certified



NEXUS SOLUTIONS
Powering Progress, Protecting Lives

PRODUCT CODE NSGI-005



GI earthing electrode Strip in pipe

Model	Length, Mtr	Terminal Size	Inner Strip	Outer Pipe Diameter (min) mm
40 NSGI	1, 2&3	40 x 6	25 x 3	48
50 NSGI	1, 2&3	40 x 6	25 x 3	58
80 NSGI	1, 2&3	50 x 6	25 x 3	88

- Hot dip galvanized for corrosion protection
- Designed for fast fault current dissipation
- Low maintenance on site
- Easy & fast installation on site
- Most suitable for soil condition with pH value 5.0 & 8.0
- Moisture booster chemical bags provided for low earth resistance.

PRODUCT CODE NSCB-006

Copper Bonded earthing electrode



Model	Length, Mtr	Terminal Size	Inner Strip	Outer Pipe Diameter (min) mm
40 NSCB	1, 2&3	40 x 6	25 x 3	48
50 NSCB	1, 2&3	40 x 6	25 x 3	58
80 NSCB	1, 2&3	50 x 6	25 x 3	88

- Hot dip galvanized for corrosion protection
- Designed for fast fault current dissipation
- Low maintenance on site
- Easy & fast installation on site
- Most suitable for soil condition with pH value 5.0 & 8.0
- Moisture booster chemical bags provided for low earth resistance.



PRODUCT CODE NS PC-007

PURE COPPER EARTHING ELECTRODE.

Model	Length, Mtr	Terminal Size	Inner Strip	Outer Pipe Diameter (min) mm
40 NSPC	1, 2&3	40 x 6	25 x 3	48
50 NSPC	1, 2&3	40 x 6	25 x 3	58
80 NSPC	1, 2&3	50 x 6	25 x 3	88


- Hot dip galvanized for corrosion protection
- Designed for fast fault current dissipation
- Low maintenance on site
- Easy & fast installation on site
- Most suitable for soil condition with pH value 5.0 & 8.0
- Moisture booster chemical bags provided for low earth resistance.

NEXUS SOLUTIONS
Powering Progress, Protecting Lives

Durable. Reliable. Built for a Safer Tomorrow.


A complete range of pit covers and chambers for earthing, grounding and utility applications.

ROUND PIT COVERS (POLY PLASTIC)



SMALL PIT COVER

Material	Poly Plastic
Size	6 Inches



BIG PIT COVER

Material	Poly Plastic
Size	10 Inches

SQUARE PIT COVER (POLY PLASTIC)



BIG PIT COVER

Material	Poly Plastic
Size	300X300 mm

RCC CHAMBER



Available Sizes (mm)

250x250 300x3m 350x350 400x400
450x450 600x600 650x650


FRP CHAMBER



Available Sizes (mm)

250x250 300x300 350x350
450x450 600x600 650x650

CI CHAMBER

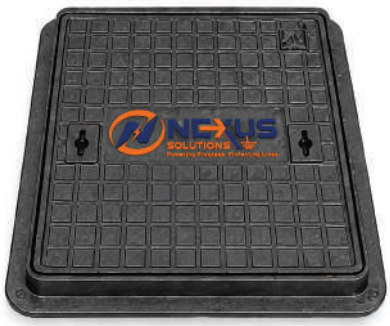

Available Sizes (mm)

250x250 300x300 350x350 400x400
450x450 600x600 650x650

STRONG & DURABLE

EASY INSTALLATION

LONG SERVICE LIFE

IDEAL FOR EARTHING & UTILITY APPLICATIONS

NEXUS SOLUTIONS
Powering Progress, Protecting Lives

"NEXUS" BACKFILL COMPOUND



Quantity	No. of Bags
25 kg.	1
15 kg.	1

- No Need to add water overtime.
- Resistivity less than 0.2 ohm-meter.
- The soil moist for a longer period and lowers ground resistance.
- Graphite based having some more.
- Non toxic content.
- Its maintain conductivity without continuous presence of water.
- Tested from NABL accredited Lab.

"NEXUS" ALL TYPES OF G.I. STRIP



- HOT DIP GI Earthing Strips covered with a protective coating of zinc that greatly to reduce its tendency to corrode and extends its expectancy.
- Zinc Coating with minimum 86 Microns extends life expectancy upto 15 years
- All Size GI Strips Available starting from 25x3mm, 25x6mm, 50x3mm, 50x6mm, 100x6mm, 100x12mm.

"NEXUS" COPPER EARTHING STRIP



- Copper Earthing Strips used as HV electrodes for standard earthing arrangements on ground mounted LV MV HV substations.
- Copper Strip protect against atmospheric corrosion and hence provide longer life under corrosive atmosphere.
- All Size Available From 25x3mm to 100x10mm With EC Grade & 99.9% Cu Purity.

NEXUS SOLUTIONS
Powering Progress, Protecting Lives

LPS ACCESSORIES

High quality LPS accessories for reliable earthing, lightning protection and electrical safety across all applications.

INSTALLATION ACCESSORIES


Ridge Saddle


Heavy Duty Conductor Saddle


Square Tape Clamp


Air Terminal Base


Tee Clamp


DC Tape Clip


Air Terminal Rod


PVC/LSOH Insulated Copper Tape


Tape Clip


Plate Test Clamp

CONNECTING COMPONENTS


Earthing Clamp


U Bolt Rod Clamp Type - E


Rod to Tape Clamp


U Bolt Rod Clamp


Rod to Cable Clamp


B Bond


Split Connector Clamp


Tower Earth Bond


Copper Tape


Pipe Clamp


CI Pipe earthing


wire and cable


copper wire


wire and cable


wire and cable

NEXUS SOLUTIONS
Powering Progress, Protecting Lives

COPPER / COPPER BONDED / SPIKE LIGHTNING ARRESTER



Spike Lightning Arrester is a metal rod, made of copper and used as part of lightning safety to protect tall or isolated structures such as the roof of a building or the mast of a vessel from lightning damage.

Standard: IEC - 62305

Material: Pure Copper / Bonded Copper / Hollow Copper

Technology: Conventional Type

Diameter	Length
16mm (Solid Rod)	1 mtr
16mm (Solid Rod)	2 mtr
25mm (Hallow Pipe)	1 mtr
25mm (Hallow Pipe)	2 mtr

CABLE TRAY




Cable tray system is used to support insulated electrical cables used for power distribution, control & communication. Cable trays are used as an alternative to open wiring or electrical conduit systems & are commonly used for cable management in commercial & industrial construction. They are especially useful in situations where changes to a wiring system are anticipated, since new cables can be installed by laying them in the tray, instead of pulling them through a pipe. Being transparent it makes it easier to identify, distribute & make a visual check of the network.

Material Available

- Galvanized steel
- Stainless steel
- Aluminum

Surface Finish

- Pre Galvanized steel
- Hot Dip Galvanized
- Powder Coated

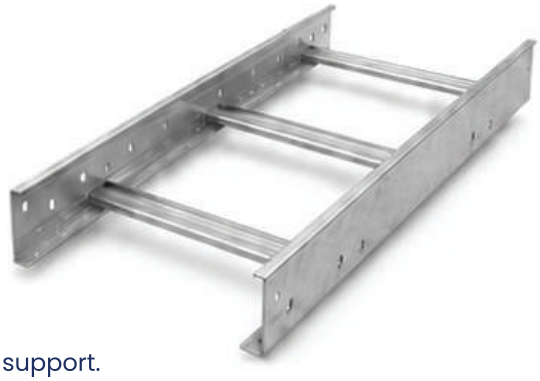

Perforated Type

Perforated type:

- Vertical perforation
- Horizontal perforation (depth) perforation

Ladder Type

LADDER TYPE

- Cable ladder are preferred for supporting high volume or heavy cabling, especially if there are long spans between support.

a) Bolted ladder cable tray basically it is send in knocked down condition to be assembled at sites.

b) Welded ladder cable trays.

CONTACT US

+91 89053 02210

info@mynexussolutions.in

www.mynexussolutions.in

Plot No. 153, Thirumalai Nagar, Pullilion Village, Vadaperumbakkam, Chettimedu, Madhavaram, Chennai – 600060