
Please read CAUTION and Notice in this catalog for safety. This catalog has only typical specifications. Therefore you are requested to approve our product specification or to transact the approval sheet for product specification, before your ordering.

P61E7.pdf 01.10.17

Ceramic Filters (CERAFIL®) for FM Receivers

CERAMIC FILTERS (CERAFIL®)



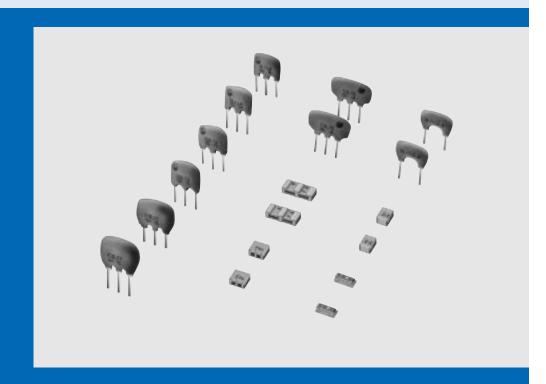



Cat.No.P61E-7

CONTENTS

CERAFIL® and "CERAFIL" in this catalog are the trademarks of Murata Manufacturing Co., Ltd.

4

Part Numbering ————————————————————————————————————	2	2
1 CERAFIL® Chip Type SFECV Series	3	
● Chip CERAFIL® SFECV Series Notice	6	3
2 CERAFIL® Small Chip Type SFECS Series —		
● Chip CERAFIL® SFECS Series Notice	10	4
3 CERAFIL® Standard Lead Type		
4 CERAFIL® Low-loss Type		5
5 CERAFIL® Low-profile Type	17	
6 CERAFIL® Lower Spurious Response Type		6
7 CERAFIL® Wider Band-width Type		
8 CERAFIL® Narrow Band Type		7
9 CERAFIL® For FM -IF Tuners —		
10 CERAFIL® Three-Elements Type SFTLA Series —	33	8
Lead Type CERAFIL® Test Circuit and Characteristics Data		
Lead Type CERAFIL® Characteristics Data and Notice		9
11 Discriminators Chip Type CDACV Series	38	
Chip Type Discriminators CDACV Series Notice		10
12 Discriminators Chip Low-profile Type CDSCA Series		
Chip Type Discriminators CDSCA Series Notice	44	11
13 Discriminators CDALA Series —	45	
Lead Type Discriminators Notice	49	12
Packaging —	50	
Test Circuit of Ceramic Discriminator	53	13
Example of Appllied Circuit	54	

Part Numbering (The structure of the "Global Part Numbers" that have been adopted since June 2001 and the meaning of each code are described herein.)
Part Numbering (The structure of the "Global Part Numbers" that have been adopted since June 2001 and the meaning of each code are described herein.)

CERAFIL® for FM

(Global Part Number)

)	SF	E	LA	10M7	FAA0	-R0
	0	2	8	4	6	6

Product ID

Product ID	
SF	Ceramic Filters

2Oscillation/Numbers of Element

Code	Oscillation/Numbers of Element		
E	2 Elements Thickness Expander mode		
Т	3 Elements Thickness Expander mode		
К	2 Elements Thickness Expander mode (2nd Harmonic)		
v	2 Elements Thickness Expander mode (3rd Over Tone)		

3Structure/Size

Code	Structure/Size
L	Lead Type
C□	Chip Type

☐ is expressed "A" or subsequent code, which indicates the size.

4 Nominal Center Frequency

Expressed by four-digit alphanumerics. The unit is in hertz (MHz). Decimal point is expressed by capital letter " \mathbf{M} ".

Discriminators for FM

(Global Part Number)	CD	Α	LA	10M7	GA	001	-R0
	•	•	_		_	•	_

1 Product ID

Product ID	
CD	Discriminators

2Oscillation

Code	Oscillation
Α	Thickness Expander mode

3Structure/Size

Code Structure/Size	
L	Lead Type
C□	Chip Type

☐ is expressed "A" or subsequent code, which indicates the size.

4 Nominal Center Frequency

Expressed by four-digit alphanumerics . The unit is in hertz (MHz). Decimal point is expressed by capital letter " \mathbf{M} ".

6Product Specification

Code	Product Specification
FAA0	Four-digit alphanumerics express pass-bandwidth, center frequency tolerance, rank, series, others.

6 Packaging

Code	Packaging
-B0	Bulk
-R0	Plastic Taping ø180mm
-R1	Plastic Taping ø330mm
-A0	1500pcs. /Radial Taping H ₀ =18mm
-A1	1000pcs. /Radial Taping H ₀ =18mm

Radial taping is applied to lead type and plastic taping to chip type. With non-standard products, two-digit alphanumerics indicating "Individual Specification" is added between "§Product Specification" and "§Packaging".

5Product Specification

Code	Product Specification	
GA	Two-digit alphanumerics express type, center frequency, rank, others	

6IC

Code	IC
001	Applicable IC Control Code

Packaging

Code	Packaging
-B0	Bulk
-A0	Radial Taping H ₀ =18mm
-R0	Plastic Taping (ø180mm)
-R1	Plastic Taping (ø330mm)

Radial taping is applied to lead type and plastic taping to chip type. With non-standard products, an alphanumerics indicating "Individual Specification" is added between "GIC" and "Packaging".

muRata

1

CERAFIL® Chip Type SFECV Series

SFECV10M7 series for FM-receivers are monolithic type ceramic filters which utilize the energy trapped thickness vibration-mode of the piezoelectric ceramic. By taking advantage of the very low profile, new SFECV series and PFWCC(kHz filter for AM receiver) enable costomers to make AM/FM set so thin, and it can be of help to the total chip circuit.


■ Features

- 1. Super-thin. Only 1.5mm. The most suitable ceramic filter available for thinning substrates.
- 2. Heat resistant. Reflow soldering can be performed because of its excellent heat resistance.
- Piezoelectric element is connected in the sandwich shape by heat resistant substrate, thus it has excellent mechanical strength, and it is suitable for automatic mounting.
- 4. Various bandwidths are available. Select a suitable type in accordance with the desired selectivity.
- 5. Electrical characteristics are the same as conventional "CERAFIL".

■ Applications

- 1. Small, thin radios
- 2. Automotive radios
- 3. Headphone steros





* : EIAJ Monthly Code ** : Center Frequency Rank Code

(in mm)

Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFECV10M7KA00-R0	10.700 ±30kHz	within110 ±30kHz	320 max.	within6.0 ±2.0dB	35 min.
SFECV10M7JA00-R0	10.700 ±30kHz	within150 ±40kHz	380 max.	10.0 max.	30 min.
SFECV10M7HA00-R0	10.700 ±30kHz	within180 ±40kHz	470 max.	within4.0 ±2.0 dB	35 min.
SFECV10M7GA00-R0	10.700 ±30kHz	within230 ±50kHz	510 max.	within3.5 ±2.0 dB	35 min.
SFECV10M7FA00-R0	10.700 ±30kHz	within280 ±50kHz	590 max.	within3.0 ±2.0 dB	35 min.


Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.

■ Center Frequency Rank Code


■ Center Frequency Rank Code				
CODE	30kHz Step	25kHz Step		
D	10.64MHz±30kHz	10.650MHz±25kHz		
В	10.67MHz±30kHz	10.675MHz±25kHz		
Α	10.70MHz±30kHz	10.700MHz±25kHz		
С	10.73MHz±30kHz	10.725MHz±25kHz		
E	10.76MHz±30kHz	10.750MHz±25kHz		
Z	Combination A,B,C,D,E			
М	Combination A,B,C			


■ Frequency Characteristics


70 9.700




10.700 Frequency (MHz)












■ Frequency Characteristics (Spurious)







Continued from the preceding page.


■ Frequency Characteristics (Spurious)








■ Standard Land Pattern Dimensions



Land (in mm)

■ Test Circuit




$$\begin{split} Rg &= 50\Omega \quad R_1 = 280\Omega \pm 5\% \quad R_2 = 330\Omega \pm 5\% \\ C_2 &= 10 \pm 2 \text{ pF (Including stray capacitance and Input capacitance of RF Volt Meter)} \\ E_1: S.S.G. \quad S.S.G. Output Voltage \end{split}$$

Chip CERAFIL® SFECV Series Notice

■ Notice (Soldering and Mounting)

1. Standard Reflow Soldering Condition

(1) Reflow

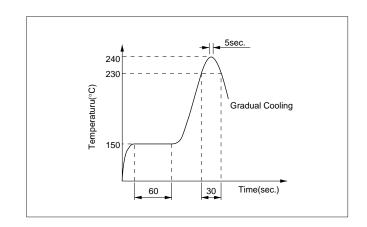

(2) Soldering Iron


Lead terminal is directly contacted with the tip of soldering iron of 280±5°C for 3.0±0.5 seconds.

2. Wash

The component cannot be withstand washing.

■ Notice (Handling)

- The component will be damaged when an excessive stress is applied.
- 2. The component may be damaged if excess mechanical stress is applied to it mounted on the printed circuit
- 3. Design layout of components on the PC board to minimize the stress imposed on the warp or flexure of the board.
- 4. After installing chips, if solder is excessively applied to the circuit board, mechanical stress will cause destruction resistance characteristics to lower. To prevent this, be extremely careful in determining shape and dimension before designing the circuit board diagram.
- 5. When the positioning claws and pick up nozzle are worn, the load is applied to the chip while positioning is concentrated to one positioning accuracy, etc. Careful checking and maintenance are necessary to prevent unexpected trouble.
- 6. When correcting chips with a soldering iron, the tip of the soldering iron should not directly touch the chip component. Depending on the soldering conditions, the effective area of terminations may be reduced. the use of solder containing Ag should be done to prevent the electrode erosion.
- 7. Do not clean or wash the component as it is not hermetically sealed.
- 8. In case of covering filter with over coat, conditions such as material of resin, cure temperature, and so on should be evaluated well.
- 9. Do not use strong acidity flux, more than 0.2wt% chlorine content, in re-flow soldering.
- 10. Accurate test circuit values are required to measure electrical characteristics. It may be a cause of miscorrelation if there is any deviation, especially stray capacitance, from the test circuit in the specification.

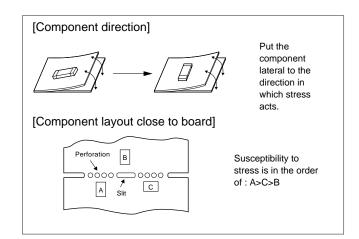

muRata

CERAFIL® Small Chip Type SFECS Series

SFECS10M7 series for FM-receivers are small, high performance and super thin (1.4mm) filters. Piezoelectric element is connected in the sandwich

Piezoelectric element is connected in the sandwick shape by ceramics substrate.

They have 1.4mm thickness and small mounting area. (3.5x3.1mm)

New SFECS series and PFWCC(kHz filter for AM receiver)

New SFECS series and PFWCC(kHz filter for AM received enable customers to make AM/FM set so thin and small sized.

■ Features

- 1. The filters are mountable by automatic placers.
- 2. They are slim, at only 1.4mm thickness, and have a small mounting area (3.5x3.1mm) enabling flexible PCB design.
- 3. Various bandwidths are available. Select a suitable type in accordance with the desires selectivity.
- 4. Operating temperature range :

-20 to +80 (degree C)

Storage temperature range :

-40 to +85 (degree C)

■ Applications

- 1. Small, thin radios
- 2. Headphone stereos

Eq.	Input electrode marker	(1) (2) (3) (3) (4) (4) (1.30)
	0.4 ^{+0.3} 0.0.3 0.6±0.3 0.0.0 0.0.3 0.0.0	(1): Input (2): Ground (3): Float (Signal line) (4): Output (*): Reference : EIAJ Monthly Code

Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFECS10M7HA00-R0	10.700 ±30kHz	within180 ±40kHz	470 max.	within4.5 ±2.0 dB	30 min.
SFECS10M7GA00-R0	10.700 ±30kHz	within230 ±50kHz	510 max.	within3.5 ±2.0 dB	30 min.
SFECS10M7FA00-R0	10.700 ±30kHz	within280 ±50kHz	590 max.	within3.0 ±2.0 dB	30 min.

Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.


■ Center Frequency Rank Code

- Center	Center Frequency Rank Code				
CODE	30kHz Step	25kHz Step			
D	10.64MHz±30kHz	10.650MHz±25kHz			
В	10.67MHz±30kHz	10.675MHz±25kHz			
Α	10.70MHz±30kHz	10.700MHz±25kHz			
С	10.73MHz±30kHz	10.725MHz±25kHz			
E	10.76MHz±30kHz 10.750MHz±25kl				
Z	Combination A,B,C,D,E				
M	Combination A,B,C				


2

■ Frequency Characteristics


SFECS10M7HA00-R0



SFECS10M7GA00-R0




SFECS10M7FA00-R0




■ Frequency Characteristics (Spurious)


SFECS10M7HA00-R0



SFECS10M7GA00-R0




SFECS10M7FA00-R0



■ Standard Land Pattern Dimensions

■ Test Circuit

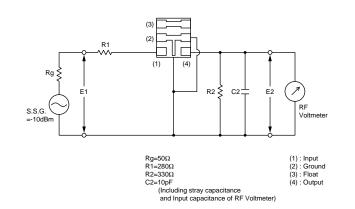

(in mm)

2

Chip CERAFIL® SFECS Series Notice

■ Notice (Soldering and Mounting)

1. Standard Reflow Soldering Condition

(1) Reflow



Filter shall be soldered at 280±5°C for 3.0±0.5 seconds. The soldering iron shall not touch the filter white soldering.


2. Wash


The component cannot be withstand washing.

■ Notice (Handling)

- 1. The component will be damaged when an excessive stress is applied.
- 2. The component may be damaged if excess mechanical stress is applied to it mounted on the printed circuit
- Design layout of components on the PC board to minimize the stress imposed on the warp or flexure of the board.
- 4. After installing chips, if solder is excessively applied to the circuit board, mechanical stress will cause destruction resistance characteristics to lower. To prevent this, be extremly careful in determining shape and dimension before designing the circuit board diagram.
- 5. When the positioning claws and pick up nozzle are worn, the load is applied to the chip while positioning is concentrated to one positioning accuracy, etc. Careful checking and maintenance are necessary to prevent unexpected trouble.
- 6. When correcting chips with a soldering iron, the tip of the soldering iron should not directly touch the chip component. Depending on the soldering conditions, the effective area of terminations may be reduced. The use of solder containing Ag should be done to prevent the electrode erosion.
- 7. Do not clean or wash the component as it is not hermetically sealed.
- 8. In case of covering filter with over coat, conditions such as material of resin, cure temperature, and so on should be evaluated well.
- 9. Do not use strong acidity flux, more than 0.2wt% chlorine content, in re-flow soldering.
- Accurate test circuit values are required to measure electrical characteristics.

It may be a cause of mis-correlation if there is any deviation, especially stray capacitance, from the test circuit in the specification.

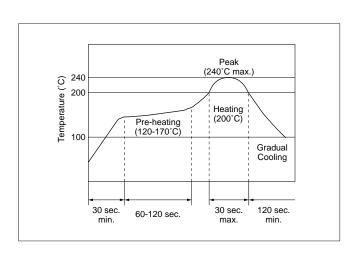



Perforation B
OOO OOO
A Slit

Susceptibility to stress is in the order of : A>C>B

muRata

CERAFIL® Standard Lead Type


SFELA10M7 series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.

■ Features

- 1. These miniature filters have high mechanical strength.
- 2. Low loss, favorable waveform symmetry, and high selectivity.
- 3. Various band widths are available for applications in wide to narrow bands.
- 4. Small dispersion and stable characteristics.
- 5. Change in center frequency is typically within ±30ppm/(degree C) at -20 to +80 (degree C).
- 6. High reliability.




SFELA10M7HA00-B0






SFELA10M7GA00-B0





SFELA10M7FA00-B0




Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFELA10M7HA00-B0	10.700 ±30kHz	within180 ±40kHz	520 max.	7.0 max.	40 min.
SFELA10M7GA00-B0	10.700 ±30kHz	within230 ±50kHz	570 max.	within4.0 ±2.0dB	40 min.
SFELA10M7FA00-B0	10.700 ±30kHz	within280 ±50kHz	650 max.	within4.0 ±2.0dB	30 min.


Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.


■ Center Frequency Rank Code

- Center Frequency Rank Code				
CODE	30kHz Step	25kHz Step		
D	10.64MHz±30kHz	10.650MHz±25kHz		
В	10.67MHz±30kHz	10.675MHz±25kHz		
Α	10.70MHz±30kHz 10.700MHz±25kHz			
С	10.73MHz±30kHz	10.725MHz±25kHz		
E	10.76MHz±30kHz 10.750MHz±25kHz			
Z	Combination A,B,C,D,E			
M	Combination A,B,C			


■ Frequency Characteristics








■ Frequency Characteristics (Spurious)






Continued on the following page.

■ Frequency Characteristics (Spurious)

SFELA10M7FA00-B0 10 20 40 50 60 70 8.700 9.700 10.700 11.700 12.700 Frequency (MHz)

■ Spurious Response

SFELA10M7FA00-B0



3

muRata

CERAFIL® Low-loss Type


SFELA10M7 series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.

■ Features

- Insertion loss is 1 to 1.5dB lower than conventional products. This types are useful for elevating the sensitivity of sets.
- 2. Small dispersion and stable characteristics.
- 3. Excellent shape factor of frequency response.
- 4. Good waveform symmetry.




SFELA_JAA0-B0






SFELA_HAA0-B0






SFELA_GAA0-B0





SFELA_FAA0-B0



Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFELA10M7JAA0-B0	10.700 ±30kHz	within150 ±40kHz	360 max.	within4.5 ±2.0dB	35 min.
SFELA10M7HAA0-B0	10.700 ±30kHz	within180 ±40kHz	470 max.	within3.5 ±1.5dB	35 min.
SFELA10M7GAA0-B0	10.700 ±30kHz	within230 ±50kHz	520 max.	within3.0 ±2.0dB	35 min.
SFELA10M7FAA0-B0	10.700 ±30kHz	within280 ±50kHz	590 max.	within2.5 ±2.0dB	30 min.


Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.




■ Center Frequency Rank Code

	= conton modulone j manit codo				
CODE	30kHz Step	25kHz Step			
D	10.64MHz±30kHz	10.650MHz±25kHz			
В	10.67MHz±30kHz	10.675MHz±25kHz			
Α	10.70MHz±30kHz	10.700MHz±25kHz			
С	10.73MHz±30kHz	10.725MHz±25kHz			
E	10.76MHz±30kHz	10.750MHz±25kHz			
Z	Combination A,B,C,D,E				
М	Combination A,B,C				

■ Frequency Characteristics







10.700 Frequency (MHz)

10.500

10.600


SFELA10M7GAA0-B0






■ Frequency Characteristics (Spurious)

SFELA10M7JAA0-B0




SFELA10M7HAA0-B0



Continued on the following page.

■ Frequency Characteristics (Spurious)

SFELA10M7GAA0-B0 10 20 40 50 60 70 8.700 9.700 10.700 11.700 12.700 Frequency (MHz)



CERAFIL® Low-profile Type


SFELB10M7 series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.


■ Features

- 1. Installed height is 5 mm, making it well suited for compact, thin sets.
- 2. Environmental reliability is the same as those of the ceramic filter SFELA10M7 series.














SFELB10M7JA00-B0

SFELB10M7GA00-B0
















SFELB10M7FA00-B0

7.5±2.0		
MARKING MEIAJ	6.0 max.	
1.5±0.1 1.3±0.1	5.0±1.0	
(1) (2) (3)	3.0±1.0	(1): Input (2): Ground (3): Output in mm


Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFELB10M7KA00-B0	10.700 ±30kHz	within110 ±30kHz	350 max.	within7.0 ±2.0dB	30 min.
SFELB10M7JA00-B0	10.700 ±30kHz	within150 ±40kHz	360 max.	within4.5 ±2.0dB	35 min.
SFELB10M7HA00-B0	10.700 ±30kHz	within180 ±40kHz	470 max.	within3.5 ±2.0dB	35 min.
SFELB10M7GA00-B0	10.700 ±30kHz	within230 ±50kHz	570 max.	within3.0 ±2.0dB	40 min.
SFELB10M7FA00-B0	10.700 ±30kHz	within280 ±50kHz	650 max.	within3.0 ±2.0dB	30 min.


Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.


- Center	Center Frequency Rank Code					
CODE	30kHz Step	25kHz Step				
D	10.64MHz±30kHz	10.650MHz±25kHz				
В	10.67MHz±30kHz	10.675MHz±25kHz				
Α	10.70MHz±30kHz	10.700MHz±25kHz				
С	10.73MHz±30kHz	10.725MHz±25kHz				
E	10.76MHz±30kHz 10.750MHz±25kHz					
Z	Combination A,B,C,D,E					
М	Combination A,B,C					

■ Frequency Characteristics

SFELB10M7KA00-B0








10.900


10.800

10.500


18


10.600








■ Frequency Characteristics (Spurious)











muRata

CERAFIL® Lower Spurious Response Type


SFELA10M7 series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.

■ Features

- 1. This type has lower spurious response compared to the standard filters.
- 2. This types are suitable for higher spurious suppression radio.




SFELA10M7KAB0-B0







SFELA10M7JAB0-B0








SFELA10M7HAB0-B0






SFELA10M7GAB0-B0





SFELA10M7FAB0-B0




Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFELA10M7KAB0-B0	10.700 ±30kHz	within110 ±30kHz	350 max.	7.0 ±2.0dB	45 min.
SFELA10M7JAB0-B0	10.700 ±30kHz	within150 ±40kHz	380 max.	5.5 ±2.0dB	45 min.
SFELA10M7HAB0-B0	10.700 ±30kHz	within180 ±40kHz	520 max.	5.0 ±2.0dB	45 min.
SFELA10M7GAB0-B0	10.700 ±30kHz	within230 ±50kHz	570 max.	3.0 ±2.0dB	45 min.
SFELA10M7FAB0-B0	10.700 ±30kHz	within280 ±50kHz	650 max.	3.0 ±2.0dB	45 min.

Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.


■ Center Frequency Rank Code

= content requested realist						
CODE	30kHz Step	25kHz Step				
D	10.64MHz±30kHz	10.650MHz±25kHz				
В	10.67MHz±30kHz	10.675MHz±25kHz				
Α	10.70MHz±30kHz	10.700MHz±25kHz				
С	10.73MHz±30kHz	10.725MHz±25kHz				
E	10.76MHz±30kHz	10.750MHz±25kHz				
Z	Combination A,B,C,D,E					
М	Combination A,B,C					


■ Frequency Characteristics




SFELA10M7JAB0-B0




SFELA10M7HAB0-B0




SFELA10M7GAB0-B0




SFELA10M7FAB0-B0




■ Frequency Characteristics (Spurious)







SFELA10M7JAB0-B0




SFELA10M7HAB0-B0



SFELA10M7GAB0-B0



SFELA10M7FAB0-B0



Ceramic Filters (CERAFIL $^{\circledR}$) for FM Receivers

muRata

CERAFIL® Wider Band-width Type


SFELA10M7 Series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.

■ Features

- 1. Realizes wider or narrower band characteristics not obtained by conventional ceramic filters.
- Temperature characteristics are the best available, the same as those of Murata's conventional ceramic filters. Thus, even in the case of narrow band filters, the center frequency is stable even if temperature changes.




SFELA10M7EA00-B0





SFELA10M7DF00-B0



Part Number	Center Frequency (fo) (MHz)	Nominal Center Frequency(fn) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFELA10M7EA00-B0	10.700 ±30kHz	-	within330 ±50kHz	680 max.	within4.0 ±2.0dB	30 min.
SFELA10M7DF00-B0	-	10.700	fn±175 min.	950 max.	within3.0 ±2.0dB	20 min.


Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.


(fn) means nominal center frequency.

■ Center Frequency Rank Code


CODE	30kHz Step	25kHz Step			
D	10.64MHz±30kHz	10.650MHz±25kHz			
В	10.67MHz±30kHz	10.675MHz±25kHz			
Α	10.70MHz±30kHz	10.700MHz±25kHz			
С	10.73MHz±30kHz	10.725MHz±25kHz			
E	10.76MHz±30kHz	10.750MHz±25kHz			
Z	Combination A,B,C,D,E				
М	Combina	tion A,B,C			


■ Frequency Characteristics





■ Frequency Characteristics (Spurious)





24


muRata

CERAFIL® Narrow Band Type


SFELA10M7LFTA/KAH0, SFVLA/SFKLA series realizes narrower band characteristics not obtained by conventional ceramic filters. Besides, low spurious and temperature characteristics is stable. This series suits for European car-audio or AM up conversion use that needs narrow band characteristics.



SFKLA10M7NF00-B0











SFVLA10M7LF00-B0








 7.0 ± 2.0



SFELA10M7KAH0-B0



Part Number	Center Frequency (fo) (MHz)	Nominal Center Frequency(fn) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFKLA10M7NF00-B0	10.700 ±15kHz	-	20 min.	95 max.	6.0 max.	24 min.
SFVLA10M7MF00-B0	-	10.700	fn±13 min.	135 max.	within5.5 ±2.5dB	30 min.
SFVLA10M7LF00-B0	-	10.700	fn±25 min.	200 max.	within5.5 ±2.5dB	30 min.
SFELA10M7LFTA-B0	-	10.700	fn±25 min.	280 max.	within7.0 ±2.0dB	30 min.
SFELA10M7KAH0-B0	10.700 ±30kHz	-	within110 ±30kHz	350 max.	within7.0 ±2.0dB	30 min.

Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz]


12.0


10.780

■ Center Frequency Rank Code


CODE	30kHz Step	25kHz Step			
D	10.64MHz±30kHz	10.650MHz±25kHz			
В	10.67MHz±30kHz	10.675MHz±25kHz			
Α	10.70MHz±30kHz	10.700MHz±25kHz			
С	10.73MHz±30kHz	10.725MHz±25kHz			
E	10.76MHz±30kHz	10.750MHz±25kHz			
Z	Combination A,B,C,D,E				
M	Combina	tion A,B,C			

■ Frequency Characteristics





SFVLA10M7LF00-B0




SFELA10M7LFTA01-B0

10.700 Frequency (MHz)


10.740

10.620


10.660





SFELA10M7KAH0-B0





■ Frequency Characteristics (Spurious)











muRata

CERAFIL® For FM -IF Tuners

SFELA10M7 series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.

■ Features

- 1. Little dispersion of amplitude characteristics and phase characteristics (G. D. T. characteristics).
- 2. The SFELA10M7G_X series has G. D. T characteristics and is useful for obtaining low distortion.


 SFELA10M7F_L series, in these ceramic filters, being in harmony with flatness of G. D. T., roundness of the amplitude and selectivity characteristics, therefore, these ceramic filters are suitable to high-grade stereo tuners. Even if mismatching condition, they can keep little distortion because of low Qm of ceramic material. The SFELA10M7FA0G series is based on SFELA10M7FA00/GA00/HA00, and it obtains high selectivity with low loss.

There is little dispersion of amplitude and G. D. T. characteristics, and low distortion rate can be obtained.

3. All products are inspected for symmetry and roundness of amplitude characteristics, and the flatness of G. D. T. characteristics.




SFELA10M7JAXE-B0






SFELA10M7HA0G-B0







SFELA10M7HAXD-B0











Continued on the following page.






Continued from the preceding page.

Bry in S


SFELA10M7GAXA-B0



: Input : Ground : Output


2. F

SFELA10M7FA0G-B0






SFELA10M7GALP03-B0






SFELA10M7GAXX-B0





SFELA10M7FALL-B0




Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)	GDT Bandwidth (kHz)
SFELA10M7JAXE-B0	10.700 ±30kHz	within150 ±30kHz	500 max.	14.0 max.	35 min.	fo±50 min.[within 0.15μsec.]
SFELA10M7HA0G-B0	10.700 ±30kHz	within180 ±40kHz	520 max.	7.0 max.	40 min.	fo±45 min.[within 0.5μsec.]
SFELA10M7HAXD-B0	10.700 ±30kHz	within180 ±30kHz	530 max.	14.0 max.	33 min.	fo±60 min.[within 0.15μsec.]
SFELA10M7GA0G-B0	10.700 ±30kHz	within230 ±50kHz	600 max.	7.0 max.	40 min.	fo±60 min.[within 0.5μsec.]
SFELA10M7GALM-B0	10.700 ±30kHz	within230 ±50kHz	600 max.	within9.0 ±2.0dB	30 min.	fo±60 min.[within 0.25μsec.]
SFELA10M7GAXA-B0	10.700 ±30kHz	within220 ±40kHz	610 max.	12.5 max.	30 min.	fo±80 min.[within 0.15μsec.]
SFELA10M7FA0G-B0	10.700 ±30kHz	within280 ±50kHz	650 max.	within4.0 ±2.0dB	30 min.	fo±85 min.[within 0.5μsec.]
SFELA10M7GALP03-B0	10.700 ±30kHz	within250 ±50kHz	650 max.	10.0 max.	30 min.	fo±65 min.[within 0.25μsec.]
SFELA10M7GAXX-B0	10.700 ±30kHz	within250 ±40kHz	670 max.	12.0 max.	25 min.	fo±110 min.[within 0.2μsec.]
SFELA10M7FALL-B0	10.700 ±30kHz	within280 ±50kHz	700 max.	within7.0 ±2.0dB	25 min.	fo±70 min.[within 0.25μsec.]


Area of Attenuation : [within 20dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.

■ Center Freque	ency Rank	Code
-----------------	-----------	------


	Series Trequency Rank Sout					
CODE	30kHz Step	25kHz Step				
D	10.64MHz±30kHz	10.650MHz±25kHz				
В	10.67MHz±30kHz	10.675MHz±25kHz				
Α	10.70MHz±30kHz	10.700MHz±25kHz				
С	10.73MHz±30kHz	10.725MHz±25kHz				
E	10.76MHz±30kHz 10.750MHz±25kHz					
Z	Combination A,B,C,D,E					
М	Combination A,B,C					

■ Freq. Characteristics







SFELA10M7HAXD-B0








SFELA10M7GALM-B0




SFELA10M7GAXA-B0





Continued on the following page.


Continued from the preceding page.

■ Freq. Characteristics













■ Spurious Frequency












Continued on the following page.


Continued from the preceding page.


■ Spurious Frequency
















CERAFIL® Three-Elements Type SFTLA Series


SFTLA10M7 series for FM-receivers are monolithic type ceramic filters which use the energy trapped thickness vibration-mode of the piezoelectric ceramic.

■ Features

- It has an excellent shape factor, and it is possible to obtain 1.5 times more excellent selectivity than SFELA10M7 series (by detuning +-300 or 400kHz).
- 2. Good performance of spurious suppression.
- 3. Having the same terminal pitch as the SFELA10M7 series, it easily replaces that series.
- 4. By replacing two SFELA10M7 series filters with one SFTLA10M7 filter,more compact sets can be made.
- 5. Well-suited for 1-chip ICs.




SFTLA10M7HA00-B0






SFTLA10M7GA00-B0





SFTLA10M7FA00-B0



Part Number	Center Frequency (fo) (MHz)	3dB Bandwidth (kHz)	Attenuation (kHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
SFTLA10M7HA00-B0	10.700 ±30kHz	within180 ±40kHz	550 max.	within5.5 ±2.5dB	50 min.
SFTLA10M7GA00-B0	10.700 ±30kHz	within230 ±40kHz	650 max.	within6.0 ±2.0dB	50 min.
SFTLA10M7FA00-B0	10.700 ±30kHz	within280 ±50kHz	700 max.	within6.0 ±2.0dB	50 min.

Area of Attenuation : [within 40dB] Area of Spurious Attenuation : [within 9MHz to 12MHz] Center frequency(fo) defined by the center of 3dB bandwidth.


10


■ Center Frequency Rank Code

= center rrequency mank code				
CODE	30kHz Step	25kHz Step		
D	10.64MHz±30kHz	10.650MHz±25kHz		
В	10.67MHz±30kHz	10.675MHz±25kHz		
Α	10.70MHz±30kHz	10.700MHz±25kHz		
С	10.73MHz±30kHz	10.725MHz±25kHz		
E	10.76MHz±30kHz	10.750MHz±25kHz		
Z	Combination A,B,C,D,E			
М	Combination A,B,C			

■ Frequency Characteristics








10.700 Frequency (MHz)


10.500

SFTLA10M7FA00-B0




■ Frequency Characteristics (Spurious)

SFTLA10M7HA00-B0



SFTLA10M7GA00-B0




Continued on the following page.

P61E7.pdf 01.10.17

Continued from the preceding page.

■ Frequency Characteristics (Spurious)


SFTLA10M7FA00-B0



10


Lead Type CERAFIL® Test Circuit and Characteristics Data

■ Test Circuit




 $Rg + R_1 = R_2 = 330\Omega$ C = 10pF (Including stray capacitance and input capacitance of RF voltmeter.)

■ Temperature Characteristics



■ Matching Conditions

- •When using ceramic filters, it is most important to match the input/output load to impedance 330 ohm (only SFELA10M7DF00-B0 is 470 ohm matching). Waveform symmetry is damaged when reactance is added to the input/output load.
- •Two ceramic filters directly connected can be used for high selelctivity. For reducing waveform variation, it is recommended to input a buffer AMP between ceramic filters.





•The SFELA10M7 and SFTLA10M7 series are of input/output symmetric structure so that in theory there is no input/output directionality. Actual circuits may use different input/output loading conditions (for example, mismatched impedance) or capacitance load. In such cases, the waveform will be a little changed by the direction of the input/output of the ceramic filters.

Lead Type CERAFIL® Characteristics Data and Notice

■ Loaded Resistance and Waveform (Rg+R1=330ohm)


SFELA10M7GA00-B0






■ Loaded Capacitance and Waveform (Rg+R1=R2=330ohm)

SFELA10M7GA00-B0





■ Notice (Soldering and Mounting)

The component cannot be withstand washing.

■ Notice (Handling)

- 1. Do not use this product with bend. The component may be damaged if excess mechanical stress is applied to it mounted on the printed circuit board.
- 2. The component may be damaged when an excess stress will be applied.
- 3. All kinds of re-flow soldering must not be applied on the component.
- 4. Do not clean or wash the component as it is not hermetically sealed.
- 5. Do not use strong acidity flux, more than 0.2wt%
- chlorine content, in flow soldering.
- In case of covering discriminator with over coat, conditions such as material of resin, cure temperature, and so on should be evaluated well.
- 7. Accurate test circuit values are required to measure electrical characteristics. It may be a cause of mis-correlation if there is any deviation, especially stray capacitance, from the test circuit in the specification.

Ceramic Filters (CERAFIL®) for FM Receivers




Discriminators Chip Type CDACV Series

CDACV10M7 series forms a resonator on a piezoelectric ceramic substrate. In combination with ICs, this type obtains stable demodulation characteristics in wide bandwidths.

■ Features

- 1. Compact and excellent mechanical strength.
- 2. Can be combined with various ICs. The IC is determined by the last number in the part number.
- 3. Stable demodulation characteristics can be obtained without adjustment.
- 4. The MG type for wide bandwidths and the MC type for narrow bandwidths are available.
- 5. Stable temperature characteristics.
- 6. We recommend kits : ceramic discriminator CDACV10M7 series and "CERAFIL" SFECV10M7 of the same frequency rank.






Part Number	Center Frequency (fo) (MHz)	Recovered Audio 3dB BW (kHz)	Recovered Audio Output (mV)	Distortion (%)	IC	Detection Method
CDACV10M7GA001-R0	10.700 ±30kHz	fo±150 min.	55 min.	1.0 max.	CX20029	Quadrature
CDACV10M7GA016-R0	10.700 ±30kHz	300 min.	within60 to 90mV	0.9 max.	TA8122F	Quadrature
CDACV10M7GA046-R0	10.700 ±30kHz	330 min.	280 min.	1.5 max.	LA1832	Quadrature
CDACV10M7GA069-R0	10.700 ±30kHz	330 min.	80 min.	1.0 max.	CXA1538N	Quadrature
CDACV10M7CA001-R0	10.700 ±30kHz	fo±150 min.	55 min.	1.0 max.	CX20091	Quadrature

■ Center Frequency Rank Code


CODE	30kHz Step	25kHz Step				
D	10.64MHz±30kHz	10.650MHz±25kHz				
В	10.67MHz±30kHz	10.675MHz±25kHz				
Α	10.70MHz±30kHz	10.700MHz±25kHz				
С	10.73MHz±30kHz	10.725MHz±25kHz				
Е	10.76MHz±30kHz 10.750MHz±25kHz					
Z	Combination A,B,C,D,E					
М	Combina	tion A,B,C				


■ Standard Land Pattern Dimensions



■ CDACV10M7GA001-R0









■ CDACV10M7GA016-R0


Test Circuit






■ CDACV10M7GA046-R0

Test Circuit







Continued on the following page.

muRata


Continued from the preceding page.


■ CDACV10M7GA069-R0





■ CDACV10M7CA001-R0





Input signal conditions
Input Level 100dBμ
Mod.Freq. 1000Hz
Freq.Dev. ±22.5kHz

11


Unit R : Ω C : F

Chip Type Discriminators CDACV Series Notice

■ Notice (soldering and mounting)

1. Standard Reflow Soldering Condition

(1) Reflow

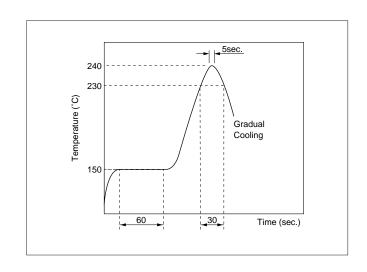

(2) Soldering Iron


Lead terminal is directly contacted with the tip of soldering iron of 280±5°C for 3.0±0.5 seconds.

2. Wash

The component cannot be withstand washing.

■ Notice (handling)

- The component may be damaged if excess mechanical stress is applied to it mounted on the printed circuit board.
- Design layout of components on the PC board to minimize the stress imposed on the warp or flexure of the board.
- After installing chips, if solder is excessively applied to the circuit board, mechanical stress will cause destruction resistance characteristics to lower. To prevent this, be extremely careful in determining shape and dimension before designing the circuit board diagram.
- 4. When the positioning claws and pick up nozzle are worn, the load is applied to the chip while positioning is concentrated to one positioning accuracy, etc. Careful checking and maintenance are necessary to prevent unexpected trouble.
- 5. When correcting chips with a soldering iron, the tip of the soldering iron should not directly touch the chip component. Depending on the soldering conditions, the effective area of terminations may be reduced. the use of solder containing Ag should be done to prevent the electrode erosion.
- 6. Do not clean or wash the component as it is not hermetically sealed.
- 7. In case of covering discriminator with over coat, conditions such as material of resin, cure temperature, and so on should be evaluated well.
- Accurate test circuit values are required to measure electrical characteristics.
 It may be a cause of mis-correlation if there is any deviation, especially stray capacitance, from the test circuit in the specification.

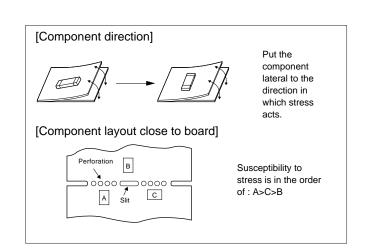

Ceramic Filters (CERAFIL®) for FM Receivers




Discriminators Chip Low-profile Type CDSCA Series

CDSCA10M7 series forms a resonator on a piezo electric ceramic sabstrate. In combination with ICs, this type obtains stable demoduration characteristics in wide bandwidth.

■ Features


- 1. Compact and high reliability and recommended for automotive applications.
- 2. Can be combined with various ICs. The IC is determined by the last number in the part number.
- 3. Stable demoduration characteristics can be obtained without adjustment.
- 4. Stable temperature characteristics.
- 5. Recommended for Pb free soldering.

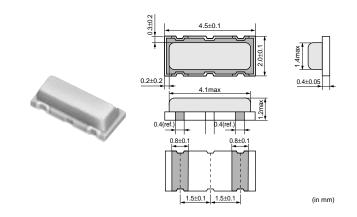

Part Number	Center Frequency (fo) (MHz)	Recovered Audio 3dB BW (kHz)	Recovered Audio Output (mV)	Distortion (%)	IC	Detection Method
CDSCA10M7GF107-R0	10.700 (fn)	fn±80 min.	52 min.	3.0 max.	TA31272F	Quadrature


(fn) means nominal center frequency.

■ Standard Land Pattern Dimensions




(in mm)

■ Test Circuit



■ Frequency Characteristics




Chip Type Discriminators CDSCA Series Notice

■ Notice (Soldering and Mounting)

1. Standard Reflow Soldering Condition

(1) Reflow

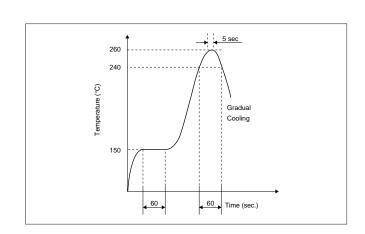

(2) Soldering Iron


Lead terminal is directly contacted with the tip of soldering iron of +280±5°C for 3.0 seconds±0.5 seconds.

2. Wash

The component cannot be withstand washing.

■ Notice (Handling)

- 1. The component mounted on the PCB may be damaged if excess mechanical stress is applied.
- 2. Layout the components on the PCB to minimize the stress imposed by the warp or flexure of the board.
- After installing components, if solder is excessively applied to the circuit board, mechanical stress will cause destruction resistance characteristics to be lower. To prevent this, be extremely careful in determining shape and dimension before designing the circuit board diagram.
- 4. When the positioning claw or pick up nozzle are worn, the excess load is applied to the components while positioning or placing are performed. Careful checking and maintenance are necessary to prevent unexpected trouble.
- 5. When correcting component's position with a soldering iron, the tip of the soldering iron should not directly touch the chip component. Depending on the soldering conditions, the effective area of terminations may be reduced. The use of solder containing Ag should be considered to prevent the electrode erosion.
- 6. Do not clean or wash the component as it is not hermetically sealed.
- In case of overcoating the part, coating conditions such as material, curing temperature, and so on must be evaluated deeply.
- Accurate test circuit values are required to measure electrical characteristics.
 It may be a cause of mis-correlation if there is any deviation, especially stray capacitance, from the test circuit in the specification.

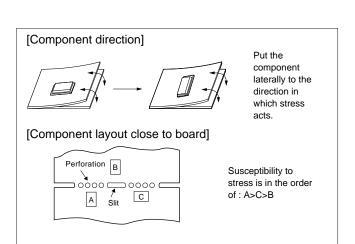

Ceramic Filters (CERAFIL®) for FM Receivers




Discriminators CDALA Series

CDALA10M7 series forms a resonator on a piezoelectric ceramic substrate. In combination with ICs, this type obtains stable demodulation characteristics in wide bandwidths.

■ Features

- 1. Compact and excellent mechanical strength.
- 2. Can be combined with various ICs. The IC is determined by the last number in the part number.
- 3. Stable demodulation characteristics can be obtained without adjustment.
- 4. The MG type for wide bandwidths and the MC type for narrow bandwidths are available.
- 5. Stable temperature characteristics.
- 6. We recommend combination: ceramic discriminator CDALA10M7 series and "CERAFIL" SFELA10M7 of the same frequency rank.



	0.0±1.0	Freq. Rank (Color Dot)
	0.4±0.1 0.65	red. Rank (Color Dot)
CDALA10M7C_ Series	3.0±1.0	(in mm)


Part Number	Center Frequency (fo) (MHz)	Recovered Audio 3dB BW (kHz)	Recovered Audio Output (mV)	Distortion (%)	IC	Detection Method
CDALA10M7GA001-B0	10.700 ±30kHz	345 min.	25 min.	0.6 max.	CX20029	Quadrature
CDALA10M7GA016-B0	10.700 ±30kHz	300 min.	within60 to 90mV	0.9 max.	TA8122F	Quadrature
CDALA10M7GA018-B0	10.700 ±30kHz	300 min.	60 min.	0.9 max.	TA8132N	Quadrature
CDALA10M7GA046-B0	10.700 ±30kHz	330 min.	280 min.	1.0 max.	LA1832	Quadrature
CDALA10M7GA048-B0	10.700 ±30kHz	400 min.	700 min.	1.0 max.	LA1835	Quadrature
CDALA10M7GA092-B0	10.700 ±30kHz	300 min.	60 min.	1.0 max.	TA2132P	Quadrature
CDALA10M7CA001-B0	10.700 ±30kHz	242 min.	35 min.	-	CX20091	Quadrature
CDALA10M7CA005A-B0	10.700 ±30kHz	100 min.	600 min.	6.0 max.	LA7770	Quadrature
CDALA10M7CA040-B0	10.700 ±30kHz	130 min.	40 min.	0.7 max.	TEA5710	Quadrature


■ Center Frequency Rank Code

CODE	30kHz Step	25kHz Step				
D	10.64MHz±30kHz	10.650MHz±25kHz				
В	10.67MHz±30kHz	10.675MHz±25kHz				
Α	10.70MHz±30kHz	10.700MHz±25kHz				
С	10.73MHz±30kHz	10.725MHz±25kHz				
E	10.76MHz±30kHz 10.750MHz±25kHz					
Z	Combination A,B,C,D,E					
М	Combinat	tion A,B,C				

■ CDALA10M7GA001-B0


Test Circuit







■ CDALA10M7GA016-B0


Test Circuit





■ CDALA10M7GA018-B0







Continued on the following page.


Continued from the preceding page.


■ CDALA10M7GA046-B0







■ CDALA10M7GA048-B0





■ CDALA10M7GA092-B0







Continued on the following page.

muRata

Continued from the preceding page.


■ CDALA10M7CA001-B0







■ CDALA10M7CA005A-B0


Test Circuit





■ CDALA10M7CA040-B0





Lead Type Discriminators Notice

■ Notice (Soldering and Mounting)

The component cannot be withstand washing.

■ Notice (Handling)

- Do not use this product with bend. The component may be damaged if excess mechanical stress is applied to it mounted on the printed circuit board.
- 2. The component may be damaged when an excess stress will be applied.
- 3. All kinds of re-flow soldering must not be applied on the component.
- 4. Do not clean or wash the component as it is not hermetically sealed.
- 5. Do not use strong acidity flux, more than 0.2wt%
- chlorine content, in flow soldering.
- In case of covering discriminator with over coat, conditions such as material of resin, cure temperature, and so on should be evaluated well.
- 7. Accurate test circuit values are required to measure electrical characteristics. It may be a cause of mis-correlation if there is any deviation, especially stray capacitance, from the test circuit in the specification.



Packaging

■ Minimum Quantity

■ Minimum Quantity			
Part Number	Taping ø180mm	Ammo Pack	Bulk
SFECV	2,000		
SFECS	2,000		
SFELA		1,500	500
SFELB		1,500	500
SFVLA		1,000	500
SFKLA		1,500	500
SFTLA			500
CDACV / CDSCA	2,000		
CDALA		1,500	500


■ Chip Type CERAFIL®

SFECV Series

User Direction of Feed


Part number marked side is always facing upside. The feeding holes side of cavity tape is always input terminal.

■ Small Chip Type CERAFIL®




■ Chip Type Discriminator

CDACV Series



■ Chip Type Low-Profile Type Discriminator

CDSCA Series




Continued on the following page.



Packaging

Continued from the preceding page.

■ Lead Type CERAFIL® SF_LA Series

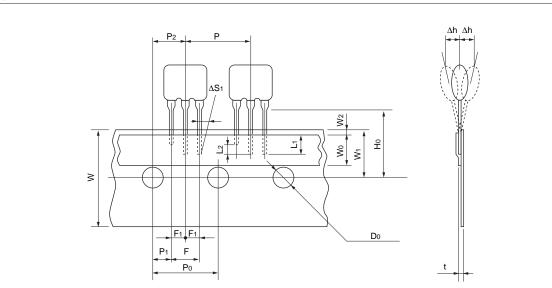

Item	Code	Dimensions	Tolerance	Remarks
Lead Length under the Hold Down Tape	L1	3.0 min.		
Length of Cat off	L2	2.0 max.		To distinguish the direction
Pitch of Components	Р	12.7	±0.5	
Pitch of Sprocket Hole (1)	P ₀	12.7	±0.2	
Length from Hole Center to Lead	P1	3.85	±0.5	
Length from Hole Center to Component Center	P ₂	6.35	±0.5	
Pitch of the Terminal (1)	F	5.0	+0.5 -0.2	
Pitch of the Terminal (2)	F1	2.5	±0.2	
Slant to the Forward or Backward	Δh	0	±1.0	
Slant to the Left or Right	ΔS1	0	±1.0	
Width of Carrier Tape	W	18.0	±0.5	
Width of Hold Down Tape	Wo	6.0 min.		Must not protrude to the carrier tape
Position of Sprocket Hole	W1	9.0	±0.5	
Gap of Hold Down Tape and Carrier Tape	W2	0	+0.5 -0	
Distance Between the Center of Sprocket Hole and Lead Stpper	Ho	18.0	±0.5	
Diameter of Sprocket Hole	D ₀	ø4.0	±0.2	
Total Tape Thickness	t	0.6	±0.2	
Pitch of Sprocket Hole (2)	P020	254.0	±1.5	The pitch of 20 sprocket holes


(in mm)

Continued on the following page.

Packaging

Continued from the preceding page.

■ Lead Type Discriminator CDALA Series

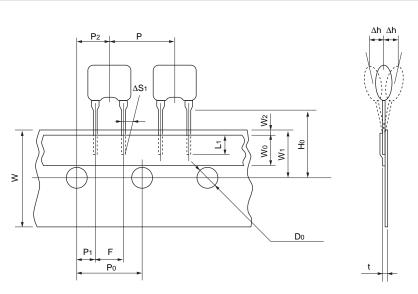


Item	Code	Dimensions	Tolerance	Remarks
Lead length under the hole down tape	L1	3.0 min.		
Pitch of component	Р	12.7	±0.5	
Pitch of sprocket hole (1)	Po	12.7	±0.2	
Length from hole center to lead	P1	3.85	±0.5	
Length from hole center to component center	P2	6.35	±0.5	
Lead spacing	F	5.0	+0.5 -0.2	
Slant to the forward or backward	Δh	0	±1.0	
Slant to the left or right	ΔS1	0	±1.0	
Width of carrier tape	W	18.0	±0.5	
Width of hold down tape	Wo	6.0 min.		
Position of sprocket hole	W1	9.0	±0.5	
Gap of hold down tape and Carrier tape	W2	0	+0.5 -0.0	Hold down tape doesn't exceed the carrier tape
Distance between the center of sprocket hole and lead stopper	Ho	18.0	±0.5	
Diameter of sprocket hole	D ₀	ø4.0	±0.2	
Total tape thickness	t	0.6	±0.2	
Pitch of sprocket hole (2)	Po20	254.0	±1.5	The pitch of 20 sprocket holes

(in mm)

Test Circuit of Ceramic Discriminator

Dort Ni wala	IC Monufacture	10
Part Number	IC Manufacturer	IC
CDALA10M7GA001	Sony	CX20029
CDALA10M7GA002	Sony	CX20076
CDALA10M7GA004	Rohm	BA4234L
CDALA10M7GA005	Rohm	BA4230AF
CDALA10M7GA006	Toshiba	TA7640AP
CDALA10M7GA007	Sanyo	LA1260
CDALA10M7GA008	Toshiba	TA7303P
CDALA10M7GA009	Toshiba	TA7130P
CDALA10M7GA011	Panasonic	AN7004
CDALA10M7GA012	Sony	CXA1030P
CDALA10M7GA013	Panasonic	AN7007SU
CDALA10M7GA014A	Panasonic	AN7006S
CDALA10M7GA015	Sanyo	LA1816
CDALA10M7GA016	Toshiba	TA8122AN/F
CDALA10M7GA017	Philips	TEA5591
CDALA10M7GA018	Toshiba	TA8132AN/AF
CDALA10M7GA019	Rohm	BA1440
CDALA10M7GA020	Philips	NE604
CDALA10M7GF021A	Philips	TBA229-2
CDALA10M7GA022	Sanyo	LA1810
CDALA10M7GA023	Sanyo	LA7770
CDALA10M7GF024	Philips	TDA2557
CDALA10M7GA025	Telefunken	U829B
CDALA10M7GA026	Sanyo	LA1805
CDALA10M7GA027	Sony	CXA1238
CDALA10M7GA027N	Sony	CXA1238N
CDALA10M7GA028	Telefunken	U2501B
CDALA10M7GA029	Philips	TBA120U
CDALA10M7GA030	Philips	TEA5592
CDALA10M7GA031	Toshiba	TA2003
CDALA10M7GA032	Sony	CXA1343M
CDALA10M7GA033	Toshiba	TA2007N
CDALA10M7GA034V	Telefunken	U4490B
CDALA10M7GA035	Philips	TEA5594
CDALA10M7GA036	Toshiba	TA2029
CDALA10M7GA037	Sanyo	LA1830
CDALA10M7GA038	Siemens	TDA6160X
CDALA10M7GA039	Toshiba	TA8186
CDALA10M7GA040	Philips	TEA5710
CDALA10M7GA041	Rohm	BA4220
CDALA10M7GA042	Philips	SA605
CDALA10M7GA043	Sanyo	LA1831
CDALA10M7GA044	Siemens	TDA6160-2X
CDALA10M7GA045	Toshiba	TA2008A/AN
CDALA10M7GA046	Sanyo	LA1832/M
CDALA10M7GA047	Philips	SA626
CDALA10M7GA048	Sanyo	LA1835/M
CDALA10M7GA049	Motorola	MC13156
CDALA10M7GA050	Toshiba	TA2022
CDALA10M7GA051	Siemens	TDA1576T
CDALA10M7GA052	Motorola	MC13173
CDALA10M7GA053	Panasonic	AN7232
CDALA10M7GA054	Sony	CXA1376AM
CDALA10M7GA055	Philips	TEA5712T
CDALA10M7GA055	NEC	
CDALA10M7GA056 CDALA10M7GA057		μPC1391M
	Toshiba	TA2057
CDALA10M7GA058	Toshiba	TA2046
CDALA10M7GA059	Samsung	KA2244
CDALA10M7GA060	Rohm Philips	BA1448
CDALA10M7GA061		TEA5762/5757

Part Number	IC Manufacturer	IC	
CDALA10M7GF062	Toko	TK14581	
CDALA10M7GA063	Samsung	KA2292	
CDALA10M7GA064	Samsung	KA2295	
CDALA10M7GA065	Samsung	KA2298	
CDALA10M7GA066	Rohm	BA4110	
CDALA10M7GA067	Rohm	BA4240L	
CDALA10M7GA068	Sony	CXA1991N	
CDALA10M7GA069	Sony	CXA1538M/N/S	
CDALA10M7GA070	Sanyo	LA1150	
CDALA10M7GA071	Toshiba	TA7765	
CDALA10M7GF072	Toshiba	TA31161	
CDALA10M7GA073	Motorola	MC13158	
CDALA10M7GA075	Sony	CXA1611	
CDALA10M7GA076	Sony	CXA3067M	
CDALA10M7GA077	Toshiba	TA2111	
CDALA10M7GA078	Sony	CX1691M	
CDALA10M7GA079	Sanyo	LA1838/M	
CDALA10M7GA080	Toshiba	TA2104AFN	
CDALA10M7GA080A	Toshiba	TA2104F	
CDALA10M7GA081	Telefunken	U4313B	
CDALA10M7GA082	Toshiba	TA2099N	
CDALA10M7GA083	Sanyo	LA1827	
CDALA10M7GA084	Rohm	BH4126FV	
CDALA10M7GA085	Philips	SA639	
CDALA10M7GA086	Sanyo	LA1833	
CDALA10M7GA087	Motorola	MC3363	
CDALA10M7GA088	Toshiba	TA8721ASN	
CDALA10M7GA089	Samsung	KA22425	
CDALA10M7GA090	Samsung	KA22901	
CDALA10M7GA091	Samsung	KA2297	
CDALA10M7GA092	Toshiba	TA2132	
CDALA10M7GA092D	Toshiba	TA2132BP	
CDALA10M7GA093	Sony	CXA1111	
CDALA10M7GA094	Sanyo	LA1822	
CDALA10M7GA095	Temic	U2765B	
CDALA10M7GA096	Philips	SA636DK	
CDALA10M7GA097	Matsushita	AN6138SH	
CDALA10M7GA098	Philips	CAA3220TS	
CDALA10M7GA100	Toshiba	TA2149N	
CDALA10M7GA100A	Toshiba	TA2149AN	
CDALA10M7GA101	Sanyo	LA1823	
CDALA10M7GA102	Toshiba	TA2142FN	
CDALA10M7GA103	Samsung	KB22902	
CDALA10M7GA104	Rfmd	RF2925	
CDALA10M7GA105A	Philips	TEA5757HL	
CDALA10M7GA106	Fujitsu	MB15G611	
CDALA10M7GF107	Toshiba	TA31272FN	
CDALA10M7GF108A	Sanyo	LA1225M	
CDALA10M7GF109	Toko	TK14588	
CDALA10M7GA110	Dspg	DS9RF21	
Dart Number	IC Manufacture	IC	
Part Number	IC Manufacturer		
CDALA10M7CA001	Sony	CX20091	
CDALA10M7CA002	Toshiba	TA7687P/F	
CDALA10M7CA004A	Motorola	MC3356P	





Example of Appllied Circuit


■ CXA1019M(Radio) FM CERAFIL® CERAMIC DISCRIMINATOR (SFELA10M7FA00-B0) (CDALA10M7CA001-B0) FM/AM BAND SELECT FM DISCRI 19 METER REG OUT FM BPF TUNING METER RIPPLE FILTER FRONT END AM ANT CXA1019M(SONY) 23 DEP 21 OUT # AM OSC AM CERAFIL® (SFULA455KU2B-B0) <u></u>↓VOL No adjustment is needed the FM detection stage due to use the ceramic discriminator.

Continued on the following page.

Example of Appllied Circuit

Continued from the preceding page.

■ TA8122F(Radio)

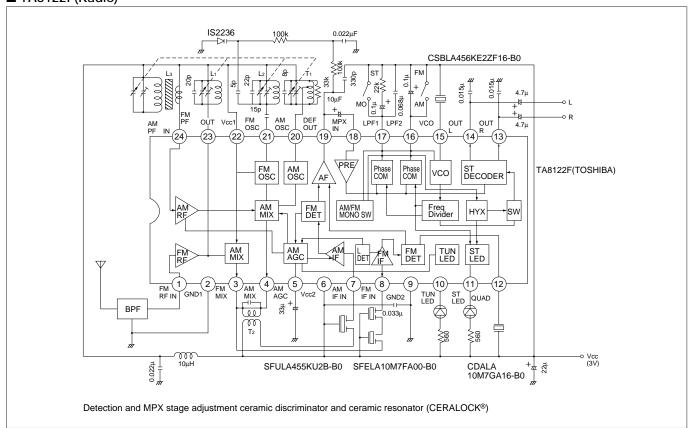

⚠ Note:

- 1. Export Control
- ⟨For customers outside Japan⟩

Murata products should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destructive weapons (nuclear weapons, chemical or biological weapons, or missiles), or any other weapons. $\langle For\ customers\ in\ Japan \rangle$

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required

- 2. Please contact our sales representatives or product engineers before using our products listed in this catalog for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property, or when intending to use one of our products for other applications than specified in this catalog.
- 1 Aircraft equipment
- 2 Aerospace equipment ③ Undersea equipment
- 4 Power plant equipment
- Medical equipment
 Transportation equipment (vehicles, trains, ships, etc.) 7 Traffic signal equipment
- ® Disaster prevention / crime prevention equipment
- 9 Data-processing equipment
- ① Application of similar complexity and/or reliability requirements to the applications listed in the above
- 3. Product specifications in this catalog are as of May 2001. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before your ordering. If there are any questions, please contact our sales representatives or product
- 4. Please read CAUTION and Notice in this catalog for safety. This catalog has only typical specifications. Therefore you are requested to approve our product specification or to transact the approval sheet for product specification, before your ordering.
- 5. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or third party's intellectual property rights and other related rights in consideration of your using our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
- 6. None of ozone depleting substances (ODS) under the Montreal Protocol is used in manufacturing process of us.



http://www.murata.co.jp/products/