

For office use only

T1 _____

T2 _____

T3 _____

T4 _____

Team Control Number

6406

Problem Chosen

A

For office use only

F1 _____

F2 _____

F3 _____

F4 _____

2010 Mathematical Contest in Modeling (MCM) Summary Sheet

Summary

Firstly, the “sweet spot” on a bat is defined as the very spot where the maximum power is transferred to the ball in the collision process.

In order to locate the sweet spot of a bat, we model the bat approximately as a rigid, free object and the ball as a linear spring with friction in collision process which is considered as an one-dimensional problem. This is our basic model, in which the exit velocity of the ball is a function of some factors, including masses of ball and bat, centers of those masses, moment of inertia of the bat, initial velocity of the ball and the bat, coefficient of restitution and the location of impact point. With specific values of these factors given, the exit speed of ball is only an explicit function depended on the location of impact point. A graph drawn by MATLAB® shows the relationship between exit velocity of the ball and location of the impact point. Since the peak point of the curve in the graph is not corresponding to the end of the bat, we draw a conclusion that sweet spot is not located at the end of the bat. After this, an additionally physical explanation is put forward.

In order to predict the effect of “corking” more accurate, the vibration of bat is taken into account and then a generalized model is proposed. Here *finite element method* is used to study the vibration of the whole bat, and an effective coefficient of COR is given to describe the energy dissipation of the vibration of bat. Then we obtain an improved formula to describe the relationship of factors above. According to the new formula, a comparison graph on the normal bat and the corked bat is plotted. By this graph, we can conclude that corking does not enhance “sweet spot” effect, while it is prolonged the reaction time and easier for batter to control bat. This answers why corking is forbidden. A more detailed physical explanation is presented in this report.

The augmented model is used to predict the behavior of wood and metal bat. With experimental data of parameters for ash and aluminum bats, we draw a figure of exit velocity of ball corresponding to the location of the impact point. By this figure and the discussion of energy’s transfer process, we find that there are some significant different behaviors between the wood bat and the metal bat. It shows that the metal bat outperforms the wood one remarkably. This is the main reason for the prohibition of metal bats.

Dynamic Model of “Sweet Spot Effect”

Contents

1	Introduction	1
2	Definitions	1
3	Assumptions	2
4	Symbols	2
5	Model for Bat-ball Collision	3
5.1	Calculation for the maximum power point	3
5.2	Conclusion	5
5.3	The Physical Explanation	6
5.4	Advice to the Batter	6
6	Augmented Model of Collision	6
6.1	Model of Bat with Vibration	6
6.2	Model of the Ball	9
6.3	Model of Collision	10
6.4	Calculation by Energy Conservation	11
6.5	The Exit Speed of the Ball	12
6.6	Comparison of Normal and Corked Bat	12
6.7	Physical Explanation	13
6.8	Reason for Prohibition of Corking	14
6.9	Conclusion	14
7	Wood vs Aluminum Bat	14
7.1	Differences in Parameters	14
7.2	Calculation and Analysis	15
7.3	Conclusion	15
8	Strengths and Weaknesses	16
8.1	Strengths	16
8.2	Weaknesses	16

1 Introduction

The game of baseball has a certain fascination for physicists. There have been numerous papers in the literature addressing a wide variety of issues amenable to a physics calculation.

In all the studies, the hottest areas include the standardization of the game and its equipments; the aerodynamics of a spinning baseball; the peculiar behavior of the knuckleball; the coefficient of restitution of a baseball and its effect on the bounce of the ball off the bat; and the dynamics of the ball-bat collision and sweet spot. It is this latter topic that is the subject of this paper.

Given the popularity of baseball and the natural curiosity of physicists to understand collision phenomena, it is surprising that very few measurements have ever been made on the behavior of a baseball bat when it impacts with a ball.

Most of the studies on ball-bat collision is experimental, mainly because precisely theoretical study of the collision process is very difficult. The collision can be very violent, and the impact time is very short, resulting in the complexity of the problem.

There are some theoretical on ball-bat collision, most of which are based on values of parameters obtained from previous experimental study. It is impossible to do study totally independent of experiments on such a practical problem, although only principles of classical mechanics is involved.

Alan M. Nathan, Van Zandt and H. Brody have done a lot of studies on baseball, and on the collision model. R. K. Adair published a popular book discussing the physics of baseball in all. Our study here is mainly conducted on the basis of their research, also contains many others' work.

2 Definitions

Definition 1 Sweet Spot :

The "sweet spot" on a bat is defined as the very spot where the maximum power of the collision system is transferred to the ball in the collision process.

Definition 2 Center of Percussion (COP) :

A point conjugate to the point on the handle where the bat is held. A ball that strikes the stationary bat between the COP and the handle tends to drive the handle in the direction of the ball's motion. A ball that strikes the end of the bat beyond the COP tends to drive the handle forward, opposite to the direction of the ball. A ball that strikes the COP has no effect on the handle.

Definition 3 Coefficient of Restitution (COR) :

The ratio of the velocity of the ball rebounding from the surface of a hard, immovable object to its incident velocity. Consequently, the COR is equal to the square root of the proportion of the collision energy returned to the kinetic energy of the ball's flight. We use COR of the bat-ball collision so as to take into account the loss of mechanical energy in the inelastic collision

3 Assumptions

1. The bat is rigid, so there is no vibration in the bat(for the basic model).
2. The ball hit and rebound perpendicular to the bat and is in the plane of the swing.
3. The ball can be considered as a linear spring with friction.
4. The bat is a free object in collision, and both ends of the bat is completely free.
5. The vibration of the bat is harmonic(for augmented model).

4 Symbols

symbols	definitions
v_i	velocity of ball before collision
v_f	velocity of ball after collision
V_f	velocity of bat after collision
S	the shear modulus the bat
Y	Youngs modulus of the bat
ρ	the density of the bat
A_i	cross-sectional area of each slices of the bat
Δz	the thickness of each segment of the bat
$y_i(z)$	the transverse displacement of each segment of the bat
ϕ	orientation of each segment of the bat
Φ	$\Phi_i = \phi_i \Delta z$
I_i	area moment of inertia of slice i (about an axis passing through the center of mass of the slice and normal to the $y - z$ plane)
b	the distance between the impact point and CM
m	mass of the ball
M	mass of the bat
e_0	Coefficient of restitution (COR), defined as $e_0 \equiv v_{rel,f}/v_{rel,b}$

5 Model for Bat-ball Collision

When a ball strikes a baseball bat held firmly by the hands, the bat transfers vibrational energy to the hands, and the hands exert an impulsive reaction force on the handle. This force is usually neglected when modeling the dynamics of the collision, since it is usually assumed that the ball will leave the bat before the impulse is transmitted to the hands [1][2][3]. It is probably better to treat the bat as a free-body, rather than an object clamped at one end.

The force between the ball and bat in the collision process can be very large, while the gravity is so small that it is negligible. For a long home run, the force on the ball reaches a value of near 9000 pounds[4].

The collision is simplified as a moving free object collides with a spring with friction.

5.1 Calculation for the maximum power point

For this part of the calculation, we follow nearly exactly the work of H.Brody[2], who calculate the maximum power point of ball-bat collision.

it is assumed that the ball hit and rebound perpendicular to the bat and is in the plane of the swing.

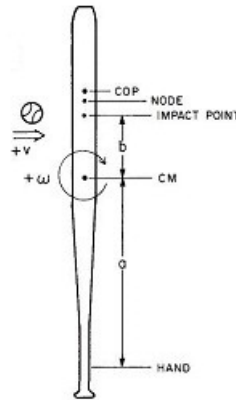


Figure 1: location of point

The three equations below come from conservation of linear momentum, conservation of angular momentum, and the definition of coefficient restitution. The angular velocity ω is taken about the bat CM and clockwise is defined as positive, as shown in Fig.1 This is all in the frame of reference moving with the initial velocity of the CM of the bat and the bat is considered a free-body.

$$m \cdot v_i = m \cdot v_f + M \cdot V_f \quad (1)$$

$$b \cdot m \cdot v_i + I \cdot \omega_i = b \cdot m \cdot v_f + I \cdot \omega_f \quad (2)$$

$$e_0 \cdot (v_i - \omega_i \cdot b) = V_f + \omega_f \cdot b - v_f \quad (3)$$

Where m and M are the ball and bat mass, v and V are the ball and bat velocity(initial and final), ω is the bat angular velocity(initial and final), and e is the coefficient of restitution.

Here, we use COR of the bat-ball collision so as to take into account the loss of mechanical energy in the inelastic collision.

Solving these three equations for v_f by eliminating V_f and ω_f gives

$$v_f = v_i - \frac{(1 + e_0) \cdot (v_i - \omega_i \cdot b)}{1 + m/M + (m \cdot b^2/I)} \quad (4)$$

Note that when $\omega_i = 0$, this expression is a function of b^2 , so it must have an extremum (maximum in this case) at $b = 0$, the center of mass of the bat. This is, of course, expected, since if the bat has no initial rotational energy, a hit at the CM will give it no final rotational energy.

To find the value of b which maximizes v_f in the general case, the expression for v_f is differentiated with respect to b and set the result equal to zero.

$$\omega_i \cdot b^2 - 2v_i \cdot b - [\omega_i \cdot (M + m) \cdot I]/(m \cdot M) \quad (5)$$

Solve this equation, we can get b :

$$b = \frac{v_i}{\omega_i} \pm \sqrt{\left(\frac{v_i}{\omega_i}\right)^2 + I \frac{m + M}{m \cdot M}} \quad (6)$$

Since v_i/ω_i is negative, the $+$ sign is to be used here on the square root. The values of m , M , and I are easy to obtain in the lab, while the value of ω_i and v_i are determined by the hitter swinging the and the pitcher throwing the ball.

By then, the calculation of the location of the maximum power spot by the model is finished. we can get that the location b is a function of ball/bat velocity ratio, the masses of ball and bat, and the moment of inertia of the bat with respect to CM. the value of b varies by these parameters. The final velocity of the ball in the collision v_f varies by the impact point location b is drawn a graph with values obtained from experiments.

So it is obvious that maximum power spot is not at the end of the bat.

5.2 Conclusion

On the foundation of the collision model, we can draw a conclusion that the location of sweet point is a function of ball/bat velocity ratio, the masses of ball and bat, and the moment of inertia of the bat with respect to CM, and it varies by these parameters. As shown in fig.2, sweet spot do not locate on the end of a bat, but locate on a point that has a certain distance to the end.

It is quite instructive to see how b varies with each of these variables. Consider if

$$I \cdot (m + M) \cdot \omega_i^2 / (M \cdot m) \cdot v_i^2 < 1$$

the square root can be expanded and the result is

$$b = [(r + 1) \cdot \omega_i \cdot k^2] / v_i$$

where $r = M/m$ and I has been replaced by $M \cdot k^2$.

This means that b , the distance from the CM of the bat to the impact point of the ball, increases as the mass of the bat increases, increases as the moment of inertia of bat increases, and increases the more "wristy" is the swing.

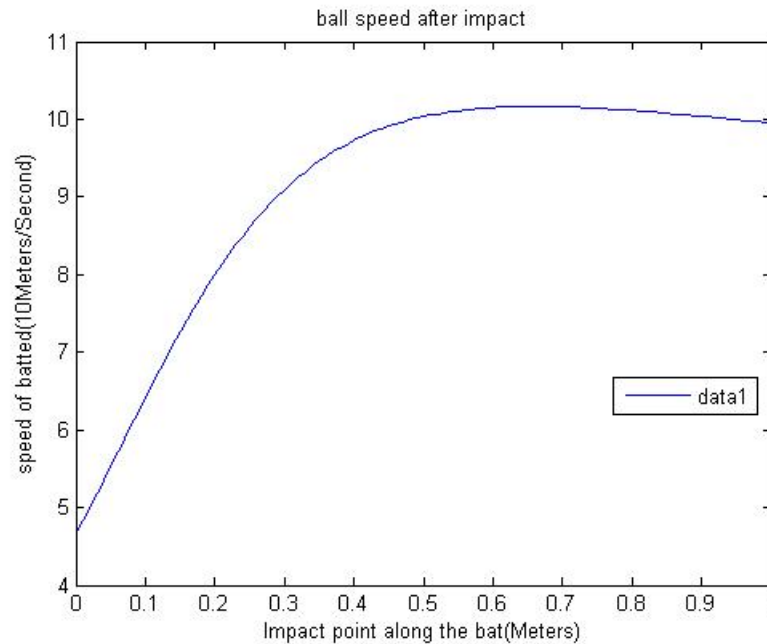


Figure 2: final velocity v_f varies by impact point location b

5.3 The Physical Explanation

Even though the velocity at the end of the bat is the largest, but the speed of batted ball is also determined by the quantity of mass near the impact point. In the end of the bat, the quantity of mass nearby is almost half less since one side of the point is of no mass at all. To gain a balance of the bat velocity and quantity of mass nearby, it's acceptable that sweet spot locate not at the end, but a certain distance to the end.

5.4 Advice to the Batter

1. You should hit a fast pitch closer to your hands for maximum power and you should try to hit a slow pitch further out on your bat to get best results.
2. With a larger bat/ball mass ratio (hardball) hit the ball out further from the CM, and with a smaller bat/ball mass ratio (softball) hit it closer to your hands.

6 Augmented Model of Collision

In the model above, we assumed that the bat is rigid and the vibration of the bat was neglected. While actually, for the force in collision is very large (can reach 9000 pounds for a home run[4]), both the ball and the bat will be distorted, and there must be vibration in the bat. In order to establish a more precise model in this part, the assumption of “rigid bat” is abandoned, and the vibration of the bat is taken into account. So the model of bat will be modified following. Then the model for collision is sure to be modified, while the model for the ball almost remains the same except that some of the expressions is displaced.

For this part of the calculation, we follow the model of Alan Nathan[5], with some improvement in the model of the ball according to the measurement of Kirkpatrick[6].

6.1 Model of Bat with Vibration

We start with Fig.3, where we show schematically a baseball bat that has been distorted from its equilibrium shape due to bending and shearing .

We divide the bat into N parallel slices of circular cross section, each of thickness Δz and each elastically coupled to its neighbors through the Young's modulus Y and the shear modulus S . The distortion of each particular segment of the bat can be characterized by its transverse displacement $y(z)$ and orientation $\phi(z)$ as a function of its coordinate z along the long axis of the bat.




Figure 3: Schematic representation of a bat that is bent and sheared.

Based on the work of Van Zandt[3] and Alan Nathan[5], we arrive at:

$$\ddot{y}_i = \frac{S}{\rho \Delta z^2} [(y_{i+1} + y_{i-1} - 2y_i) + \frac{A_i - A_{i-1}}{A_i} (y_i - y_{i-1} + \Phi_{i-1}) + (\Phi_i - \Phi_{i-1})] \quad (7)$$

$$\begin{aligned} \ddot{\Phi}_i &= \frac{Y}{\rho \Delta z^2} [(\Phi_{i+1} + \Phi_{i-1} - 2\Phi_i) + \frac{I_i - I_{i-1}}{I_i} (\Phi_i - \Phi_{i-1})] \\ &\quad - \frac{S}{\rho I_i} [A_i(y_{i+1} - y_{i-1} + \Phi_i + \Phi_{i-1}) \\ &\quad - (A_i + A_{i-1})(y_i + y_{i-1} + \Phi_{i-1})] \end{aligned} \quad (8)$$

where ρ , A_i , and I_i are the density, cross-sectional area, and area moment of inertia of slice i (about an axis passing through the center of mass of the slice and normal to the $y - z$ plane), respectively, and $\Phi_i = \phi_i \Delta z$.

For solid bats (such as a typical wood bat), a slice of radius R_i has

$$\begin{cases} A_i = \pi R_i^2 \\ I_i = \pi R_i^4 / 4 \end{cases} \quad (9)$$

We assume that ρ , Y , and S are uniform (independent of i).

We complete the statement of the problem by specifying the boundary conditions. It is assumed that both ends of the bat are completely free[7], meaning that the force and torque on the end slices are due only to the next inner slices.

In order to find the normal modes of the bat implied by our equations of motion, we assume harmonic vibrations, so that

$$\begin{cases} \ddot{y}_i = -\omega^2 y_i \\ \ddot{\Phi}_i = -\omega^2 \Phi_i \end{cases} \quad (10)$$

Then Eqs. 7 and 8 can be rewritten in a compact matrix notation as

$$H\psi = -\omega_n^2$$

where

$$\psi \equiv \begin{pmatrix} y_{n1} \\ \vdots \\ y_{nN} \\ \Phi_{n1} \\ \vdots \\ \Phi_{nN} \end{pmatrix}$$

is a $2N$ -element column matrix and H is a nonsymmetric $2N \times 2N$ matrix. One immediately recognizes this as an eigenvalue problem, requiring the diagonalization of H in order to find the normal mode frequencies ω_n and associated eigenvectors ψ_n .

The lowest two modes are zero-frequency rigid body modes corresponding to uniform translation (y_{ni} independent of i , $\phi_{ni} = 0$) and uniform rotation (y_{ni} linear in i , ϕ_{ni} independent of i).

In the presence of a time-dependent external force on the i th slice, an additional term $F_i(t)/(\rho A_i \Delta z)$ appears on the right-hand-side of Eq. 7. Since the normal modes of the free vibration form a complete set, we write the solution as an expansion

$$y_i(t) = \sum_n a_n(t) y_{ni}$$

so that

$$\sum_n (\ddot{a}_n(t) + \omega_n^2 a_n(t)) y_{ni} = \frac{F_i(t)}{\rho A_i \Delta z} \quad (11)$$

Using the orthogonality of the eigenstates,

$$\sum_I A_i y_{mi} y_{ni} \Delta z = \bar{A} \delta_{mn}$$

which defines \bar{A} , we project out the m th mode to arrive at

$$\ddot{a}_m(t) + \omega_m^2 a_m(t) = \frac{1}{\rho \bar{A}} \sum_i F_i(t) y_{mi} \quad (12)$$

In the ball-bat collision, the driving force $F_i(t)$ is the force that the ball and bat mutually exert on each other. We next turn to a discussion of the ball and a model for the force.

6.2 Model of the Ball

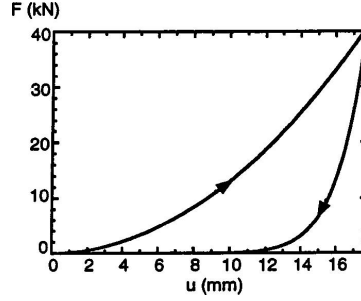


Figure 4: Schematic representation of a bat that is bent and sheared.

The baseball-bat collision is violent and involves large forces which act over a very short time and which compress the ball to a fraction of its normal size.

with an equal reactive force on the bat. Such forces distort bat and ball: The ball is compressed to about half of its original diameter, the bat is compressed about 1/25 as much[4].

The collision is highly inelastic, with 65% of the energy is lost to friction, found in the static measurements of Kirkpatrick designed to address the ball-bat collision[6].

The phenomenological embodiment of this inelasticity is the coefficient of restitution, which we denote by the symbol e_0 . It is defined as the ratio of relative speeds after to before the collision of the ball with a perfectly rigid object:

$$\text{coefficient of restitution : } e_0 \equiv \frac{v_{rel,f}}{v_{rel,b}} \quad (13)$$

With this definition, the fraction of the initial center of mass energy that is dissipated equals $1 - e_0^2$.

The process of collision can be understood with the help of the dynamic stress-strain hysteresis curve shown in Fig.4, in which the path taken during the compression phase is different from that taken during the expansion phase. The area bounded by the two curves is the energy dissipated

$$E_{lost} = \oint F(u) du \quad (14)$$

Defining u as the compression of the radius of the ball, we parametrize the hysteresis curve as compression:

$$\begin{cases} \text{compression : } F(u) = k_1 u^\alpha \\ \text{expansion : } F(u) = k_2 u^\beta \end{cases} \quad (15)$$

where generally $\beta \geq \alpha$. Since the fractional energy loss is $1 - e_0^2$, Eqs.14 and 15 lead to

$$\beta = \frac{1 + \alpha}{e_0^2} - 1 \quad (16)$$

The parameter k_2 is determined from the remaining parameters by equating the two expressions for the force at the point of maximum compression. Our model therefore has three parameters: the compression constant k_1 , the compression exponent a and e_0 . The parameter k_1 essentially sets the overall time scale for the collision, whereas a determines the variation of the collision time with initial impact speed. For a linear spring ($\alpha = 1$) with no losses, the collision time is half of the oscillation period of the spring independent of the impact speed, whereas for $a > 1$ the collision time decreases with increasing impact speed.

6.3 Model of Collision

We are now in a position to formulate the collision problem.

We assume that the ball impacts the bat on the k th slice. The formalism could easily be generalized to allow for a force spread over several slices. The force that the ball and bat mutually exert on each other depends on the compression of the radius of the ball according to Eq.15. We take u to be the separation between the surface of the bat $y_k(t)$ and the center of the ball $y_{ball}(t)$ but offset by the natural radius R_{ball} so that $u = 0$ corresponds to no compression. As discussed in the preceding section, the functional form of that force depends on whether the spring is compressing ($\dot{u} < 0$) or expanding ($\dot{u} > 0$). Putting all this together, the complete dynamics of the collision are contained in the equations

$$y_i \ddot{t} = \sum_n a_n(t) y_{ni} \quad (17)$$

$$\ddot{a}_m(t) + \omega_m^2 a_m(t) = \frac{1}{\rho A} \sum_i F_i(t) y_{mi} \quad (18)$$

$$m_{ball} \ddot{y}_{ball} = -F(u(t)) \quad (19)$$

$$u(t) = R_{ball} - (y_{ball}(t) - y_k(t)) \quad (20)$$

Together with the normal modes, the force law, and the initial conditions. For the latter, we take $t = 0$ to be the time when the ball and bat come into contact for the first time $u = 0$, $\dot{u} < 0$, at which time the ball and the rigid-body modes of the bat each have initial velocities which must be specified. Under typical conditions, the ball and bat (at the impact point) are initially moving in opposite directions. Since the bat is assumed not to be vibrating prior to the collision, we set $a_n(0) = \dot{a}_n(0) = 0$ for

the true vibrational modes. Standard fourth-order Runge-Kutta is used to integrate the coupled differential equations numerically, using a time grid adjusted to give stable results. For a typical collision lasting less than 1 ms, a mesh of $5\mu s$ is more than adequate. When the ball and bat separate ($u = 0, \dot{u} = 0$) the force goes to zero, the bat vibrates freely, and the ball exits with constant velocity v_f .

6.4 Calculation by Energy Conservation

The total energy conserves in the whole process of collision between the ball and the bat. That is, once the ball and bat separate, the initial kinetic energy of the ball-plus-bat system is shared among the final kinetic energy of the ball, the energy contained in rigid-body modes (translation and rotation) of the bat, vibrational energy of the bat, and energy lost in the compression and expansion of the ball. It is useful to develop some formulas for the partitioning of the energy of the bat among the normal modes. The energy contained in the n th vibrational mode is given by

$$E_n = \frac{1}{2} \rho \bar{A} (\dot{a}_n^2 \tau + \omega_n^2 a_n^2(\tau)) \quad (21)$$

where t is the collision time. We define the force profile $\mathcal{F} \equiv F/\mathcal{I}$, where \mathcal{I} is the total impulse imparted to the ball in the collision, so that

$$\int_0^\tau \mathcal{F}(t) dt = 1$$

Assuming $a_n(0) = \dot{a}_n(0) = 0$, the solution to Eq. 19 can be written

$$a_n(\tau) = \frac{y_{nk} \mathcal{I}}{\rho \bar{A} \omega_n} \int_0^\tau \mathcal{F}(t) \sin \omega_n(\tau - t) dt$$

from which we derive

$$E_n = \frac{\mathcal{I}^2}{2m_{ball}} R_n \quad (22)$$

$$R_n = \left[\frac{y_{nk}^2 m_{ball}}{\rho \bar{A}} \right] g(\omega_n) \quad (23)$$

$$g(\omega_n) \equiv \left| \int_0^\tau (t) e^{i\omega_n t} dt \right|^2$$

These equations define R_n , which is a dimensionless parameter that is proportional to the energy transferred to the n th normal mode as a result of the collision.

In general, one can interpret R_n as the ratio of ball mass to an effective bat mass. It depends in part on the squared amplitude of the mode at the impact point (y_{nk}^2).

6.5 The Exit Speed of the Ball

Our goal is to calculate the exit speed of the ball v_f . We will find it useful to develop some formulas relating v_f to the initial speed of the ball v_{ball} and the initial speed of the bat at the impact point v_{bat} . We do this first for a rigid bat. We proceed by eliminating all but the two zero-frequency rigid-body modes, which correspond to the recoil of the center of mass of the bat and the rigid rotation of the bat about its center of mass. The calculation of R for these modes is straightforward, resulting in

$$R_0 = \frac{m_{ball}}{M} [1 + (\frac{z_k - z_{CM}}{r_\gamma})^2] \quad (24)$$

where z_k is the location of the k th slice (the impact point) and r_γ is the radius of gyration ($I_{CM} = Mr_\gamma^2$). We easily arrive at rigid approximation:

$$v_f = [\frac{e_0 - R_0}{1 + R_0}]v_{ball} + [\frac{e_0 + 1}{1 + R_0}]v_{bat} \quad (25)$$

This result is expected to be valid whenever the energy contained in vibrations is small, such as when the impact point is close to one or more nodes of the lowest-frequency modes. This formula conserves momentum and angular momentum and energy.

We attempt to generalize this result for the case in which vibrations are included. We start with the simple case in which there are vibrations in the bat but no dissipation in the ball (i.e., $e_0 = 1$). Under such conditions, one can rigorously show that the correct formula for the exit speed of the ball is given by

$$e = 1 : v_f = [\frac{1 - \sum_n R_n}{1 + \sum_n R_n}]v_{ball} + [\frac{2}{1 + \sum_n R_n}]v_{bat} \quad (26)$$

Where the sum is over all the normal modes (rigid and vibrational), The most general case can be cast in the form general case:

$$\text{general case : } v_f = [\frac{e_{eff} - R_0}{1 + R_0}]v_{ball} + [\frac{e_{eff} + 1}{1 + R_0}]v_{bat} \quad (27)$$

whereas e_0 is the coefficient of restitution for the collision of the ball with a rigid surface and therefore it's a property of the ball alone, e_{eff} is an effective coefficient of restitution for the collision of the ball with a flexible bat. The effective coefficient of restitution has the desired properties that it reduces to e_0 in the limit that vibrations are neglected and it satisfies the definition of coefficient of restitution.

6.6 Comparison of Normal and Corked Bat

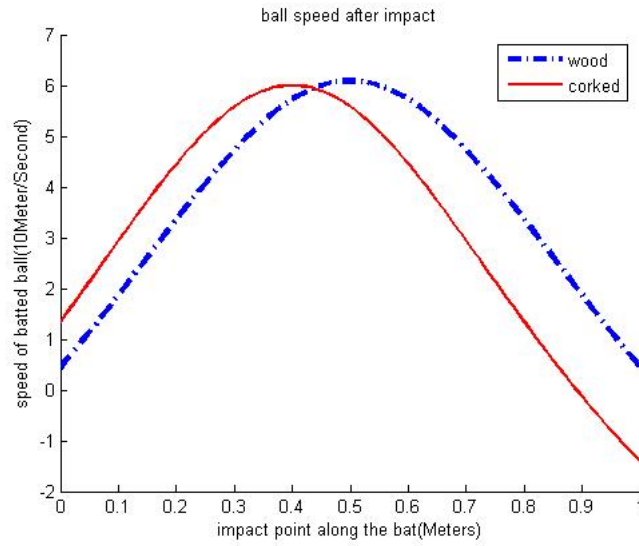


Figure 5: v_f varies by location of impact point of normal and corked bat

Table 1: Properties of bat

	normal bat	corked bat
mass	0.846 kg	0.800 kg
length	0.84 m	0.84 m
distance of CM from handle	0.51 m	0.40 m
moment of inertia about CM	$0.047 \text{ kg} \cdot \text{m}^2$	$0.040 \text{ kg} \cdot \text{m}^2$
effective COR e_{eff}	0.40	0.40

A graph of Eq.27 was drawn with data measured by H.Brody[7] listed in Table.1. The curve of the equation are showed in Fig.5. The effective COR are setted to equal value, for there are few changes in effective COR (e_{eff}) caused by corked bat according to Alan Nathan' experiment[8].

It is obvious from Fig.?? that the maximum v_f of corked bat is slightly less than that of a normal bat, which improves that corking bat does not enhances the “sweet spot” effect in terms of velocity increasement.

6.7 Physical Explanation

The main influence in v_f caused by corking a bat is the value of mass and location of center of mass, suppose that we always hit the ball at sweet point. The bat shakes slightly when hitting at the sweet point, and there's little energy dissipation in vibration energy of the bat.

The corked bat has a better flexibility, but integrity of the bat is lost.

6.8 Reason for Prohibition of Corking

Since corking doesn't enhance "sweet spot" effect, then how does unfairness come?

1. Reaction time of the batter is prolonged for the velocity of the bat can be larger. Since moment of inertia of the bat with respect to the handle point is reduced by corking, the bat can be swung faster with the same force. So the batter will have more time for reaction and control of the bat, thus the batter can have a better performance with the same skill.
2. The bat is easier for the batter to control since the mass is reduced.

So the corked bat has a beneficial effect for a contact-type hitter, who is just trying to meet the ball squarely rather than get the highest batted ball speed.

6.9 Conclusion

Corking a bat does not enhance "sweet spot" effect, according to the result of the augmented model in which vibration is taken into account. Two main reasons for Major League to prohibit corking is that the reaction time of the batters are prolonged and that corked bats are easier to control, which help the batter make a good performance.

7 Wood vs Aluminum Bat

In this part, we will work out the different behavior for wood (ash) and metal (aluminum) bat on the basis of the augmented model.

7.1 Differences in Parameters

The main differences between wood and aluminum bat are mass, location of center of mass, moment of inertia with respect to center of mass, and the effective coefficient of restitution e_{eff} .

Effective COR e_{eff} is an important factor which actually stand for the elasticity of the bat. The elasticity of a bat is described by Young's modulus and shear modulus, so in fact e_{eff} is a combination of the two modulus. Thus, we are able to take into account the difference in vibration of the bat, which is mainly determined by Young's modulus and shear modulus.

Parameters of the wood and aluminum bat:

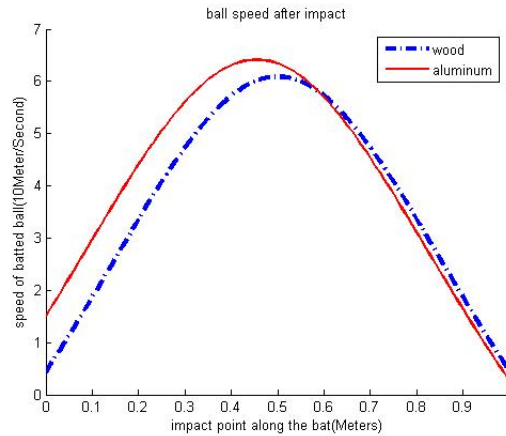
We take the initial velocity of the ball and the bat as: $v_{ball} = 8m/s$, $v_{bat} = 4m/s$.

Table 2: Properties of bat

	wood bat	aluminum bat
mass	0.846 kg	0.825 kg
length	0.84 m	0.81 m
distance of CM from handle	0.51 m	0.46 m
moment of inertia about CM	$0.047 \text{ kg} \cdot \text{m}^2$	$0.046 \text{ kg} \cdot \text{m}^2$
effective COR e_{eff}	0.40	0.58

7.2 Calculation and Analysis

Substitute these values for parameters in the equation we get above, the final velocity of ball v_f tuned a explicit function of the distance of impact point to the handle z_k . We draw a graph of this function for both kinds of bats, see figure .

Figure 6: v_f varies by z_k

From the graph, we note that peak value of v_f of aluminum bat is a bit higher than that of wood bat, and in a large zone near the handle the v_f of aluminum bat is also a higher than that of wood bat. At the peak point (sweet spot), the aluminum outperforms wood by about 5%, in term of velocity.

7.3 Conclusion

Notable differences between aluminum bat and wood bat are seen in the prediction of the augmented model. Overall, the aluminum bat outperforms wood bat, and at the sweet spot, the aluminum outperforms wood by about 5%. You may say the difference

is small, but it is never negligible in a regulation game, the foremost principle of which is justice. This enhanced "sweet spot" effect of metal bat is the main reason for its prohibition by Major League Baseball.

In addition, since the moment of inertia of and mass of aluminum bat is smaller, reaction time will be prolonged and it becomes easier for batter to control the bat, making the injustice even more serious.

8 Strengths and Weaknesses

8.1 Strengths

1. Vibration of bat is taken into account so that the accuracy of the model can be fairly good.
2. Physical explanation is put forward besides the model for a better understanding of the collision process.
3. Figures are used for explanation of the problem, thus making it more intuitive and easier to understand.

8.2 Weaknesses

1. The ball is actually nonlinear when deformation of the ball goes beyond a certain limit. The approximation of linear model turned out to be flawed when the force applied on the ball became very large.
2. Effective coefficient of restitution can not be calculated accurately. This affects the accuracy of the result of the model.

References

- [1] R. Cross, “The sweet spot of a baseball bat,” *American Journal of Physics*, vol. 66, pp. 772–779, September 1998.
- [2] H. Brody, “The sweet spot of a baseball bat,” *American Journal of Physics*, vol. 54, pp. 640–643, 1986.
- [3] L. Zandt, “The dynamical theory of the baseball bat,” *American Journal of Physics*, vol. 60, pp. 172–181, 1992.
- [4] R. K. Adair, *The Physics Of Baseball*. HarperCollins Publishers Inc., 2002.
- [5] A. Nathan, “Dynamics of the baseball-bat collision,” *American Journal of Physics*, vol. 68, pp. 979–990, November 2000.
- [6] P. Kirkpatrick, “batting the ball,” *American Journal of Physics*, vol. 31, pp. 606–613, 1963.
- [7] H. Brody, “Models of baseball bats,” *American Journal of Physics*, vol. 58, pp. 756–758, 1990.
- [8] A. M. Nathan, “Some remarks on corked bats,” December 1, 2004.