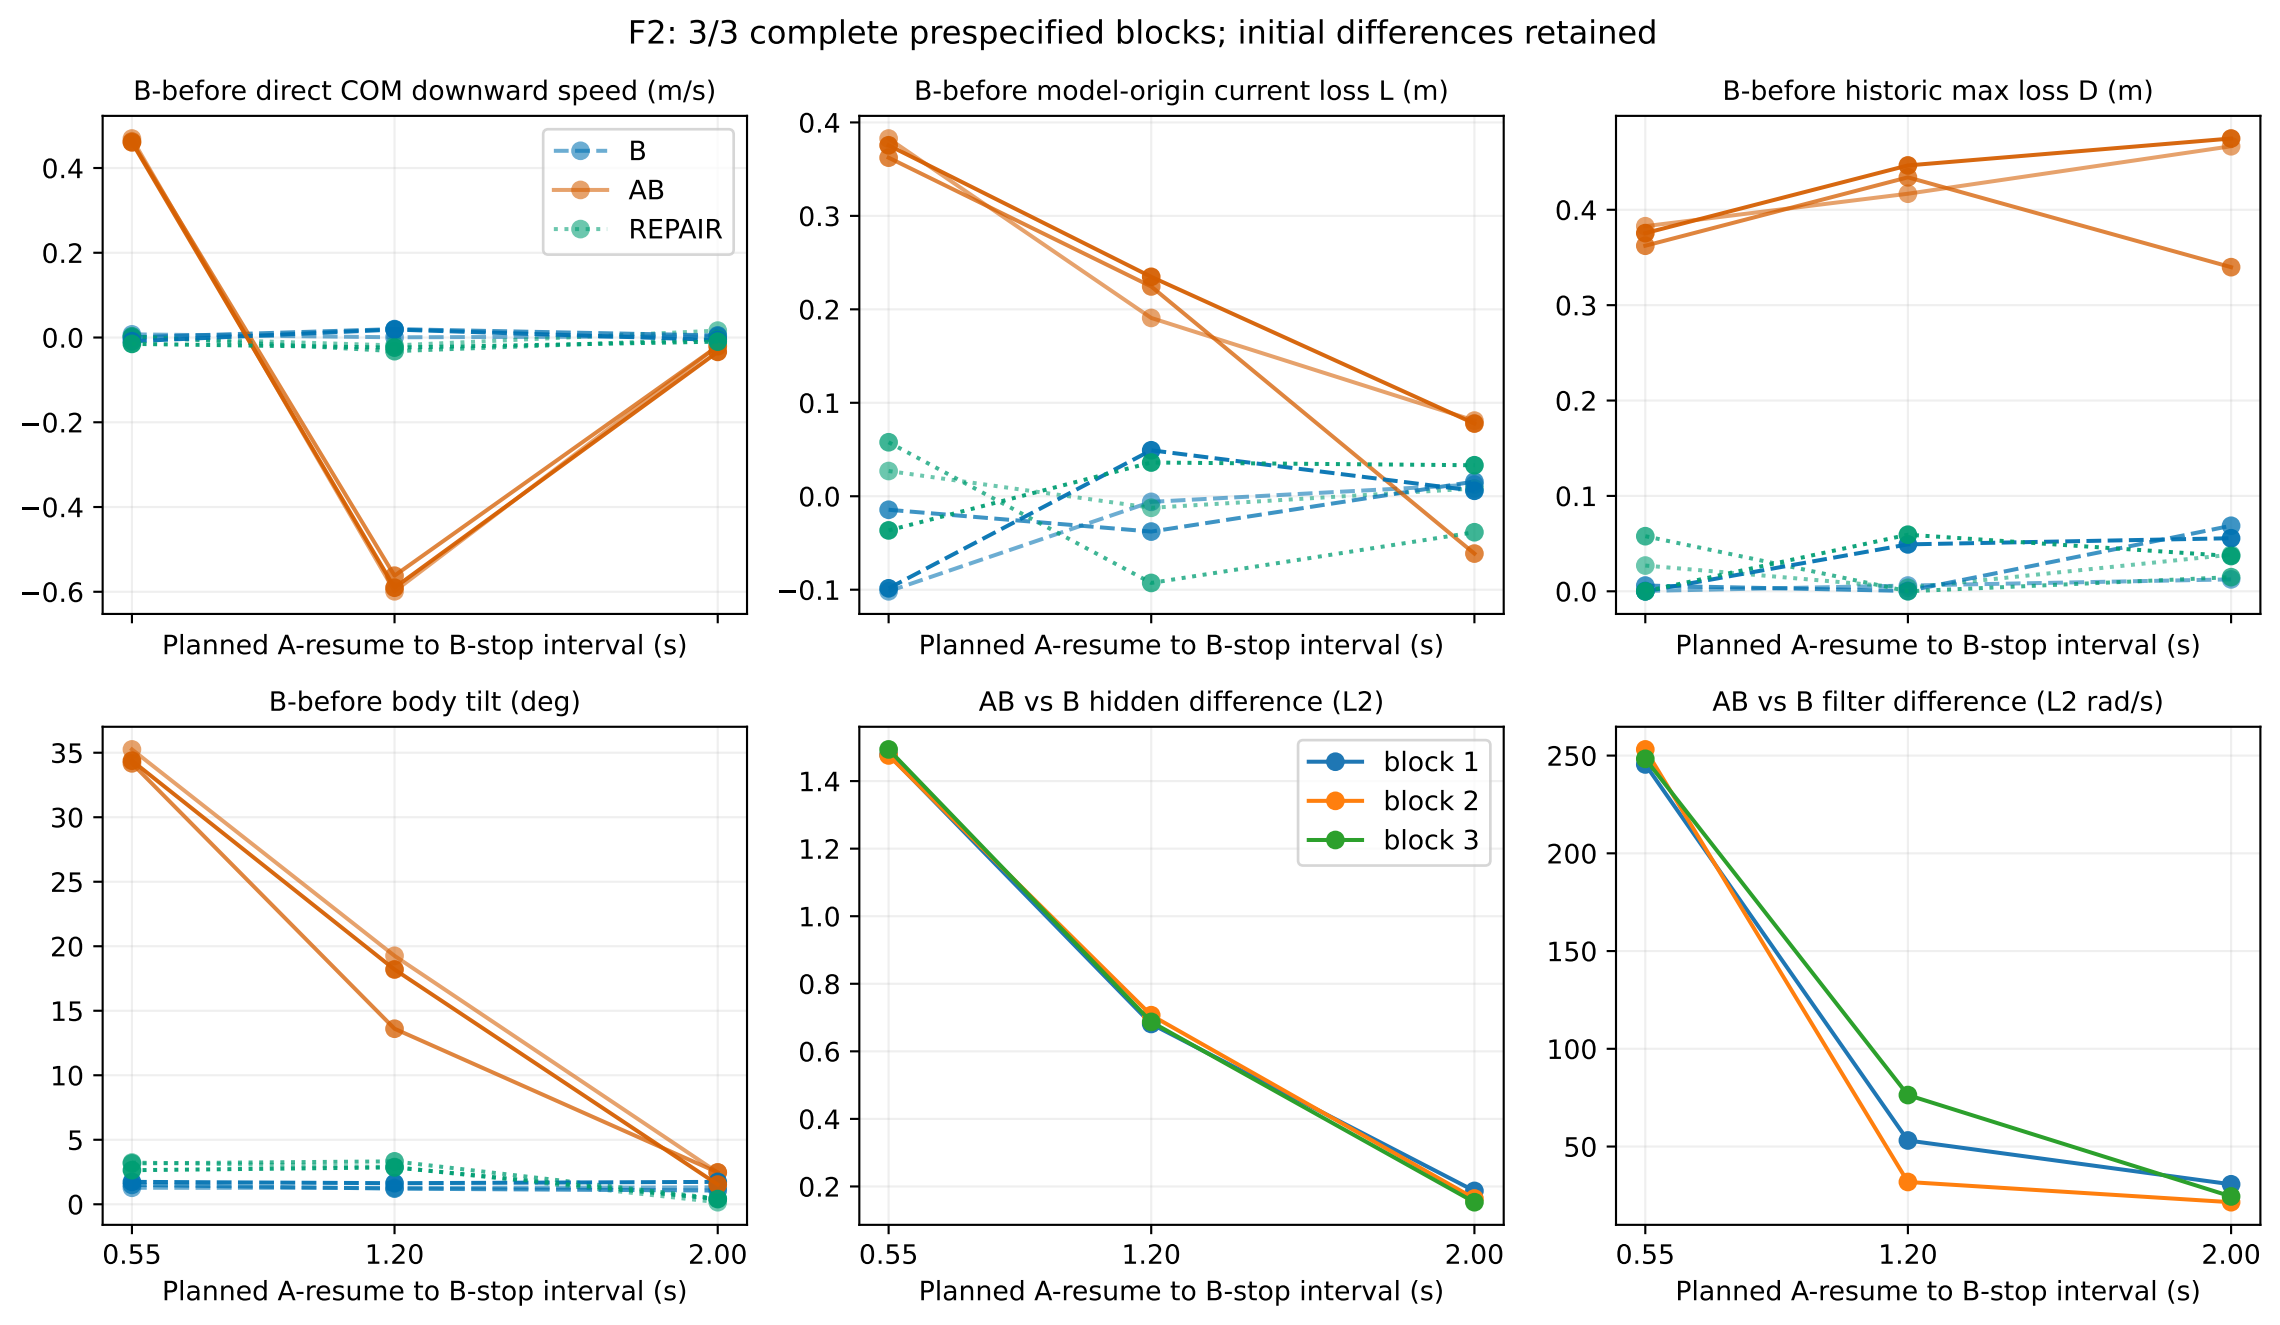
F2: 3/3 complete prespecified blocks; initial differences retained
B-before direct COM downward speed (m/s)
B
AB
REPAIR
Planned A-resume to B-stop interval (s)
B-before model-origin current loss L (m)
Planned A-resume to B-stop interval (s)
B-before historic max loss D (m)
Planned A-resume to B-stop interval (s)
B-before body tilt (deg)
0.55
1.20
2.00
Planned A-resume to B-stop interval (s)
AB vs B hidden difference (L2)
block 1
block 2
block 3
0.55
1.20
2.00
Planned A-resume to B-stop interval (s)
AB vs B filter difference (L2 rad/s)
0.55
1.20
2.00
Planned A-resume to B-stop interval (s)