






Schluter®-QUADEC

Schluter®-QUADEC is a finishing and edge-protection profile for tiled edges and outside corners of tiled surfaces. The reveal of the profile forms a square outer corner along the surface edge. QUADEC allows for modern decorative design and interesting contrasts. The profile can be combined with the QUADEC-FS feature strip profile and/or the DESIGNLINE border profile for further design options. QUADEC, in stainless steel, can also be used as a stair nosing or floor transition profile. QUADEC in aluminum and PVC feature an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.

Note: Also available in chrome-plated brass, and stainless steel 316L (1.4404 = V4A). Contact Customer Service for pricing and availability.

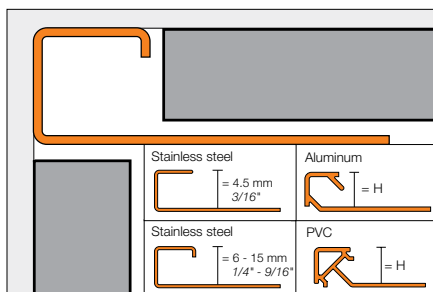

Inside/outside corner/end cap (EV/)



Stainless Steel 304 (1.4301 = V2A)

Schluter®-QUADEC						
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
4.5 - 3/16	Q 45 E	48.20	EV/Q 45 E	38.80	-	-
6 - 1/4	Q 60 E	55.34	EV/Q 60 E	42.54	V/RO 60 E	6.99
7 - 9/32	Q 70 E	57.42	EV/Q 70 E	43.14	-	-
8 - 5/16	Q 80 E	57.78	EV/Q 80 E	43.71	V/RO 80 E	6.99
9 - 11/32	Q 90 E	61.60	EV/Q 90 E	45.26	-	-
10 - 3/8	Q 100 E	62.06	EV/Q 100 E	47.21	V/RO 100 E	6.99
11 - 7/16	Q 110 E	64.23	EV/Q 110 E	47.93	V/RO 110 E	6.99
12.5 - 1/2	Q 125 E	66.11	EV/Q 125 E	48.45	V/RO 125 E	6.99
14 - 17/32	Q 140 E	70.81	EV/Q 140 E	50.37	-	-
15 - 9/16	Q 150 E	73.65	EV/Q 150 E	54.03	-	-

Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
6 - 1/4	Q 60 EB	81.41	EV/Q 60 EB	51.34	V/RO 60 E	6.99
7 - 9/32	Q 70 EB	84.49	EV/Q 70 EB	51.89	-	-
8 - 5/16	Q 80 EB	87.55	EV/Q 80 EB	52.41	V/RO 80 E	6.99
9 - 11/32	Q 90 EB	90.64	EV/Q 90 EB	54.25	-	-
10 - 3/8	Q 100 EB	94.03	EV/Q 100 EB	56.60	V/RO 100 E	6.99
11 - 7/16	Q 110 EB	97.31	EV/Q 110 EB	57.45	V/RO 110 E	6.99
12.5 - 1/2	Q 125 EB	100.17	EV/Q 125 EB	58.00	V/RO 125 E	6.99
14 - 17/32	Q 140 EB	102.70	EV/Q 140 EB	58.76	-	-
15 - 9/16	Q 150 EB	104.17	EV/Q 150 EB	60.34	-	-



Anodized Aluminum

Schluter®-QUADEC

Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)				Polished chrome anodized aluminum (ACG)				Connector	
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Item No.	\$ / Unit
4.5 - 3/16	Q 45 AE	20.01	EV/Q 45 AE	9.47	Q 45 ACG	25.14	EV/Q 45 ACG	11.24	-	-
6 - 1/4	Q 60 AE	20.85	EV/Q 60 AE	9.47	Q 60 ACG	26.19	EV/Q 60 ACG	11.24	V/Q 60	2.92
8 - 5/16	Q 80 AE	21.74	EV/Q 80 AE	9.47	Q 80 ACG	29.51	EV/Q 80 ACG	11.24	V/RO 80	2.92
10 - 3/8	Q 100 AE	23.50	EV/Q 100 AE	9.47	Q 100 ACG	32.54	EV/Q 100 ACG	11.24	V/RO 100	2.92
12.5 - 1/2	Q 125 AE	26.23	EV/Q 125 AE	9.47	Q 125 ACG	38.12	EV/Q 125 ACG	11.24	V/RO 125	2.92
15 - 9/16	Q 150 AE	29.60	EV/Q 150 AE	10.71	-	-	-	-	-	-
20 - 3/4	Q 200 AE	32.42	EV/Q 200 AE	10.71	-	-	-	-	-	-

Length = 2.5 m - 8' 2-1/2"	Satin nickel anodized aluminum (AT)				Brushed nickel anodized aluminum (ATGB)				Connector	
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Item No.	\$ / Unit
4.5 - 3/16	Q 45 AT	21.08	EV/Q 45 AT	9.30	-	-	-	-	-	-
6 - 1/4	Q 60 AT	21.96	EV/Q 60 AT	9.30	-	-	-	-	V/Q 60	2.92
8 - 5/16	Q 80 AT	23.46	EV/Q 80 AT	9.30	Q 80 ATGB	28.75	EV/Q 80 ATGB	17.20	V/RO 80	2.92
10 - 3/8	Q 100 AT	24.99	EV/Q 100 AT	9.30	Q 100 ATGB	31.99	EV/Q 100 ATGB	17.20	V/RO 100	2.92
12.5 - 1/2	Q 125 AT	27.83	EV/Q 125 AT	9.30	Q 125 ATGB	34.56	EV/Q 125 ATGB	17.20	V/RO 125	2.92

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anodized aluminum (ABGB)				Connector	
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Item No.	\$ / Unit
6 - 1/4	Q 60 ABGB	28.14	EV/Q 60 ABGB	17.20	V/Q 60	2.92
8 - 5/16	Q 80 ABGB	28.75	EV/Q 80 ABGB	17.20	V/RO 80	2.92
10 - 3/8	Q 100 ABGB	31.99	EV/Q 100 ABGB	17.20	V/RO 100	2.92
12.5 - 1/2	Q 125 ABGB	34.56	EV/Q 125 ABGB	17.20	V/RO 125	2.92

10-foot (3.05 m) QUADEC Profiles – Anodized Aluminum

Length = 3.05 m - 10'	Polished chrome anodized aluminum (ACG)	
H = mm - in.	Profile	\$ / Length
8 - 5/16	Q 80 ACG / 300	36.90
10 - 3/8	Q 100 ACG / 300	40.68
12.5 - 1/2	Q 125 ACG / 300	47.66

Special shipping conditions apply, see pages 233-234.



Schluter®-TRENDLINE Textured Color-coated Aluminum

Schluter®-QUADEC						
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
4.5 - 3/16	Q 45 + color*	44.71	EV/Q 45 + color*	17.87	-	-
6 - 1/4	Q 60 + color*	45.60	EV/Q 60 + color*	17.87	V/Q 60	2.92
8 - 5/16	Q 80 + color*	46.54	EV/Q 80 + color*	17.87	V/RO 80	2.92
10 - 3/8	Q 100 + color*	47.79	EV/Q 100 + color*	17.87	V/RO 100	2.92
11 - 7/16	Q 110 + color*	48.45	EV/Q 110 + color*	17.87	V/RO 110	2.92
12.5 - 1/2	Q 125 + color*	48.92	EV/Q 125 + color*	17.87	V/RO 125	2.92



*Color Codes

TSI	TSBG	TSSG	TSC	TSB	TSR	TSOB	TSG	TSLA	TSDA
Ivory	Greige	Stone grey	Cream	Beige	Rustic brown	Bronze	Pewter	Light anthracite	Dark anthracite

* To complete the item number, add the color code (e.g., Q 60 TSC).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Matte color-coated aluminum					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
4.5 - 3/16	Q 45 + color*	35.42	EV/Q 45 + color*	17.87	-	-
6 - 1/4	Q 60 + color*	36.14	EV/Q 60 + color*	17.87	V/Q 60	2.92
8 - 5/16	Q 80 + color*	36.88	EV/Q 80 + color*	17.87	V/RO 80	2.92
10 - 3/8	Q 100 + color*	38.08	EV/Q 100 + color*	17.87	V/RO 100	2.92
11 - 7/16	Q 110 + color*	38.52	EV/Q 110 + color*	17.87	V/RO 110	2.92
12.5 - 1/2	Q 125 + color*	38.90	EV/Q 125 + color*	17.87	V/RO 125	2.92

*Color Codes

MBW	MGS
Matte white	Matte black

* To complete the item number, add the color code (e.g., Q 60 MGS).

10-foot (3.05 m) QUADEC Profiles – Textured Color-coated Aluminum

Length = 3.05 m - 10'	Textured color-coated aluminum (TS)		Matte white (MBW)		Matte black (MGS)	
H = mm - in.	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length
6 - 1/4	Q 60 + color* / 300	57.00	Q 60 MBW / 300	45.17	Q 60 MGS / 300	45.17
8 - 5/16	Q 80 + color* / 300	58.16	Q 80 MBW / 300	46.11	Q 80 MGS / 300	46.11
10 - 3/8	Q 100 + color* / 300	59.73	Q 100 MBW / 300	47.60	Q 100 MGS / 300	47.60
11 - 7/16	Q 110 + color* / 300	60.56	Q 110 MBW / 300	48.14	Q 110 MGS / 300	48.14
12.5 - 1/2	Q 125 + color* / 300	61.17	Q 125 MBW / 300	48.61	Q 125 MGS / 300	48.61

Special shipping conditions apply, see pages 233-234.



Color-coated Aluminum

Schluter®-QUADEC				
Length = 2.5 m - 8' 2-1/2"	Color-coated aluminum (AC)			
H = mm - in.	Profile	\$ / Length	Outside corner, 90° (die cast)	\$ / Unit
4.5 - 3/16	Q 45 + color*	21.59	ED/Q 45 + color*	5.19
6 - 1/4	Q 60 + color*	23.21	ED/Q 60 + color*	5.19
8 - 5/16	Q 80 + color*	24.54	ED/Q 80 + color*	5.19
10 - 3/8	Q 100 + color*	25.90	ED/Q 100 + color*	5.19
11 - 7/16	Q 110 + color*	26.70	ED/Q 110 + color*	5.19
12.5 - 1/2	Q 125 + color*	28.34	ED/Q 125 + color*	5.19

*Color Codes



* To complete the item number, add the color code (e.g., Q 45 PG).

PVC

Length = 2.5 m - 8' 2-1/2"	PVC (P)			
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	\$ / Unit
6 - 1/4	PQ 60 + color*	8.47	E/PQ 60 + color*	3.16
8 - 5/16	PQ 80 + color*	8.90	E/PQ 80 + color*	3.16
10 - 3/8	PQ 100 + color*	9.51	E/PQ 100 + color*	3.16
11 - 7/16	PQ 110 + color*	10.71	E/PQ 110 + color*	3.16
12.5 - 1/2	PQ 125 + color*	11.90	E/PQ 125 + color*	3.16

*Color Codes



* To complete the item number, add the color code (e.g., PQ 80 PG).



QUADEC in cream (page 59)