




Schluter®-RONDEC


Schluter®-RONDEC is a finishing and edge-protection profile for tiled edges and outside corners of tiled surfaces. The reveal of the profile forms a symmetrically rounded corner along the surface edge. RONDEC allows for color coordination with tile and grout and the creation of interesting accents in decorative designs. The profile can be combined with the DESIGNLINE border profile for further design options. RONDEC in aluminum and PVC features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.

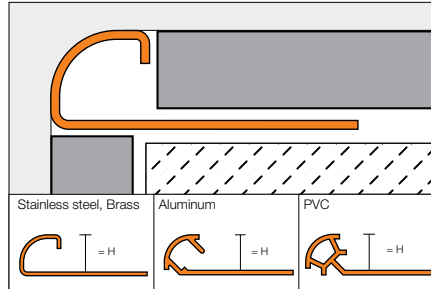

Accessories



90° Outside corner



90° Inside corner



RONDEC prefabricated corners eliminate the need for a mitered edge.

EV/



ED/



Corners with item numbers beginning with EV/ are milled out of solid aluminum and corners with item numbers beginning with ED/ are die cast metal.

90° Double-leg outside corner (E2L/)



90° Double-leg inside corner (I2L/)



Double-leg corners simplify the framing of smaller elements with the RONDEC profile, such as niches, windows, etc. The legs are detachable for use in applications where a single-leg corner is needed.

Sink corner with 3/8" (10 mm) radius (I2S/)



Sink corner with 1-1/2" (38 mm) radius (ISK/)



Stainless steel sink corners are used with the RONDEC profile to produce tiled-under sinks. The corners have a large radius (3/8" - 10 mm or 1-1/2" - 38 mm) that allows them to match up to the contour of most standard sinks. The 3/8" corner piece features a double-leg design for ease of installation, while the 1-1/2" corner includes two stainless steel connectors to maintain the alignment of the corner piece and profiles during installation.

Connector Stainless Steel (V/)



Connector PVC (V/)



RONDEC connectors simplify the alignment of adjacent profile sections. Connectors are made of either PVC for aluminum profiles or stainless steel for stainless steel profiles.

End cap



End caps feature a bendable leg that is inserted into the RONDEC profile, and a brushed stainless steel plate that covers the open area of the profile in applications where the end of the profile is to be left exposed. RONDEC end caps can be used with stainless steel and brushed stainless steel RONDEC profiles.





Stainless Steel 304 (1.4301 = V2A)



Note: RONDEC in sizes 60, 80, 100, and 125 is also available in stainless steel 316L (1.4404 = V4A). Contact customer service for price and availability.

Schluter®-RONDEC								
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)							
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	\$ / Unit	Sink corner 3/8" (10 mm) radius	\$ / Unit	Sink corner 1-1/2" (38 mm) radius	\$ / Unit
4.5 - 3/16	RO 45 E	50.27	EV/RO 45 E	37.16	-	-	-	-
6 - 1/4	RO 60 E	52.32	EV/RO 60 E	37.16	-	-	-	-
7 - 9/32	RO 70 E	54.25	EV/RO 70 E	39.91	-	-	-	-
8 - 5/16	RO 80 E	54.62	EV/RO 80 E	39.91	I2S/RO 80 E/V2A	59.91	ISK/RO 80 E/38	31.20
9 - 11/32	RO 90 E	58.33	EV/RO 90 E	42.86	-	-	-	-
10 - 3/8	RO 100 E	58.65	EV/RO 100 E	42.86	I2S/RO 100 E/V2A	59.91	ISK/RO 100 E/38	31.20
11 - 7/16	RO 110 E	60.56	EV/RO 110 E	44.36	-	-	-	-
12.5 - 1/2	RO 125 E	62.48	EV/RO 125 E	44.36	I2S/RO 125 E/V2A	59.91	ISK/RO 125 E/38	31.20
15 - 9/16	RO 150 E	70.77	EV/RO 150 E	45.39	-	-	-	-

Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)		Die cast metal with stainless steel appearance		
H = mm - in.	End cap	\$ / Unit	Outside corner, 90°	Inside corner, 90°	\$ / Unit
6 - 1/4	-	-	ED/RO 60 E	ID/RO 60 E	8.79
8 - 5/16	EK/RO 80 EB	5.33	ED/RO 80 E	ID/RO 80 E	8.79
10 - 3/8	EK/RO 100 EB	5.33	ED/RO 100 E	ID/RO 100 E	8.79
12.5 - 1/2	EK/RO 125 EB	5.33	ED/RO 125 E	ID/RO 125 E	8.79

Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)							
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	\$ / Unit	Sink corner 3/8" (10 mm) radius	\$ / Unit	End cap	\$ / Unit
6 - 1/4	RO 60 EB	80.24	EV/RO 60 EB	45.07	-	-	-	-
7 - 9/32	RO 70 EB	81.81	EV/RO 70 EB	45.07	-	-	-	-
8 - 5/16	RO 80 EB	83.75	EV/RO 80 EB	45.07	I2S/RO 80 EB/V2A	59.91	EK/RO 80 EB	5.33
9 - 11/32	RO 90 EB	85.43	EV/RO 90 EB	45.07	-	-	-	-
10 - 3/8	RO 100 EB	87.47	EV/RO 100 EB	52.01	I2S/RO 100 EB/V2A	59.91	EK/RO 100 EB	5.33
11 - 7/16	RO 110 EB	89.21	EV/RO 110 EB	52.01	-	-	-	-
12.5 - 1/2	RO 125 EB	91.28	EV/RO 125 EB	52.01	I2S/RO 125 EB/V2A	59.91	EK/RO 125 EB	5.33
15 - 9/16	RO 150 EB	100.44	EV/RO 150 EB	55.11	-	-	-	-

Stainless steel 304 (1.4301 = V2A) (E)		
H = mm - in.	Connector	\$ / Unit
6 - 1/4	V/RO 60 E	6.99
8 - 5/16	V/RO 80 E	6.99
10 - 3/8	V/RO 100 E	6.99
11 - 7/16	V/RO 110 E	6.99
12.5 - 1/2	V/RO 125 E	6.99



Brass

**Schluter®-RONDEC**

Length = 2.5 m - 8' 2-1/2"		Chrome-plated solid brass (MC)*	Aluminum with polished chrome finish		
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit
6 - 1/4	RO 60 MC	137.55	EV/RO 60 ACG	IV/RO 60 ACG	10.41
8 - 5/16	RO 80 MC	145.44	EV/RO 80 ACG	IV/RO 80 ACG	10.41
10 - 3/8	RO 100 MC	151.69	EV/RO 100 ACG	IV/RO 100 ACG	10.41
12.5 - 1/2	RO 125 MC	159.80	EV/RO 125 ACG	IV/RO 125 ACG	10.41

Anodized Aluminum

**Schluter®-RONDEC**

Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)					
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AE	19.90	EV/RO 60 AE	IV/RO 60 AE	8.79	V/RO 60	2.92
8 - 5/16	RO 80 AE	20.76	EV/RO 80 AE	IV/RO 80 AE	8.79	V/RO 80	2.92
10 - 3/8	RO 100 AE	22.42	EV/RO 100 AE	IV/RO 100 AE	8.79	V/RO 100	2.92
12.5 - 1/2	RO 125 AE	25.04	EV/RO 125 AE	IV/RO 125 AE	8.79	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AE	I2L/RO 80 AE	18.85
10 - 3/8	E2L/RO 100 AE	I2L/RO 100 AE	18.85
12.5 - 1/2	E2L/RO 125 AE	I2L/RO 125 AE	18.85

Length = 2.5 m - 8' 2-1/2"		Polished chrome anod. alu. (ACG)					
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 ACG	24.33	EV/RO 60 ACG	IV/RO 60 ACG	10.41	V/RO 60	2.92
8 - 5/16	RO 80 ACG	27.26	EV/RO 80 ACG	IV/RO 80 ACG	10.41	V/RO 80	2.92
10 - 3/8	RO 100 ACG	30.21	EV/RO 100 ACG	IV/RO 100 ACG	10.41	V/RO 100	2.92
12.5 - 1/2	RO 125 ACG	35.35	EV/RO 125 ACG	IV/RO 125 ACG	10.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 ACG	I2L/RO 80 ACG	18.13
10 - 3/8	E2L/RO 100 ACG	I2L/RO 100 ACG	18.13
12.5 - 1/2	E2L/RO 125 ACG	I2L/RO 125 ACG	18.13

Length = 2.5 m - 8' 2-1/2"		Brushed chrome anod. alu. (ACGB)					
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 ACGB	25.04	EV/RO 60 ACGB	IV/RO 60 ACGB	16.41	V/RO 60	2.92
8 - 5/16	RO 80 ACGB	28.00	EV/RO 80 ACGB	IV/RO 80 ACGB	16.41	V/RO 80	2.92
10 - 3/8	RO 100 ACGB	31.66	EV/RO 100 ACGB	IV/RO 100 ACGB	16.41	V/RO 100	2.92
12.5 - 1/2	RO 125 ACGB	36.84	EV/RO 125 ACGB	IV/RO 125 ACGB	16.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 ACGB	I2L/RO 80 ACGB	22.36
10 - 3/8	E2L/RO 100 ACGB	I2L/RO 100 ACGB	22.36
12.5 - 1/2	E2L/RO 125 ACGB	I2L/RO 125 ACGB	22.36

**Schluter®-RONDEC**

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AT	20.37	EV/RO 60 AT	IV/RO 60 AT	8.86	V/RO 60	2.92
8 - 5/16	RO 80 AT	21.75	EV/RO 80 AT	IV/RO 80 AT	8.86	V/RO 80	2.92
10 - 3/8	RO 100 AT	22.73	EV/RO 100 AT	IV/RO 100 AT	8.86	V/RO 100	2.92
12.5 - 1/2	RO 125 AT	25.79	EV/RO 125 AT	IV/RO 125 AT	8.86	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AT	I2L/RO 80 AT	18.59
10 - 3/8	E2L/RO 100 AT	I2L/RO 100 AT	18.59
12.5 - 1/2	E2L/RO 125 AT	I2L/RO 125 AT	18.59

Length = 2.5 m - 8' 2-1/2"	Polished nickel anod. alu. (ATG)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 ATG	26.55	EV/RO 60 ATG	IV/RO 60 ATG	10.41	V/RO 60	2.92
8 - 5/16	RO 80 ATG	28.00	EV/RO 80 ATG	IV/RO 80 ATG	10.41	V/RO 80	2.92
10 - 3/8	RO 100 ATG	33.16	EV/RO 100 ATG	IV/RO 100 ATG	10.41	V/RO 100	2.92
12.5 - 1/2	RO 125 ATG	37.57	EV/RO 125 ATG	IV/RO 125 ATG	10.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 ATG	I2L/RO 80 ATG	18.85
10 - 3/8	E2L/RO 100 ATG	I2L/RO 100 ATG	18.85
12.5 - 1/2	E2L/RO 125 ATG	I2L/RO 125 ATG	18.85

Length = 2.5 m - 8' 2-1/2"	Brushed nickel anod. alu. (ATGB)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 ATGB	28.00	EV/RO 60 ATGB	IV/RO 60 ATGB	16.24	V/RO 60	2.92
8 - 5/16	RO 80 ATGB	30.94	EV/RO 80 ATGB	IV/RO 80 ATGB	16.24	V/RO 80	2.92
10 - 3/8	RO 100 ATGB	33.98	EV/RO 100 ATGB	IV/RO 100 ATGB	16.24	V/RO 100	2.92
12.5 - 1/2	RO 125 ATGB	39.41	EV/RO 125 ATGB	IV/RO 125 ATGB	16.24	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 ATGB	I2L/RO 80 ATGB	23.24
10 - 3/8	E2L/RO 100 ATGB	I2L/RO 100 ATGB	23.24
12.5 - 1/2	E2L/RO 125 ATGB	I2L/RO 125 ATGB	23.24

Length = 2.5 m - 8' 2-1/2"	Satin copper anod. alu. (AK)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AK	21.37	EV/RO 60 AK	IV/RO 60 AK	8.79	V/RO 60	2.92
8 - 5/16	RO 80 AK	22.83	EV/RO 80 AK	IV/RO 80 AK	8.79	V/RO 80	2.92
10 - 3/8	RO 100 AK	24.30	EV/RO 100 AK	IV/RO 100 AK	8.79	V/RO 100	2.92
12.5 - 1/2	RO 125 AK	25.79	EV/RO 125 AK	IV/RO 125 AK	8.79	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AK	I2L/RO 80 AK	18.30
10 - 3/8	E2L/RO 100 AK	I2L/RO 100 AK	18.30
12.5 - 1/2	E2L/RO 125 AK	I2L/RO 125 AK	18.30


Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Polished copper anod. alu. (AKG)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AKG	26.55	EV/RO 60 AKG	IV/RO 60 AKG	10.41	V/RO 60	2.92
8 - 5/16	RO 80 AKG	28.00	EV/RO 80 AKG	IV/RO 80 AKG	10.41	V/RO 80	2.92
10 - 3/8	RO 100 AKG	33.16	EV/RO 100 AKG	IV/RO 100 AKG	10.41	V/RO 100	2.92
12.5 - 1/2	RO 125 AKG	37.57	EV/RO 125 AKG	IV/RO 125 AKG	10.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AKG	I2L/RO 80 AKG	18.66
10 - 3/8	E2L/RO 100 AKG	I2L/RO 100 AKG	18.66
12.5 - 1/2	E2L/RO 125 AKG	I2L/RO 125 AKG	18.66

Length = 2.5 m - 8' 2-1/2"	Brushed copper anod. alu. (AKGB)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AKGB	28.00	EV/RO 60 AKGB	IV/RO 60 AKGB	16.41	V/RO 60	2.92
8 - 5/16	RO 80 AKGB	30.94	EV/RO 80 AKGB	IV/RO 80 AKGB	16.41	V/RO 80	2.92
10 - 3/8	RO 100 AKGB	34.63	EV/RO 100 AKGB	IV/RO 100 AKGB	16.41	V/RO 100	2.92
12.5 - 1/2	RO 125 AKGB	39.41	EV/RO 125 AKGB	IV/RO 125 AKGB	16.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AKGB	I2L/RO 80 AKGB	22.78
10 - 3/8	E2L/RO 100 AKGB	I2L/RO 100 AKGB	22.78
12.5 - 1/2	E2L/RO 125 AKGB	I2L/RO 125 AKGB	22.78

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anod. alu. (ABGB)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 ABGB	28.00	EV/RO 60 ABGB	IV/RO 60 ABGB	16.41	V/RO 60	2.92
8 - 5/16	RO 80 ABGB	30.94	EV/RO 80 ABGB	IV/RO 80 ABGB	16.41	V/RO 80	2.92
10 - 3/8	RO 100 ABGB	34.63	EV/RO 100 ABGB	IV/RO 100 ABGB	16.41	V/RO 100	2.92
12.5 - 1/2	RO 125 ABGB	39.41	EV/RO 125 ABGB	IV/RO 125 ABGB	16.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 ABGB	I2L/RO 80 ABGB	22.78
10 - 3/8	E2L/RO 100 ABGB	I2L/RO 100 ABGB	22.78
12.5 - 1/2	E2L/RO 125 ABGB	I2L/RO 125 ABGB	22.78

Length = 2.5 m - 8' 2-1/2"	Satin brass anod. alu. (AM)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AM	21.37	EV/RO 60 AM	IV/RO 60 AM	8.86	V/RO 60	2.92
8 - 5/16	RO 80 AM	24.33	EV/RO 80 AM	IV/RO 80 AM	8.86	V/RO 80	2.92
10 - 3/8	RO 100 AM	27.26	EV/RO 100 AM	IV/RO 100 AM	8.86	V/RO 100	2.92
12.5 - 1/2	RO 125 AM	31.66	EV/RO 125 AM	IV/RO 125 AM	8.86	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AM	I2L/RO 80 AM	18.30
10 - 3/8	E2L/RO 100 AM	I2L/RO 100 AM	18.30
12.5 - 1/2	E2L/RO 125 AM	I2L/RO 125 AM	18.30

**Schluter®-RONDEC**

Length = 2.5 m - 8' 2-1/2"	Polished brass anod. alu. (AMG)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AMG	25.04	EV/RO 60 AMG	IV/RO 60 AMG	10.41	V/RO 60	2.92
8 - 5/16	RO 80 AMG	28.00	EV/RO 80 AMG	IV/RO 80 AMG	10.41	V/RO 80	2.92
10 - 3/8	RO 100 AMG	31.66	EV/RO 100 AMG	IV/RO 100 AMG	10.41	V/RO 100	2.92
12.5 - 1/2	RO 125 AMG	36.10	EV/RO 125 AMG	IV/RO 125 AMG	10.41	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AMG	I2L/RO 80 AMG	18.30
10 - 3/8	E2L/RO 100 AMG	I2L/RO 100 AMG	18.30
12.5 - 1/2	E2L/RO 125 AMG	I2L/RO 125 AMG	18.30

Length = 2.5 m - 8' 2-1/2"	Brushed brass anod. alu. (AMGB)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AMGB	26.52	EV/RO 60 AMGB	IV/RO 60 AMGB	16.71	V/RO 60	2.92
8 - 5/16	RO 80 AMGB	29.43	EV/RO 80 AMGB	IV/RO 80 AMGB	16.71	V/RO 80	2.92
10 - 3/8	RO 100 AMGB	33.16	EV/RO 100 AMGB	IV/RO 100 AMGB	16.71	V/RO 100	2.92
12.5 - 1/2	RO 125 AMGB	37.57	EV/RO 125 AMGB	IV/RO 125 AMGB	16.71	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AMGB	I2L/RO 80 AMGB	23.24
10 - 3/8	E2L/RO 100 AMGB	I2L/RO 100 AMGB	23.24
12.5 - 1/2	E2L/RO 125 AMGB	I2L/RO 125 AMGB	23.24

Length = 2.5 m - 8' 2-1/2"	Graphite anod. alu. (AGR)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AGR	21.80	EV/RO 60 AGR	IV/RO 60 AGR	8.97	V/RO 60	2.92
8 - 5/16	RO 80 AGR	23.30	EV/RO 80 AGR	IV/RO 80 AGR	8.97	V/RO 80	2.92
10 - 3/8	RO 100 AGR	24.81	EV/RO 100 AGR	IV/RO 100 AGR	8.97	V/RO 100	2.92
12.5 - 1/2	RO 125 AGR	26.30	EV/RO 125 AGR	IV/RO 125 AGR	8.97	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AGR	I2L/RO 80 AGR	18.66
10 - 3/8	E2L/RO 100 AGR	I2L/RO 100 AGR	18.66
12.5 - 1/2	E2L/RO 125 AGR	I2L/RO 125 AGR	18.66

Length = 2.5 m - 8' 2-1/2"	Bright black anod. alu. (AGSG)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AGSG	27.06	EV/RO 60 AGSG	IV/RO 60 AGSG	10.94	V/RO 60	2.92
8 - 5/16	RO 80 AGSG	28.54	EV/RO 80 AGSG	IV/RO 80 AGSG	10.94	V/RO 80	2.92
10 - 3/8	RO 100 AGSG	33.80	EV/RO 100 AGSG	IV/RO 100 AGSG	10.94	V/RO 100	2.92
12.5 - 1/2	RO 125 AGSG	38.32	EV/RO 125 AGSG	IV/RO 125 AGSG	10.94	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AGSG	I2L/RO 80 AGSG	19.03
10 - 3/8	E2L/RO 100 AGSG	I2L/RO 100 AGSG	19.03
12.5 - 1/2	E2L/RO 125 AGSG	I2L/RO 125 AGSG	19.03


Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Brushed black anod. alu. (AGSB)						
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 AGSB	28.00	EV/RO 60 AGSB	IV/RO 60 AGSB	16.55	V/RO 60	2.92
8 - 5/16	RO 80 AGSB	30.94	EV/RO 80 AGSB	IV/RO 80 AGSB	16.55	V/RO 80	2.92
10 - 3/8	RO 100 AGSB	34.63	EV/RO 100 AGSB	IV/RO 100 AGSB	16.55	V/RO 100	2.92
12.5 - 1/2	RO 125 AGSB	38.29	EV/RO 125 AGSB	IV/RO 125 AGSB	16.55	V/RO 125	2.92

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	\$ / Unit
8 - 5/16	E2L/RO 80 AGSB	I2L/RO 80 AGSB	22.78
10 - 3/8	E2L/RO 100 AGSB	I2L/RO 100 AGSB	22.78
12.5 - 1/2	E2L/RO 125 AGSB	I2L/RO 125 AGSB	22.78

10-foot (3.05 m) RONDEC Profiles – Anodized Aluminum

Length = 3.05 m - 10'	Satin anod. alu. (AE)		Polished chrome anod. alu. (ACG)		Satin nickel anod. alu. (AT)	
H = mm - in.	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length
8 - 5/16	RO 80 AE / 300	25.94	RO 80 ACG / 300	34.10	RO 80 AT / 300	27.17
10 - 3/8	RO 100 AE / 300	28.04	RO 100 ACG / 300	37.76	RO 100 AT / 300	28.41
12.5 - 1/2	RO 125 AE / 300	31.29	RO 125 ACG / 300	44.19	RO 125 AT / 300	32.25

Special shipping conditions apply, see pages 233-234.



RONDEC in brushed chrome (page 50)



Schluter®-TRENDLINE Textured Color-coated Aluminum



Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"		Textured color-coated aluminum (TS)					
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 + color*	46.05	EV/RO 60 + color*	IV/RO 60 + color*	16.42	V/RO 60	2.92
8 - 5/16	RO 80 + color*	46.99	EV/RO 80 + color*	IV/RO 80 + color*	16.42	V/RO 80	2.92
10 - 3/8	RO 100 + color*	48.51	EV/RO 100 + color*	IV/RO 100 + color*	16.42	V/RO 100	2.92
11 - 7/16	RO 110 + color*	49.06	EV/RO 110 + color*	IV/RO 110 + color*	16.42	V/RO 110	2.92
12.5 - 1/2	RO 125 + color*	49.54	EV/RO 125 + color*	IV/RO 125 + color*	16.42	V/RO 125	2.92

*Color Codes

TSI	TSBG	TSSG	TSC	TSB	TSR	TSOB	TSG	TSLA	TSDA
Ivory	Greige	Stone grey	Cream	Beige	Rustic brown	Bronze	Pewter	Light anthracite	Dark anthracite

* To complete the item number, add the color code (e.g., RO 60 TSC).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"		Matte color-coated aluminum					
H = mm - in.	Profile	\$ / Length	Outside corner, 90° (die cast)	Inside corner, 90° (die cast)	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 + color*	36.84	ED/RO 60 + color*	ID/RO 60 + color*	12.75	V/RO 60	2.92
8 - 5/16	RO 80 + color*	37.59	ED/RO 80 + color*	ID/RO 80 + color*	12.75	V/RO 80	2.92
10 - 3/8	RO 100 + color*	38.81	ED/RO 100 + color*	ID/RO 100 + color*	12.75	V/RO 100	2.92
11 - 7/16	RO 110 + color*	39.25	ED/RO 110 + color*	ID/RO 110 + color*	12.75	V/RO 110	2.92
12.5 - 1/2	RO 125 + color*	39.63	ED/RO 125 + color*	ID/RO 125 + color*	12.75	V/RO 125	2.92

*Color Codes

MBW	MGS	* To complete the item number, add the color code (e.g., RO 60 MGS).
Matte white	Matte black	

10-foot (3.05 m) RONDEC Profiles – Textured Color-coated Aluminum

Length = 3.05 m - 10'	Textured color-coated aluminum (TS)		Matte white (MBW)		Matte black (MGS)	
H = mm - in.	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length
6 - 1/4	RO 60 + color* / 300	57.56	RO 60 MBW / 300	46.05	RO 60 MGS / 300	46.05
8 - 5/16	RO 80 + color* / 300	58.74	RO 80 MBW / 300	46.99	RO 80 MGS / 300	46.99
10 - 3/8	RO 100 + color* / 300	60.66	RO 100 MBW / 300	48.51	RO 100 MGS / 300	48.51
11 - 7/16	RO 110 + color* / 300	61.31	RO 110 MBW / 300	49.07	RO 110 MGS / 300	49.07
12.5 - 1/2	RO 125 + color* / 300	61.94	RO 125 MBW / 300	49.54	RO 125 MGS / 300	49.54

Special shipping conditions apply, see pages 233-234.



Color-coated Aluminum



Schluter®-RONDEC

Color-coated aluminum (AC)							
Length = 2.5 m - 8' 2-1/2"							
H = mm - in.	Profile	\$ / Length	Outside corner, 90° (die cast)	Inside corner, 90° (die cast)	\$ / Unit	Connector	\$ / Unit
6 - 1/4	RO 60 + color*	23.41	ED/RO 60 + color*	ID/RO 60 + color*	5.28	V/RO 60	2.92
8 - 5/16	RO 80 + color*	26.22	ED/RO 80 + color*	ID/RO 80 + color*	5.28	V/RO 80	2.92
10 - 3/8	RO 100 + color*	28.76	ED/RO 100 + color*	ID/RO 100 + color*	5.28	V/RO 100	2.92
12.5 - 1/2	RO 125 + color*	35.94	ED/RO 125 + color*	ID/RO 125 + color*	5.28	V/RO 125	2.92

*Color Codes

BW	W	SP	BH	HB	HG	PG	G	GM	SB	GS
Bright white	White	Sand pebble	Bahama	Light beige	Light grey	Classic grey	Grey	Metallic grey	Black brown	Black

* To complete the item number, add the color code (e.g., RO 60 G).

PVC



PVC (P)					
Length = 2.5 m - 8' 2-1/2"					
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	Inside corner, 90°	\$ / Unit
6 - 1/4	PRO 60 + color*	8.12	E/PRO 60 + color*	I/PRO 60 + color*	3.21
8 - 5/16	PRO 80 + color*	8.55	E/PRO 80 + color*	I/PRO 80 + color*	3.21
10 - 3/8	PRO 100 + color*	9.12	E/PRO 100 + color*	I/PRO 100 + color*	3.21
11 - 7/16	PRO 110 + color*	10.24	E/PRO 110 + color*	I/PRO 110 + color*	3.21
12.5 - 1/2	PRO 125 + color*	11.40	E/PRO 125 + color*	I/PRO 125 + color*	3.21

*Color Codes

BW	W	SP	BH	HB	HG	PG	G	GS
Bright white	White	Sand pebble	Bahama	Light beige	Light grey	Classic grey	Grey	Black

* To complete the item number, add the color code (e.g., PRO 60 G).



RONDEC in matte white (page 55)