







Schluter®-JOLLY

Schluter®-JOLLY is a decorative profile featuring a 90° angle designed to finish and protect external corners and other tile edges in wall applications. Its 90° angle creates a clean, flush look on wall corner installations, and the joint spacers on both sides of the profile ensure consistent grout joints and perfect symmetry. Matching corners are available, which feature innovative plug-in connections that result in clean, visually appealing corner applications.

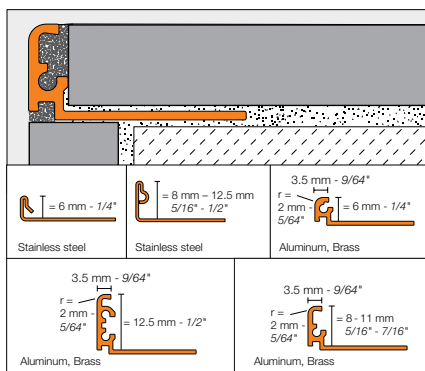

Stainless Steel

Schluter®-JOLLY				
Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 EB	47.29	EV / J 60 EB	23.30
8 - 5/16	J 80 EB	49.09	EV / J 80 EB	23.30
10 - 3/8	J 100 EB	51.75	EV / J 100 EB	23.30
11 - 7/16	J 110 EB	53.50	EV / J 110 EB	23.30
12.5 - 1/2	J 125 EB	53.54	EV / J 125 EB	23.30

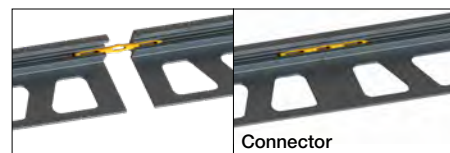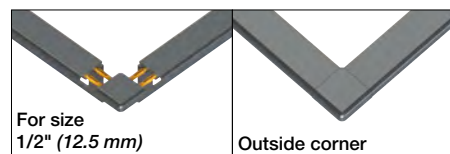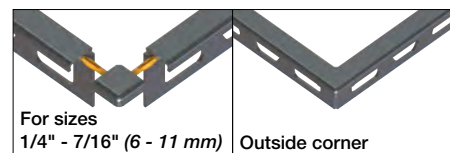

Brass

Schluter®-JOLLY				
Length = 2.5 m - 8' 2-1/2"	Chrome-plated solid brass (MC) *			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 MC	93.55	EV / J 60 MC	22.29
8 - 5/16	J 80 MC	96.82	EV / J 80 MC	22.29
10 - 3/8	J 100 MC	98.07	EV / J 100 MC	22.29
11 - 7/16	J 110 MC	99.05	EV / J 110 MC	22.29
12.5 - 1/2	J 125 MC	99.71	EV / J 125 MC	22.29

Connector	Quantity	\$ / Pkg.
V / J PP4	4	2.94



Note: The anchoring leg of **Schluter®-JOLLY** is available with a special radius perforation so that the profile can be used to form curves.

- Price surcharge: \$0.70 per foot
- Chrome-plated brass requires a relatively large bending radius
- Item No.: R / Profile No. (e.g., R/J 60 EB)
- For delivery time, please call Customer Service





Anodized Aluminum

Schluter®-JOLLY								
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)				Polished chrome anodized aluminum (ACG)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 AE	16.86	EV / J 60 AE	8.88	J 60 ACG	19.70	EV / J 60 ACG	11.62
8 - 5/16	J 80 AE	16.75	EV / J 80 AE	8.88	J 80 ACG	21.06	EV / J 80 ACG	11.62
10 - 3/8	J 100 AE	17.77	EV / J 100 AE	8.88	J 100 ACG	23.30	EV / J 100 ACG	11.62
11 - 7/16	J 110 AE	18.92	EV / J 110 AE	8.88	J 110 ACG	23.52	EV / J 110 ACG	11.62
12.5 - 1/2	J 125 AE	19.04	EV / J 125 AE	8.88	J 125 ACG	24.64	EV / J 125 ACG	11.62

Length = 2.5 m - 8' 2-1/2"	Brushed chrome anodized aluminum (ACGB)				Satin nickel anodized aluminum (AT)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 ACGB	21.06	EV / J 60 ACGB	11.62	J 60 AT	20.04	EV / J 60 AT	11.62
8 - 5/16	J 80 ACGB	21.63	EV / J 80 ACGB	11.62	J 80 AT	20.46	EV / J 80 AT	11.62
10 - 3/8	J 100 ACGB	23.93	EV / J 100 ACGB	11.62	J 100 AT	20.85	EV / J 100 AT	11.62
11 - 7/16	J 110 ACGB	24.41	EV / J 110 ACGB	11.62	J 110 AT	21.06	EV / J 110 AT	11.62
12.5 - 1/2	J 125 ACGB	25.27	EV / J 125 ACGB	11.62	J 125 AT	21.55	EV / J 125 AT	11.62

Length = 2.5 m - 8' 2-1/2"	Polished nickel anodized aluminum (ATG)				Brushed nickel anodized aluminum (ATGB)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 ATG	25.94	EV / J 60 ATG	11.62	J 60 ATGB	23.28	EV / J 60 ATGB	11.62
8 - 5/16	J 80 ATG	26.34	EV / J 80 ATG	11.62	J 80 ATGB	23.55	EV / J 80 ATGB	11.62
10 - 3/8	J 100 ATG	27.04	EV / J 100 ATG	11.62	J 100 ATGB	24.04	EV / J 100 ATGB	11.62
11 - 7/16	J 110 ATG	27.17	EV / J 110 ATG	11.62	J 110 ATGB	24.29	EV / J 110 ATGB	11.62
12.5 - 1/2	J 125 ATG	27.26	EV / J 125 ATG	11.62	J 125 ATGB	25.10	EV / J 125 ATGB	11.62

Length = 2.5 m - 8' 2-1/2"	Satin copper anodized aluminum (AK)				Polished copper anodized aluminum (AKG)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 AK	20.04	EV / J 60 AK	11.62	J 60 AKG	25.94	EV / J 60 AKG	11.62
8 - 5/16	J 80 AK	20.85	EV / J 80 AK	11.62	J 80 AKG	26.34	EV / J 80 AKG	11.62
10 - 3/8	J 100 AK	21.26	EV / J 100 AK	11.62	J 100 AKG	27.04	EV / J 100 AKG	11.62
11 - 7/16	J 110 AK	21.48	EV / J 110 AK	11.62	J 110 AKG	27.17	EV / J 110 AKG	11.62
12.5 - 1/2	J 125 AK	21.96	EV / J 125 AK	11.62	J 125 AKG	27.26	EV / J 125 AKG	11.62

Length = 2.5 m - 8' 2-1/2"	Brushed copper anodized aluminum (AKGB)				Satin brass anodized aluminum (AM)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 AKGB	23.28	EV / J 60 AKGB	11.62	J 60 AM	16.81	EV / J 60 AM	11.62
8 - 5/16	J 80 AKGB	24.01	EV / J 80 AKGB	11.62	J 80 AM	17.47	EV / J 80 AM	11.62
10 - 3/8	J 100 AKGB	24.51	EV / J 100 AKGB	11.62	J 100 AM	19.49	EV / J 100 AM	11.62
11 - 7/16	J 110 AKGB	24.76	EV / J 110 AKGB	11.62	J 110 AM	19.88	EV / J 110 AM	11.62
12.5 - 1/2	J 125 AKGB	25.10	EV / J 125 AKGB	11.62	J 125 AM	20.81	EV / J 125 AM	11.62

**Schluter®-JOLLY**

Length = 2.5 m - 8' 2-1/2"		Polished brass anodized aluminum (AMG)			Brushed brass anodized aluminum (AMGB)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 AMG	19.70	EV / J 60 AMG	11.62	J 60 AMGB	22.40	EV / J 60 AMGB	11.62
8 - 5/16	J 80 AMG	21.06	EV / J 80 AMG	11.62	J 80 AMGB	23.17	EV / J 80 AMGB	11.62
10 - 3/8	J 100 AMG	23.75	EV / J 100 AMG	11.62	J 100 AMGB	24.86	EV / J 100 AMGB	11.62
11 - 7/16	J 110 AMG	24.23	EV / J 110 AMG	11.62	J 110 AMGB	25.36	EV / J 110 AMGB	11.62
12.5 - 1/2	J 125 AMG	25.12	EV / J 125 AMG	11.62	J 125 AMGB	26.18	EV / J 125 AMGB	11.62

Length = 2.5 m - 8' 2-1/2"		Brushed antique bronze anodized aluminum (ABGB)			Bright black anodized aluminum (AGSG)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 ABGB	24.87	EV / J 60 ABGB	11.62	J 60 AGSG	20.06	EV / J 60 AGSG	11.62
8 - 5/16	J 80 ABGB	26.16	EV / J 80 ABGB	11.62	J 80 AGSG	20.47	EV / J 80 AGSG	11.62
10 - 3/8	J 100 ABGB	26.96	EV / J 100 ABGB	11.62	J 100 AGSG	21.97	EV / J 100 AGSG	11.62
11 - 7/16	J 110 ABGB	27.76	EV / J 110 ABGB	11.62	J 110 AGSG	22.19	EV / J 110 AGSG	11.62
12.5 - 1/2	J 125 ABGB	29.20	EV / J 125 ABGB	11.62	J 125 AGSG	22.66	EV / J 125 AGSG	11.62

Length = 2.5 m - 8' 2-1/2"		Brushed graphite anodized aluminum (AGRB)		
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 AGRB	24.87	EV / J 60 AGRB	11.62
8 - 5/16	J 80 AGRB	26.16	EV / J 80 AGRB	11.62
10 - 3/8	J 100 AGRB	27.48	EV / J 100 AGRB	11.62
11 - 7/16	J 110 AGRB	28.03	EV / J 110 AGRB	11.62
12.5 - 1/2	J 125 AGRB	29.20	EV / J 125 AGRB	11.62

10-foot (3.05 m) JOLLY Profiles – Anodized Aluminum

Length = 3.05 m - 10'	Satin anodized aluminum (AE)		Polished chrome anodized aluminum (ACG)		Satin nickel anodized aluminum (AT)		Brushed antique bronze anodized aluminum (ABGB)	
H = mm - in.	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length
8 - 5/16	J 80 AE / 300	20.94	J 80 ACG / 300	26.33	J 80 AT / 300	25.59	J 80 ABGB / 300	32.70
10 - 3/8	J 100 AE / 300	22.21	J 100 ACG / 300	29.11	J 100 AT / 300	26.07	J 100 ABGB / 300	33.70
12.5 - 1/2	J 125 AE / 300	23.81	J 125 ACG / 300	30.79	J 125 AT / 300	26.93	J 125 ABGB / 300	36.49

Special shipping conditions apply, see pages 233-234.

Connector	Quantity	\$ / Pkg.
V / J PP4	4	2.94



Note: The anchoring leg of **Schluter®-JOLLY** is available with a special radius perforation so that the profile can be used to form curves.

- Price surcharge: \$0.70 per foot
- Polished aluminum finishes require a relatively large bending radius
- Item No.: R / Profile No. (e.g., R/J 60 ACGB)
- For delivery time, please call Customer Service





Schluter®-TRENDLINE Textured Color-coated Aluminum

Schluter®-JOLLY				
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 + color*	35.46	EV / J 60 + color*	16.77
8 - 5/16	J 80 + color*	36.25	EV / J 80 + color*	16.77
10 - 3/8	J 100 + color*	36.95	EV / J 100 + color*	16.77
11 - 7/16	J 110 + color*	37.34	EV / J 110 + color*	16.77
12.5 - 1/2	J 125 + color*	38.07	EV / J 125 + color*	16.77

*Color Codes					
TSI	TSBG	TSSG	TSC	TSB	TSR
Ivory	Greige	Stone gray	Cream	Beige	Rustic brown
TSOB	TSG	TSLA	TSDA		
Bronze	Pewter	Light anthracite	Dark anthracite		

* To complete the item number, add the color code (e.g., J 60 TSC).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Matte color-coated aluminum			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 + color*	28.37	EV / J 60 + color*	15.11
8 - 5/16	J 80 + color*	29.00	EV / J 80 + color*	15.11
10 - 3/8	J 100 + color*	29.56	EV / J 100 + color*	15.11
11 - 7/16	J 110 + color*	29.87	EV / J 110 + color*	15.11
12.5 - 1/2	J 125 + color*	30.46	EV / J 125 + color*	15.11

*Color Codes		* To complete the item number, add the color code (e.g., J 60 MGS).
MBW	MGS	
Matte white	Matte black	

10-foot (3.05 m) JOLLY Profiles – Textured Color-coated Aluminum						
Length = 3.05 m - 10'	Textured color-coated aluminum (TS)		Matte white (MBW)		Matte black (MGS)	
H = mm - in.	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length
6 - 1/4	J 60 + color* / 300	42.56	J 60 MBW / 300	34.05	J 60 MGS / 300	34.05
8 - 5/16	J 80 + color* / 300	43.51	J 80 MBW / 300	34.79	J 80 MGS / 300	34.79
10 - 3/8	J 100 + color* / 300	44.35	J 100 MBW / 300	35.47	J 100 MGS / 300	35.47
11 - 7/16	J 110 + color* / 300	44.81	J 110 MBW / 300	35.85	J 110 MGS / 300	35.85
12.5 - 1/2	J 125 + color* / 300	45.69	J 125 MBW / 300	36.55	J 125 MGS / 300	36.55

Special shipping conditions apply, see pages 233-234.

Color-coated Aluminum

Length = 2.5 m - 8' 2-1/2"	Color-coated aluminum			
H = mm - in.	Profile	\$ / Length	Outside corner	\$ / Unit
6 - 1/4	J 60 + color*	20.06	EV / J 60 + color*	10.80
8 - 5/16	J 80 + color*	20.47	EV / J 80 + color*	10.80
10 - 3/8	J 100 + color*	21.97	EV / J 100 + color*	10.80
11 - 7/16	J 110 + color*	22.32	EV / J 110 + color*	10.80
12.5 - 1/2	J 125 + color*	22.66	EV / J 125 + color*	10.80

*Color Codes					
BW	W	SP	PG	G	GM
Bright white	White	Sand pebble	Classic grey	Grey	Metallic grey
SB	GS				
Black brown	Black				

* To complete the item number, add the color code (e.g., J 60 G).

Connector	Quantity	\$ / Pkg.
V / J PP4	4	2.94



Note: The anchoring leg of Schluter®-JOLLY is available with a special radius perforation so that the profile can be used to form curves.

- Price surcharge: \$0.70 per foot
- Color-coated aluminum profiles require a relatively large bending radius
- Item No.: R / Profile No. (e.g., R/J 80 TSC)
- For delivery time, please call Customer Service




R = Radius



JOLLY in matte black (page 46)

Schluter®-JOLLY-P

Schluter®-JOLLY-P is a PVC profile featuring an 87° angle designed to finish and protect external corners and other tile edges in wall applications. The vertical wall section of the profile provides a decorative finish and protects adjacent tiles. JOLLY-P in sizes 5/16" (8 mm) and higher features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.

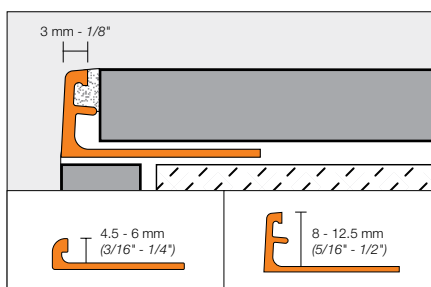

*Color Codes



* To complete the item number, add the **color** code (e.g., **G 45**).

Schluter®-JOLLY-P

Length = 2.5 m - 8' 2-1/2"			PVC
H = mm - in.	Item No.	\$ / Length	
4.5 - 3/16	color* + 45	6.52	
6 - 1/4	color* + 60	6.63	
8 - 5/16	color* + 80	6.93	
10 - 3/8	color* + 100	7.08	
11 - 7/16	color* + 110	7.28	
12.5 - 1/2	color* + 125	7.47	

10-foot (3.05 m) JOLLY-P Profiles – PVC

Length = 3.05 m - 10'			Bright white (BW)
H = mm - in.	Item No.	\$ / Length	
8 - 5/16	BW 80 / 300	8.64	
10 - 3/8	BW 100 / 300	8.85	
12.5 - 1/2	BW 125 / 300	9.33	

Special shipping conditions apply, see pages 233-234.

Get perfect cuts!


Schluter®-SNIPS for PVC profiles.
See page 223 for more information.





Schluter®-RONDEC


Schluter®-RONDEC is a finishing and edge-protection profile for tiled edges and outside corners of tiled surfaces. The reveal of the profile forms a symmetrically rounded corner along the surface edge. RONDEC allows for color coordination with tile and grout and the creation of interesting accents in decorative designs. The profile can be combined with the DESIGNLINE border profile for further design options. RONDEC in aluminum and PVC features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.

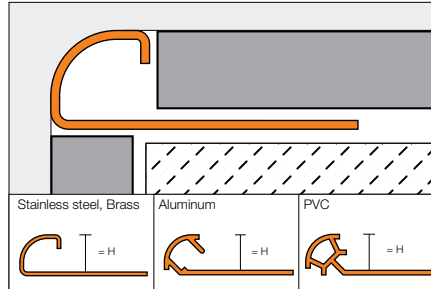


Accessories



90° Outside corner



90° Inside corner



RONDEC prefabricated corners eliminate the need for a mitered edge.

EV/



ED/



Corners with item numbers beginning with EV/ are milled out of solid aluminum and corners with item numbers beginning with ED/ are die cast metal.

90° Double-leg outside corner (E2L/)



90° Double-leg inside corner (I2L/)



Double-leg corners simplify the framing of smaller elements with the RONDEC profile, such as niches, windows, etc. The legs are detachable for use in applications where a single-leg corner is needed.

Sink corner with 3/8" (10 mm) radius (I2S/)



Sink corner with 1-1/2" (38 mm) radius (ISK/)



Stainless steel sink corners are used with the RONDEC profile to produce tiled-under sinks. The corners have a large radius (3/8" - 10 mm or 1-1/2" - 38 mm) that allows them to match up to the contour of most standard sinks. The 3/8" corner piece features a double-leg design for ease of installation, while the 1-1/2" corner includes two stainless steel connectors to maintain the alignment of the corner piece and profiles during installation.

Connector Stainless Steel (V/)



Connector PVC (V/)



RONDEC connectors simplify the alignment of adjacent profile sections. Connectors are made of either PVC for aluminum profiles or stainless steel for stainless steel profiles.

End cap



End caps feature a bendable leg that is inserted into the RONDEC profile, and a brushed stainless steel plate that covers the open area of the profile in applications where the end of the profile is to be left exposed. RONDEC end caps can be used with stainless steel and brushed stainless steel RONDEC profiles.

