





Schluter®-QUADEC

Schluter®-QUADEC is a finishing and edge-protection profile for tiled edges and outside corners of tiled surfaces. The reveal of the profile forms a square outer corner along the surface edge. QUADEC allows for modern decorative design and interesting contrasts. The profile can be combined with the QUADEC-FS feature strip profile and/or the DESIGNLINE border profile for further design options. QUADEC, in stainless steel, can also be used as a stair nosing or floor transition profile. QUADEC in aluminum and PVC feature an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.

Note: Also available in chrome-plated brass, and stainless steel 316L (1.4404 = V4A). Contact Customer Service for pricing and availability.

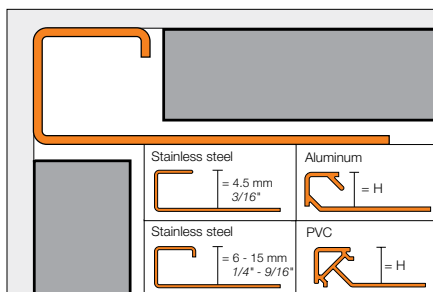

Inside/outside corner/end cap (EV/)



Stainless Steel 304 (1.4301 = V2A)

Schluter®-QUADEC						
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
4.5 - 3/16	Q 45 E	48.20	EV/Q 45 E	38.80	-	-
6 - 1/4	Q 60 E	55.34	EV/Q 60 E	42.54	V/RO 60 E	6.99
7 - 9/32	Q 70 E	57.42	EV/Q 70 E	43.14	-	-
8 - 5/16	Q 80 E	57.78	EV/Q 80 E	43.71	V/RO 80 E	6.99
9 - 11/32	Q 90 E	61.60	EV/Q 90 E	45.26	-	-
10 - 3/8	Q 100 E	62.06	EV/Q 100 E	47.21	V/RO 100 E	6.99
11 - 7/16	Q 110 E	64.23	EV/Q 110 E	47.93	V/RO 110 E	6.99
12.5 - 1/2	Q 125 E	66.11	EV/Q 125 E	48.45	V/RO 125 E	6.99
14 - 17/32	Q 140 E	70.81	EV/Q 140 E	50.37	-	-
15 - 9/16	Q 150 E	73.65	EV/Q 150 E	54.03	-	-

Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
6 - 1/4	Q 60 EB	81.41	EV/Q 60 EB	51.34	V/RO 60 E	6.99
7 - 9/32	Q 70 EB	84.49	EV/Q 70 EB	51.89	-	-
8 - 5/16	Q 80 EB	87.55	EV/Q 80 EB	52.41	V/RO 80 E	6.99
9 - 11/32	Q 90 EB	90.64	EV/Q 90 EB	54.25	-	-
10 - 3/8	Q 100 EB	94.03	EV/Q 100 EB	56.60	V/RO 100 E	6.99
11 - 7/16	Q 110 EB	97.31	EV/Q 110 EB	57.45	V/RO 110 E	6.99
12.5 - 1/2	Q 125 EB	100.17	EV/Q 125 EB	58.00	V/RO 125 E	6.99
14 - 17/32	Q 140 EB	102.70	EV/Q 140 EB	58.76	-	-
15 - 9/16	Q 150 EB	104.17	EV/Q 150 EB	60.34	-	-



Anodized Aluminum

Schluter®-QUADEC										
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)				Polished chrome anodized aluminum (ACG)				Connector	
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Item No.	\$ / Unit
4.5 - 3/16	Q 45 AE	20.01	EV/Q 45 AE	9.47	Q 45 ACG	25.14	EV/Q 45 ACG	11.24	-	-
6 - 1/4	Q 60 AE	20.85	EV/Q 60 AE	9.47	Q 60 ACG	26.19	EV/Q 60 ACG	11.24	V/Q 60	2.92
8 - 5/16	Q 80 AE	21.74	EV/Q 80 AE	9.47	Q 80 ACG	29.51	EV/Q 80 ACG	11.24	V/RO 80	2.92
10 - 3/8	Q 100 AE	23.50	EV/Q 100 AE	9.47	Q 100 ACG	32.54	EV/Q 100 ACG	11.24	V/RO 100	2.92
12.5 - 1/2	Q 125 AE	26.23	EV/Q 125 AE	9.47	Q 125 ACG	38.12	EV/Q 125 ACG	11.24	V/RO 125	2.92
15 - 9/16	Q 150 AE	29.60	EV/Q 150 AE	10.71	-	-	-	-	-	-
20 - 3/4	Q 200 AE	32.42	EV/Q 200 AE	10.71	-	-	-	-	-	-

Length = 2.5 m - 8' 2-1/2"	Satin nickel anodized aluminum (AT)				Brushed nickel anodized aluminum (ATGB)				Connector	
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Item No.	\$ / Unit
4.5 - 3/16	Q 45 AT	21.08	EV/Q 45 AT	9.30	-	-	-	-	-	-
6 - 1/4	Q 60 AT	21.96	EV/Q 60 AT	9.30	-	-	-	-	V/Q 60	2.92
8 - 5/16	Q 80 AT	23.46	EV/Q 80 AT	9.30	Q 80 ATGB	28.75	EV/Q 80 ATGB	17.20	V/RO 80	2.92
10 - 3/8	Q 100 AT	24.99	EV/Q 100 AT	9.30	Q 100 ATGB	31.99	EV/Q 100 ATGB	17.20	V/RO 100	2.92
12.5 - 1/2	Q 125 AT	27.83	EV/Q 125 AT	9.30	Q 125 ATGB	34.56	EV/Q 125 ATGB	17.20	V/RO 125	2.92

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anodized aluminum (ABGB)				Connector	
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Item No.	\$ / Unit
6 - 1/4	Q 60 ABGB	28.14	EV/Q 60 ABGB	17.20	V/Q 60	2.92
8 - 5/16	Q 80 ABGB	28.75	EV/Q 80 ABGB	17.20	V/RO 80	2.92
10 - 3/8	Q 100 ABGB	31.99	EV/Q 100 ABGB	17.20	V/RO 100	2.92
12.5 - 1/2	Q 125 ABGB	34.56	EV/Q 125 ABGB	17.20	V/RO 125	2.92

10-foot (3.05 m) QUADEC Profiles – Anodized Aluminum		
Length = 3.05 m - 10'	Polished chrome anodized aluminum (ACG)	
H = mm - in.	Profile	\$ / Length
8 - 5/16	Q 80 ACG / 300	36.90
10 - 3/8	Q 100 ACG / 300	40.68
12.5 - 1/2	Q 125 ACG / 300	47.66

Special shipping conditions apply, see pages 233-234.



Schluter®-TRENDLINE Textured Color-coated Aluminum

Schluter®-QUADEC						
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
4.5 - 3/16	Q 45 + color*	44.71	EV/Q 45 + color*	17.87	-	-
6 - 1/4	Q 60 + color*	45.60	EV/Q 60 + color*	17.87	V/Q 60	2.92
8 - 5/16	Q 80 + color*	46.54	EV/Q 80 + color*	17.87	V/RO 80	2.92
10 - 3/8	Q 100 + color*	47.79	EV/Q 100 + color*	17.87	V/RO 100	2.92
11 - 7/16	Q 110 + color*	48.45	EV/Q 110 + color*	17.87	V/RO 110	2.92
12.5 - 1/2	Q 125 + color*	48.92	EV/Q 125 + color*	17.87	V/RO 125	2.92



*Color Codes

TSI	TSBG	TSSG	TSC	TSB	TSR	TSOB	TSG	TSLA	TSDA
Ivory	Greige	Stone grey	Cream	Beige	Rustic brown	Bronze	Pewter	Light anthracite	Dark anthracite

* To complete the item number, add the color code (e.g., Q 60 TSC).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Matte color-coated aluminum					
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Connector	\$ / Unit
4.5 - 3/16	Q 45 + color*	35.42	EV/Q 45 + color*	17.87	-	-
6 - 1/4	Q 60 + color*	36.14	EV/Q 60 + color*	17.87	V/Q 60	2.92
8 - 5/16	Q 80 + color*	36.88	EV/Q 80 + color*	17.87	V/RO 80	2.92
10 - 3/8	Q 100 + color*	38.08	EV/Q 100 + color*	17.87	V/RO 100	2.92
11 - 7/16	Q 110 + color*	38.52	EV/Q 110 + color*	17.87	V/RO 110	2.92
12.5 - 1/2	Q 125 + color*	38.90	EV/Q 125 + color*	17.87	V/RO 125	2.92

*Color Codes

MBW	MGS
Matte white	Matte black

* To complete the item number, add the color code (e.g., Q 60 MGS).

10-foot (3.05 m) QUADEC Profiles – Textured Color-coated Aluminum

Length = 3.05 m - 10'	Textured color-coated aluminum (TS)		Matte white (MBW)		Matte black (MGS)	
H = mm - in.	Profile	\$ / Length	Profile	\$ / Length	Profile	\$ / Length
6 - 1/4	Q 60 + color* / 300	57.00	Q 60 MBW / 300	45.17	Q 60 MGS / 300	45.17
8 - 5/16	Q 80 + color* / 300	58.16	Q 80 MBW / 300	46.11	Q 80 MGS / 300	46.11
10 - 3/8	Q 100 + color* / 300	59.73	Q 100 MBW / 300	47.60	Q 100 MGS / 300	47.60
11 - 7/16	Q 110 + color* / 300	60.56	Q 110 MBW / 300	48.14	Q 110 MGS / 300	48.14
12.5 - 1/2	Q 125 + color* / 300	61.17	Q 125 MBW / 300	48.61	Q 125 MGS / 300	48.61

Special shipping conditions apply, see pages 233-234.



Color-coated Aluminum

Schluter®-QUADEC				
Length = 2.5 m - 8' 2-1/2"	Color-coated aluminum (AC)			
H = mm - in.	Profile	\$ / Length	Outside corner, 90° (die cast)	\$ / Unit
4.5 - 3/16	Q 45 + color*	21.59	ED/Q 45 + color*	5.19
6 - 1/4	Q 60 + color*	23.21	ED/Q 60 + color*	5.19
8 - 5/16	Q 80 + color*	24.54	ED/Q 80 + color*	5.19
10 - 3/8	Q 100 + color*	25.90	ED/Q 100 + color*	5.19
11 - 7/16	Q 110 + color*	26.70	ED/Q 110 + color*	5.19
12.5 - 1/2	Q 125 + color*	28.34	ED/Q 125 + color*	5.19

*Color Codes



* To complete the item number, add the color code (e.g., Q 45 PG).

PVC

Length = 2.5 m - 8' 2-1/2"	PVC (P)			
H = mm - in.	Profile	\$ / Length	Outside corner, 90°	\$ / Unit
6 - 1/4	PQ 60 + color*	8.47	E/PQ 60 + color*	3.16
8 - 5/16	PQ 80 + color*	8.90	E/PQ 80 + color*	3.16
10 - 3/8	PQ 100 + color*	9.51	E/PQ 100 + color*	3.16
11 - 7/16	PQ 110 + color*	10.71	E/PQ 110 + color*	3.16
12.5 - 1/2	PQ 125 + color*	11.90	E/PQ 125 + color*	3.16

*Color Codes



* To complete the item number, add the color code (e.g., PQ 80 PG).





QUADEC in cream (page 59)



Schluter®-QUADEC-FS

Schluter®-QUADEC-FS is a double-rail feature strip profile that features a recessed section to which field or accent tile is bonded. The profile can be used to produce accents in tile fields on walls, chair rails, and various other decorative applications. The profile can be combined with the QUADEC finishing and edge-protection profile. QUADEC-FS features integrated joint spacers that establish defined joint cavities between the accent tile and the profile.

Note: The universal accessory piece can be used to produce a 90° inside corner, 90° outside corner, and end cap.

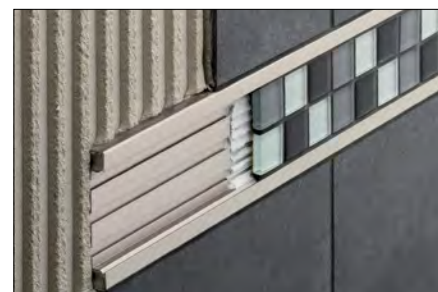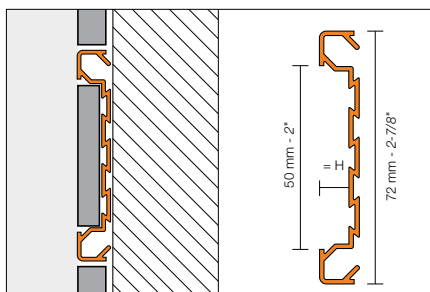

Inside/outside corner /
End cap (EV/)



Schluter®-QUADEC-FS

Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)				Polished chrome anod. alu. (ACG)				
	H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Profile	\$ / Length	Inside/outside corner	\$ / Unit
8 - 5/16		QF8/50 AE	42.46	EV/QF8/50 AE	28.35	QF8/50 ACG	56.47	EV/QF8/50 ACG	33.56

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)				Brushed antique bronze anod. alu. (ABGB)			
H = mm - in.	Profile	\$ / Length	Inside/outside corner	\$ / Unit	Profile	\$ / Length	Inside/outside corner	\$ / Unit
8 - 5/16	QF8/50 AT	44.97	EV/QF8/50 AT	28.35	QF8/50 ABGB	60.92	EV/QF8/50 ABGB	36.38