





È vietato consegnare a terzi o riprodurre questo documento, utilizzarne il contenuto o renderlo comunque noto a terzi senza esplicita autorizzazione. Ogni infrazione comporta il risarcimento dei danni subiti. Sono riservati tutti i diritti derivanti dalla concessione di brevetti per invenzioni industriali di utilità o di brevetti per modelli ornamentali.

Sin nuestra expresa autorización, queda terminantemente prohibida la reproducción total o parcial de este documento, así como su uso indebido y/o su exhibición o comunicación a terceros. De los infractores se exigirá el correspondiente resarcimiento de daños y perjuicios. Quedan reservados todos los derechos inherentes, en especial los de patentes, de modelos registrados y estéticos.

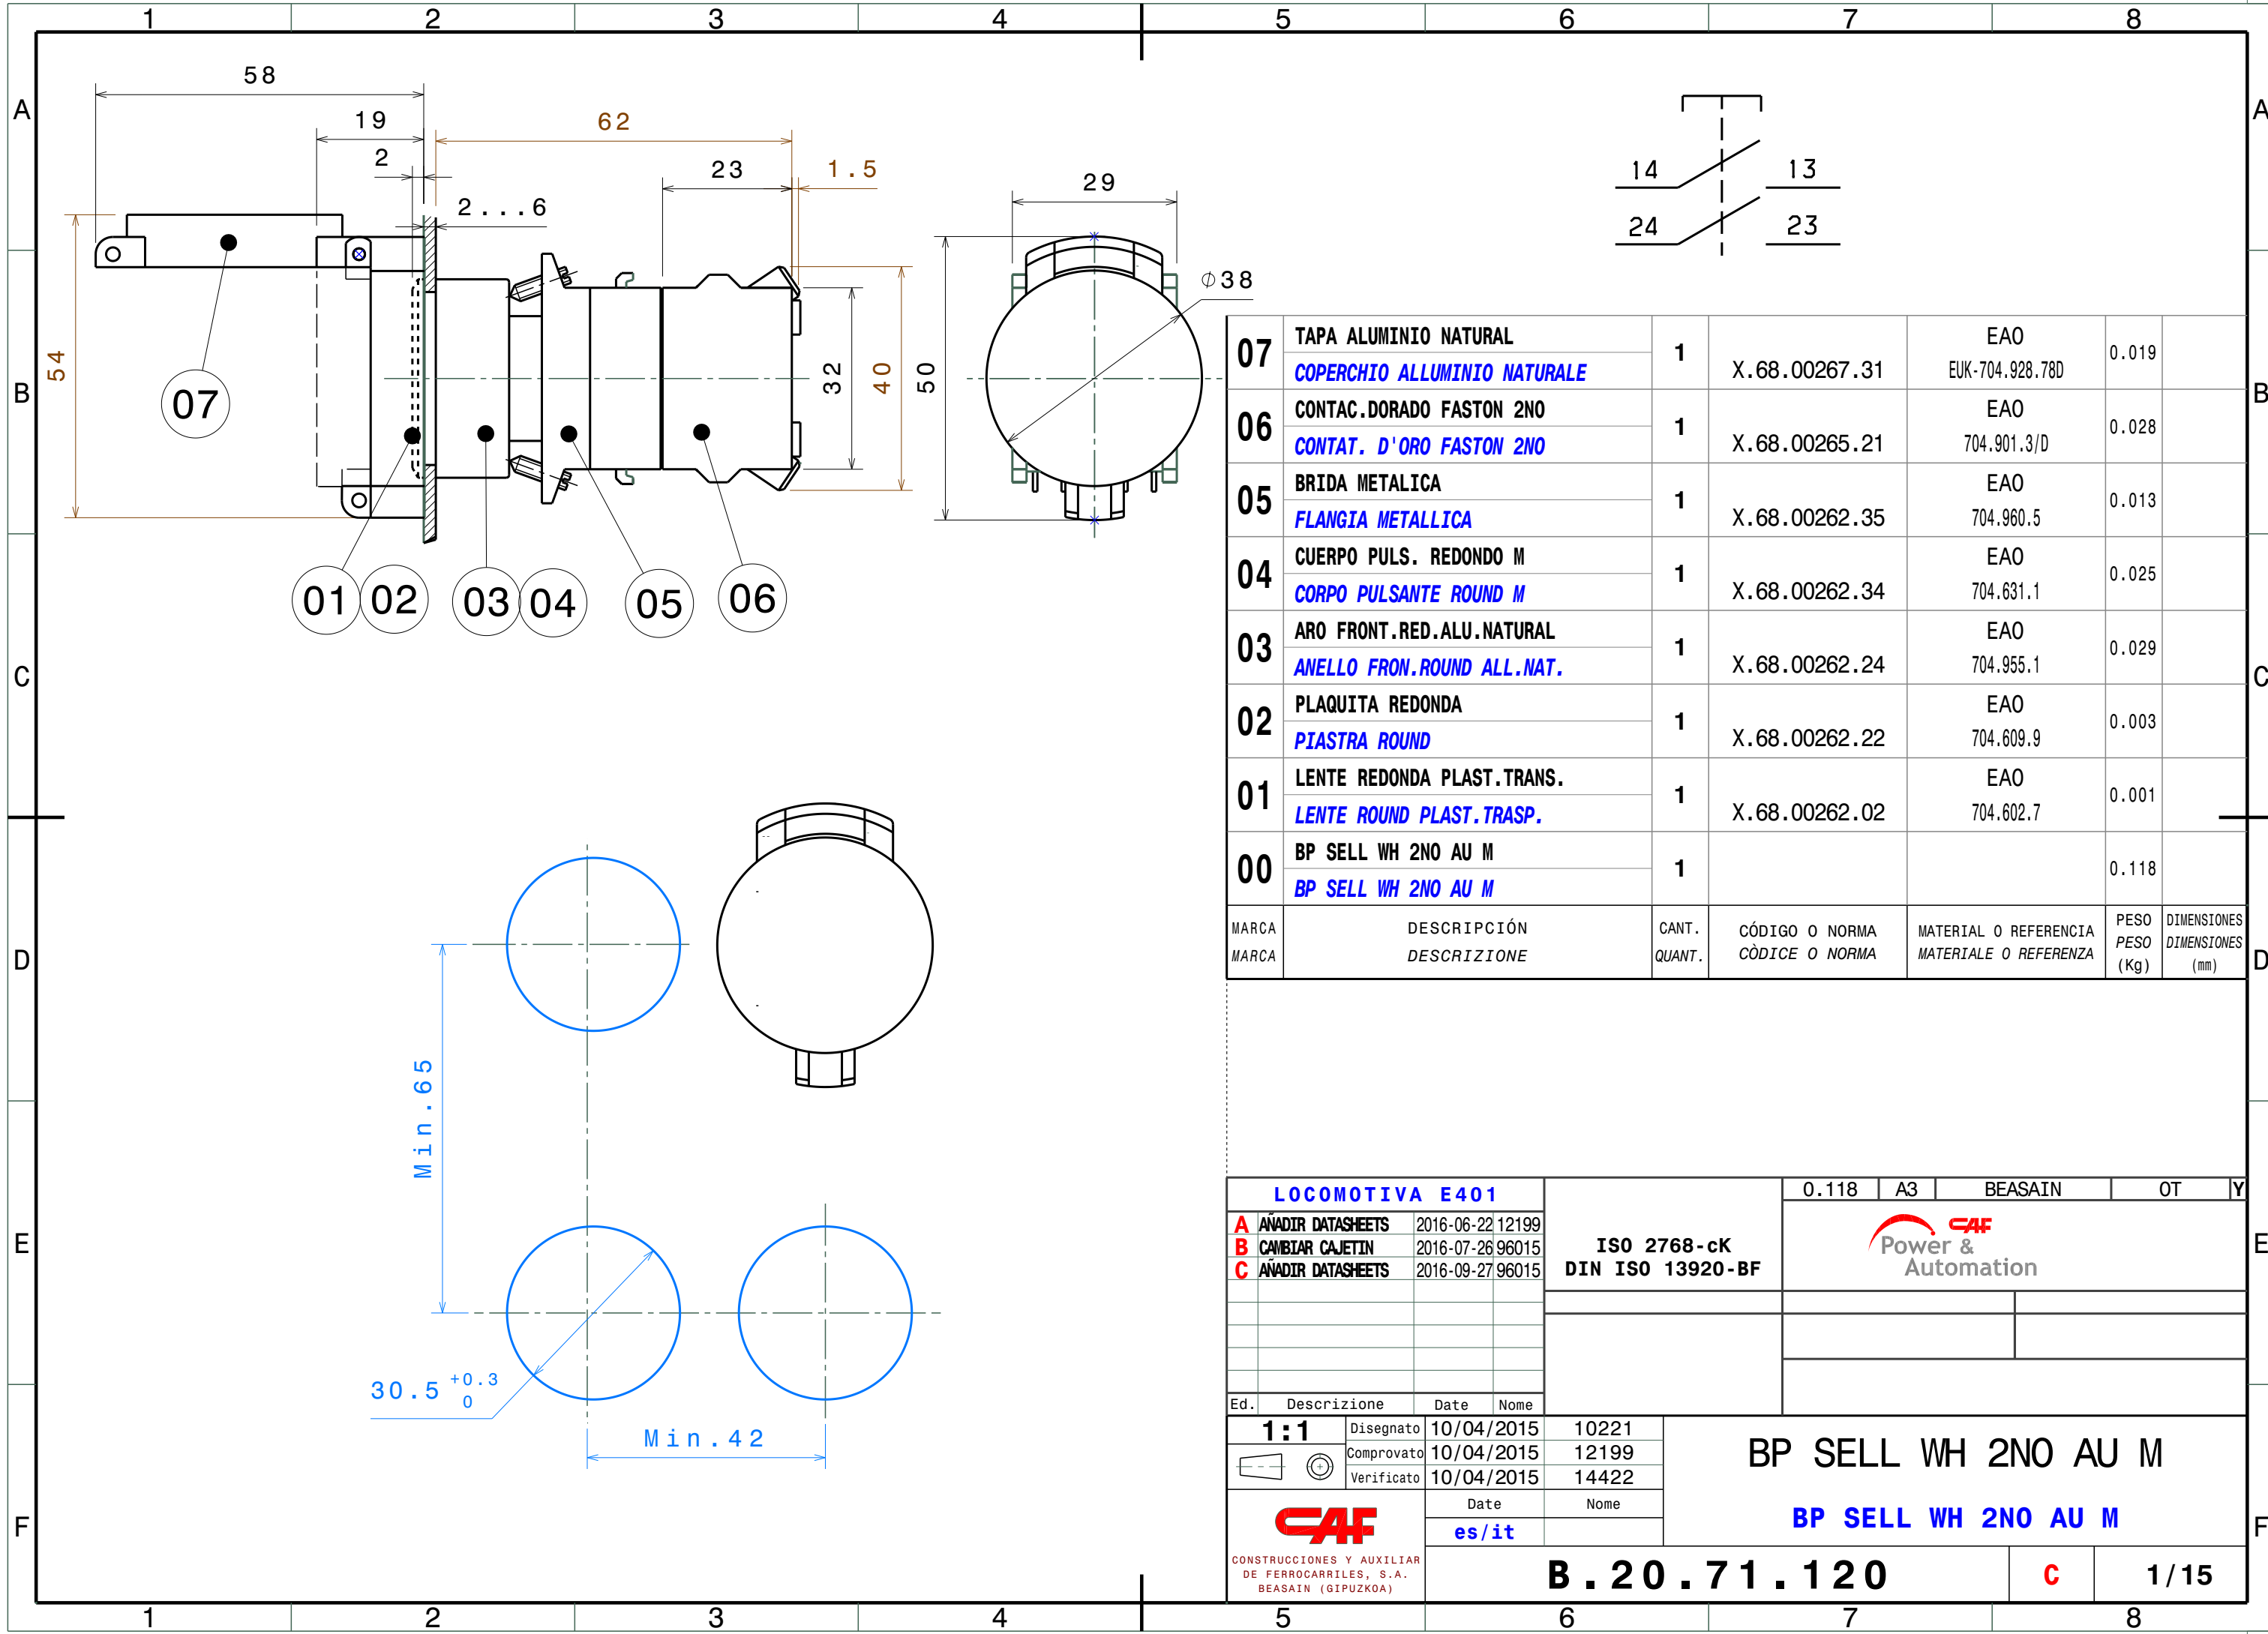

07	TAPA ALUMINIO NATURAL	1	X.68.00267.31	EAO EUK-704.928.78D	0.019	
	COPERCHIO ALLUMINIO NATURALE					
06	CONTAC.DORADO FASTON 2NO	1	X.68.00265.21	EAO 704.901.3/D	0.028	
	CONTAT. D'ORO FASTON 2NO					
05	BRIDA METALICA	1	X.68.00262.35	EAO 704.960.5	0.013	
	FLANGIA METALLICA					
04	CUERPO PULS. REDONDO M	1	X.68.00262.34	EAO 704.631.1	0.025	
	CORPO PULSANTE ROUND M					
03	ARO FRONT.RED.ALU.NATURAL	1	X.68.00262.24	EAO 704.955.1	0.029	
	ANELLO FRON.ROUND ALL.NAT.					
02	PLAQUITA REDONDA	1	X.68.00262.22	EAO 704.609.9	0.003	
	PIASTRA ROUND					
01	LENTE REDONDA PLAST.TRANS.	1	X.68.00262.02	EAO 704.602.7	0.001	
	LENTE ROUND PLAST.TRASP.					
00	BP SELL WH 2NO AU M	1			0.118	
	BP SELL WH 2NO AU M					
MARCA	DESCRIPCIÓN	CANT.	CÓDIGO O NORMA	MATERIAL O REFERENCIA	PESO	DIMENSIONES
MARCA	DESCRIZIONE	QUANT.	CÓDICE O NORMA	MATERIALE O REFERENZA	PESO (Kg)	DIMENSIONES (mm)

LOCOMOTIVA E401				ISO 2768-cK DIN ISO 13920-BF		0.118		A3	BEASAIN	OT	Y
A	AÑADIR DATASHEETS	2016-06-22	12199			<div> Power & Automation</div>					
B	CAMBIAR CAJETIN	2016-07-26	96015								
C	AÑADIR DATASHEETS	2016-09-27	96015								
Ed.	Descrizione	Date	Nome								
	1:1	Disegnato	10/04/2015	10221	BP SELL WH 2NO AU M						
	Comprovato	10/04/2015	12199								
	Verificato	10/04/2015	14422								
		Date	Nome	BP SELL WH 2NO AU M							
		es/it									
CONSTRUCCIONES Y AUXILIAR DE FERROCARRILES, S.A. BEASAIN (GIPUZKOA)				B . 20 . 71 . 120				C	1/15		

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.631.1 - Illuminated pushbutton actuator round



Attention: The preview is based on a sample product. This can differ from your current configuration.

necessary components



704.955.1

Front bezel set for indicator and pushbutton, flush design



704.602.7

Lens plastic round flat



704.609.9

Marking plate for lens round flat



704.960.5

Bayonet flange

EAO – Your Expert Partner for **Human Machine Interfaces**

704.631.1 - Illuminated pushbutton actuator round

EAO – Your Expert Partner for **Human Machine Interfaces**

704.631.1 - Illuminated pushbutton actuator round

necessary components




704.901.3/D
Switching element

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.631.1 - Illuminated pushbutton actuator round



Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight 0.009 kg

IP-Rating

Front protection IP 65

Actuator

Housing material Plastic
Housing colour grey
Switching action Momentary


Function

Illuminated pushbutton

EAO – Your Expert Partner for Human Machine Interfaces


704.631.1 - Illuminated pushbutton actuator round

Dimensions




X = Screw terminal

Mounting cut-outs



PIT = Push-in terminal

Wiring diagram



Additional information

Max. 3 switching elements can be clipped on

Legend

Switching action: B = Momentary

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.955.1 - Front bezel set for indicator and pushbutton, flush design



Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out
Design

Ø 30.5 mm
flush

Front

Front shape
Front dimension
Front ring material
Front ring colour

round
Ø 35 mm
Aluminium
natural anodized

Other Attributes


Weight

0.015 kg

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

Mounting cut-outs

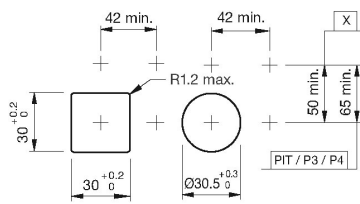

PIT = Push-in terminal

Additional information

The colour of anodized aluminium parts can vary due to technical production reasons

Legend

Switching action: B = Momentary

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.602.7 - Lens plastic round flat



Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight	0.001 kg
Dimension	Ø 23.7 mm
height	round, flush

Operating-/Indication part

Lens optics	transparent
Lens colour	colourless
Lens material	Plastic
Lens profile	flat
Lens illumination	illuminative

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.609.9 - Marking plate for lens round flat



Attention: The preview is based on a sample product. This can differ from your current configuration.


Other Attributes

Weight	0.001 kg
Marking plate material	Plastic
Marking plate colour	white
Marking plate optics	translucent
Marking plate illumination height	LED and filament lamp round, flush

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.960.5 - Bayonet flange

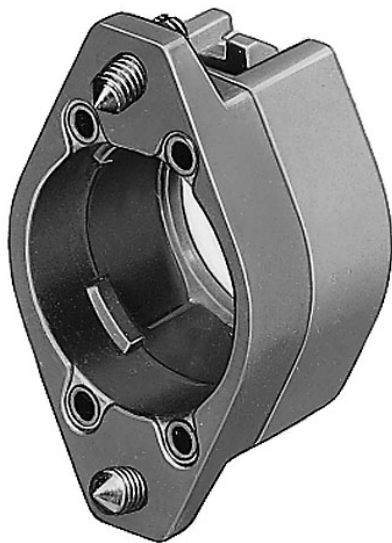

Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes


Material
Weight

Metal
0.025 kg

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

Dimensions



X = Screw terminal


Legend

Switching action: B = Momentary

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

704.901.3/D - Switching element

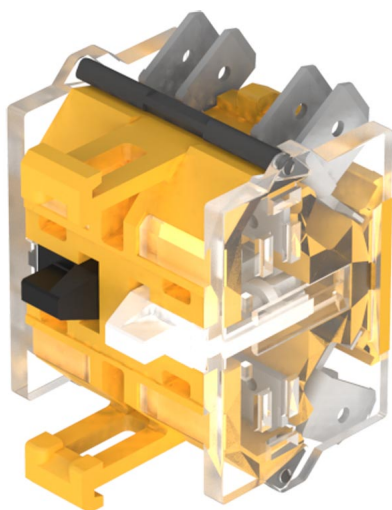

Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight 0.033 kg

Connection Method

Terminal Double plug 6.3 x 0.8 mm


Switching element

Switching current	6 A
Switching voltage	500 V AC
Switching system	Snap-action switching element
Contacts	2 NO
Contact material	Gold

EAO – Your Expert Partner for Human Machine Interfaces

704.631.1 - Illuminated pushbutton actuator round

Dimensions



X = Screw terminal

Wiring diagram



Additional information

For the third switching element the terminal marking insert is to be ordered separately

Legend

Switching action: B = Momentary

EUK-704.928.78D: Flap guard for Series 04 Flush mount, no holes, spring closed, natural aluminium matt anodised finish

