







Sin nuestra expresa autorización, queda terminantemente prohibida la reproducción total o parcial de este documento, así como su uso indebido y/o su exhibición o comunicación a terceros. De los infractores se exigirá el correspondiente resarcimiento de daños y perjuicios. Quedan reservados todos los derechos inherentes, en especial los de patentes, de modelos registrados y estéticos.

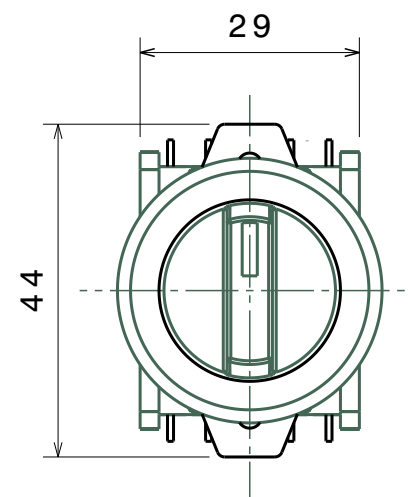

C LV1	A 0	B LV2	
*			13-14
		*	23-24
*			33-34
		*	43-44

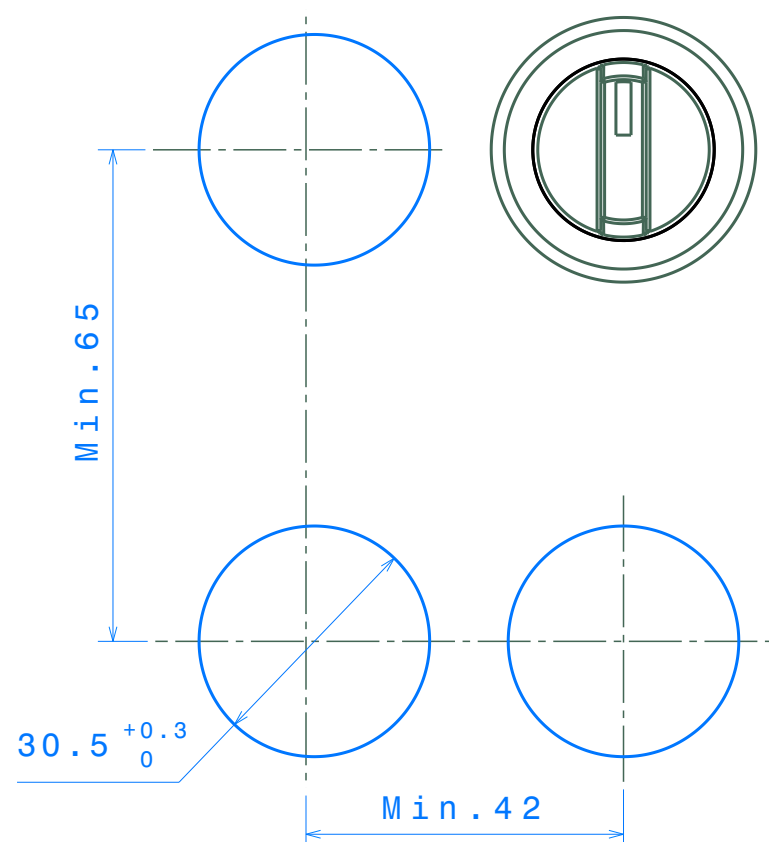

03	CONTAC.DORADO FASTON 2N0	2	X.68.00265.21	EAO 704.901.3/D	0.028	
	CONTAT. D'ORO FASTON 2N0					
02	CONM.MANETA CORT.3P REDON	1	X.68.00263.37	EAO 704.403.018	0.056	
	INTER. MANIGLIA CORTA 3P ROUND					
01	BRIDA METALICA	1	X.68.00262.35	EAO 704.960.5	0.013	
	FLANGIA METALLICA					
00	CR 3P 4N0 AU MA	1			0.125	
	CR 3P 4N0 AU MA					
MARCA	DESCRIPCIÓN	CANT.	CÓDIGO O NORMA	MATERIAL O REFERENCIA	PESO	DIMENSIONES
MARCA	DESCRIZIONE	QUANT.	CÒDICE O NORMA	MATERIALE O REFERENZA	PESO (Kg)	DIMENSIONES (mm)

LOCOMOTIVA E401				ISO 2768-cK DIN ISO 13920-BF		0.125	A3	BEASAIN	OT	Y
A	CORREGIR MARCA 02	2015-10-25	14138							
B	AÑADIR DATASHEETS	2016-06-23	12199							
C	Modificar cajetin	2016-07-26	96015							
D	AÑADIR DATASHEETS	2016-09-27	96015							
Ed.	Descripción	Date	Nome							
1:1	Disegnato	08/05/2015	10221	CR 3P 4NO AU MA						
	Comprovato	08/05/2015	12199							
	Verificato	08/05/2015	14422							
		Date	Nome	CR 3P 4NO AU MA						
		es/it								
		CONSTRUCCIONES Y AUXILIAR DE FERROCARRILES, S.A. BEASAIN (GIPUZKOA)				B . 20 . 71 . 137				D

# EAO – Your Expert Partner for Human Machine Interfaces

## 704.403.018 - Selector switch actuator 3 positions, short lever

### 704.403.018 - Selector switch actuator 3 positions, short lever



*Attention: The preview is based on a sample product. This can differ from your current configuration.*

#### necessary components




**704.901.3/D**  
Switching element

# EAO – Your Expert Partner for Human Machine Interfaces

## 704.403.018 - Selector switch actuator 3 positions, short lever

### 704.403.018 - Selector switch actuator 3 positions, short lever



*Attention: The preview is based on a sample product. This can differ from your current configuration.*

#### Mounting

Mounting cut-out	Ø 30.5 mm
Design	flush

#### Front

Front dimension	Ø 35 mm
Front shape	round
Front ring material	Aluminium
Front ring colour	natural anodized

#### Other Attributes

Weight	0.056 kg
--------	----------

#### Operating-/Indication part

Lever material	Plastic
Lever colour	black
Switching angle	C = 42° / 42°

#### IP-Rating

Front protection	IP 65
------------------	-------

#### Actuator

Switching action	Maintained - Rest - Maintained
------------------	--------------------------------

#### Switching element

Rotary positions	3
------------------	---


#### Function

Selector switch
-----------------

# EAO – Your Expert Partner for Human Machine Interfaces


704.403.018 - Selector switch actuator 3 positions, short lever

## Dimensions




X = Screw terminal

## Mounting cut-outs




PIT = Push-in terminal

## Wiring diagram



## Switching positions



## Additional information

Max. 3 switching elements can be clipped on  
The colour of anodized aluminium parts can vary due to technical production reasons


## Legend

Switching action: A = Rest, C = Maintained

# EAO – Your Expert Partner for Human Machine Interfaces

## 704.403.018 - Selector switch actuator 3 positions, short lever

### 704.901.3/D - Switching element

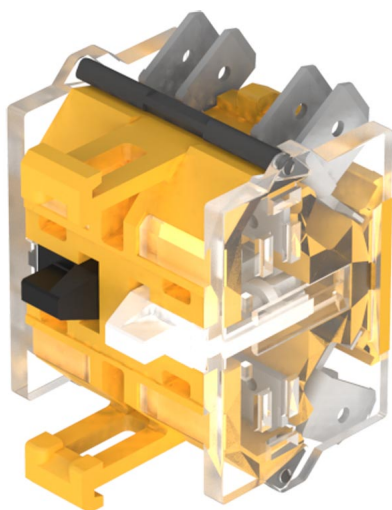

*Attention: The preview is based on a sample product. This can differ from your current configuration.*

### Other Attributes

Weight 0.033 kg

### Connection Method

Terminal Double plug 6.3 x 0.8 mm


### Switching element

Switching current	6 A
Switching voltage	500 V AC
Switching system	Snap-action switching element
Contacts	2 NO
Contact material	Gold

# EAO – Your Expert Partner for Human Machine Interfaces

704.403.018 - Selector switch actuator 3 positions, short lever

## Dimensions



X = Screw terminal

## Wiring diagram



## Additional information

For the third switching element the terminal marking insert is to be ordered separately

## Legend

Switching action: A = Rest, C = Maintained

# EAO – Your Expert Partner for Human Machine Interfaces

## 704.960.5 - Bayonet flange

### 704.960.5 - Bayonet flange



*Attention: The preview is based on a sample product. This can differ from your current configuration.*

### Other Attributes

Material  
Weight

Metal  
0.025 kg

# EAO – Your Expert Partner for **Human Machine Interfaces**

704.960.5 - Bayonet flange

## Dimensions

