

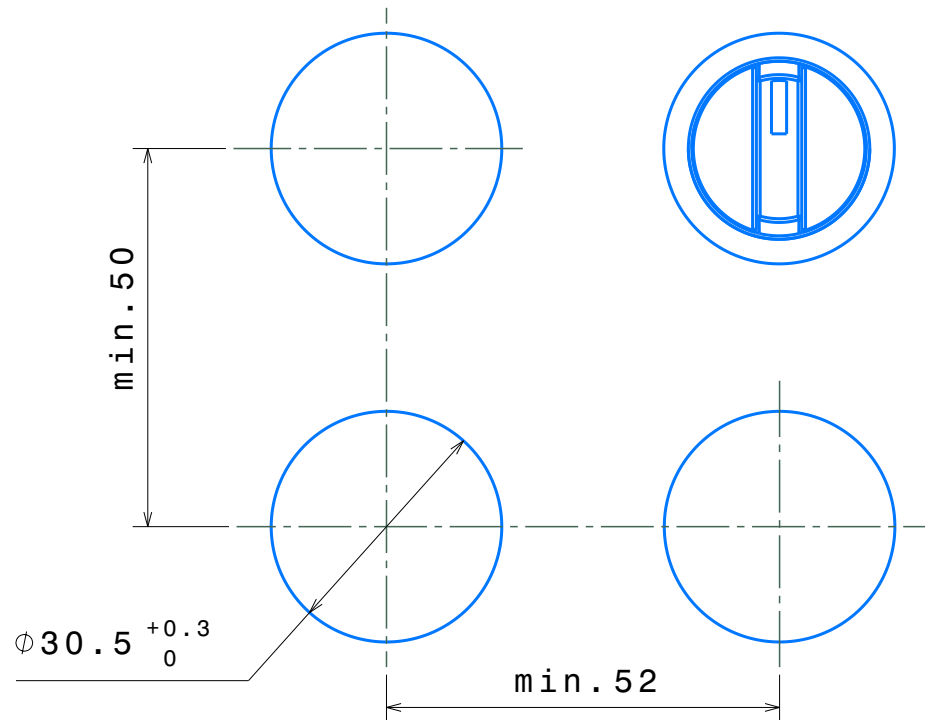
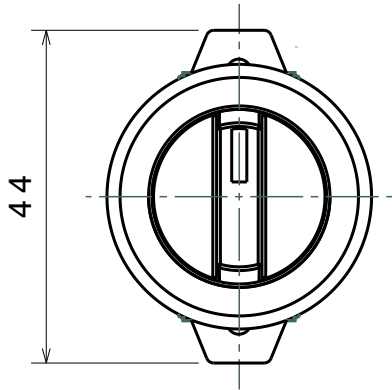


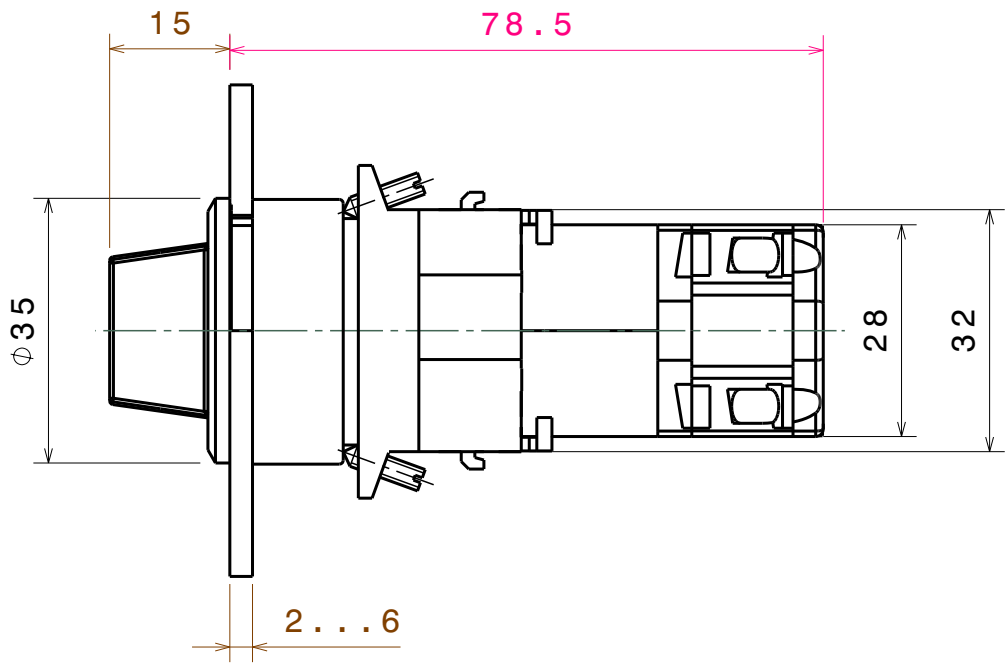

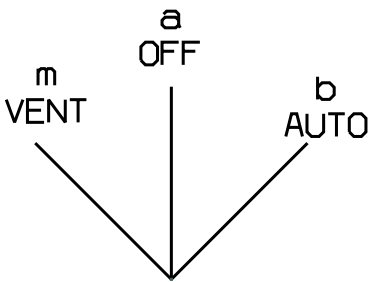

È vietato consegnare a terzi o riprodurre questo documento, utilizzarne il contenuto o renderlo comunque noto a terzi senza esplicita autorizzazione. Ogni infrazione comporta il risarcimento dei danni subiti. Sono riservati tutti i diritti derivanti dalla concessione di brevetti per invenzioni industriali di utilità o di brevetti per modelli ornamentali.

Sin nuestra expresa autorización, queda teminantemente prohibida la reproducción total o parcial de este documento, así como su uso indebido y/o su exhibición o comunicación a terceros. De los infractores se exigirá el correspondiente resarcimiento de daños y perjuicios. Quedan reservados todos los derechos inherentes, en especial los de patentes, de modelos registrados y estéticos.

N° de unidades de contactos	N° de contactos	Terminal	3.	Terminal	Diagrama de contactos												
8	16	31		32													
	15	29		30													
7	14	27		28													
	13	25		26													
6	12	23		24													
	11	21		22													
5	10	19		20													
	9	17		18													
4	8	15		16													
	7	13		14													
3	6	11		12													
	5	9		10													
2	4	7		8													
	3	5		6													
1	2	3		4													
	1	1		2													
Angulo de conmutacion			<input type="checkbox"/>	24°													
			<input checked="" type="checkbox"/>	45°													
			<input type="checkbox"/>	60°													
			<input type="checkbox"/>	90°													




02	CAMARA DE 2 CONTACTOS	1		KRAUS NAIMER	0.000	
	CAMARA DE 2 CONTATOS			CG4 E-9116		
01	CONM. ROT. MANETA CORT. REDO	1	X.68.00263.48	EA0	0.056	
	INTER. ROT. MAN. CORTA ROUND			704.411.118KN		
00	CR 3P KN MA MODO AA CAB	1			0.056	
	CR 3P KN MA MODO AA CAB					
MARCA	DESCRIPCIÓN	CANT.	CÓDIGO O NORMA	MATERIAL O REFERENCIA	PESO	DIMENSIONES
MARCA	DESCRIZIONE	QUANT.	CÓDICE O NORMA	MATERIALE O REFERENZA	PESO (Kg)	DIMENSIONES (mm)

LOCOMOTIVA E401				ISO 2768-cK DIN ISO 13920-BF	0.056	A3	BEASAIN	OT	Y	
A	AÑADIR DATASHEETS	2016-06-22	12199							
B	CAMBIAR CAJETIN	2016-07-26	96015							
C	AÑADIR DATASHEETS	2016-09-27	96015							
Ed.	Descrizione	Date	Nome							
1:1	Disegnato	03/06/2015	10221		CR 3P KN MA MODO AA CAB					
 	Comprovato	03/06/2015	12199							
	Verificado	03/06/2015	14422							
		Date	Nome	CR 3P KN MA MODO AA CAB						
		es/it								
		CONSTRUCCIONES Y AUXILIAR DE FERROCARRILES, S.A. BEASAIN (GIPUZKOA)				B . 20 . 71 . 133				

EAO – Your Expert Partner for Human Machine Interfaces

704.411.118KN - Selector rotary switch actuator, short lever

704.411.118KN - Selector rotary switch actuator, short lever



Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out	Ø 30.5 mm
Design	flush

Front

Front dimension	Ø 35 mm
Front shape	round
Front ring material	Aluminium
Front ring colour	natural anodized

Other Attributes

Weight	0.056 kg
--------	----------

Operating-/Indication part

Lever material	Plastic
Lever colour	black

IP-Rating

Front protection	IP 65
------------------	-------

Switching element

Switching positions	Rest = 9 o'clock
---------------------	------------------


Function

Selector switch

EAO – Your Expert Partner for Human Machine Interfaces


704.411.118KN - Selector rotary switch actuator, short lever

Dimensions



$$L = (\text{Number of stages} \times 12) + 66.5 \text{ mm}$$

Mounting cut-outs



Additional information

The colour of anodized aluminium parts can vary due to technical production reasons

