


È vietato consegnare a terzi o riprodurre questo documento, utilizzarne il contenuto o renderlo comunque noto a terzi senza esplicita autorizzazione. Ogni infrazione comporta il risarcimento dei danni subiti. Sono riservati tutti i diritti derivanti dalla concessione di brevetti per invenzioni industriali di utilità o di brevetti per modelli ornamentali.

Sin nuestra expresa autorización, queda teminantemente prohibida la reproducción total o parcial de este documento, así como su uso indebido y/o su exhibición o comunicación a terceros. De los infractores se exigirá el correspondiente resarcimiento de daños y perjuicios. Quedan reservados todos los derechos inherentes, en especial los de patentes, de modelos registrados y estéticos.

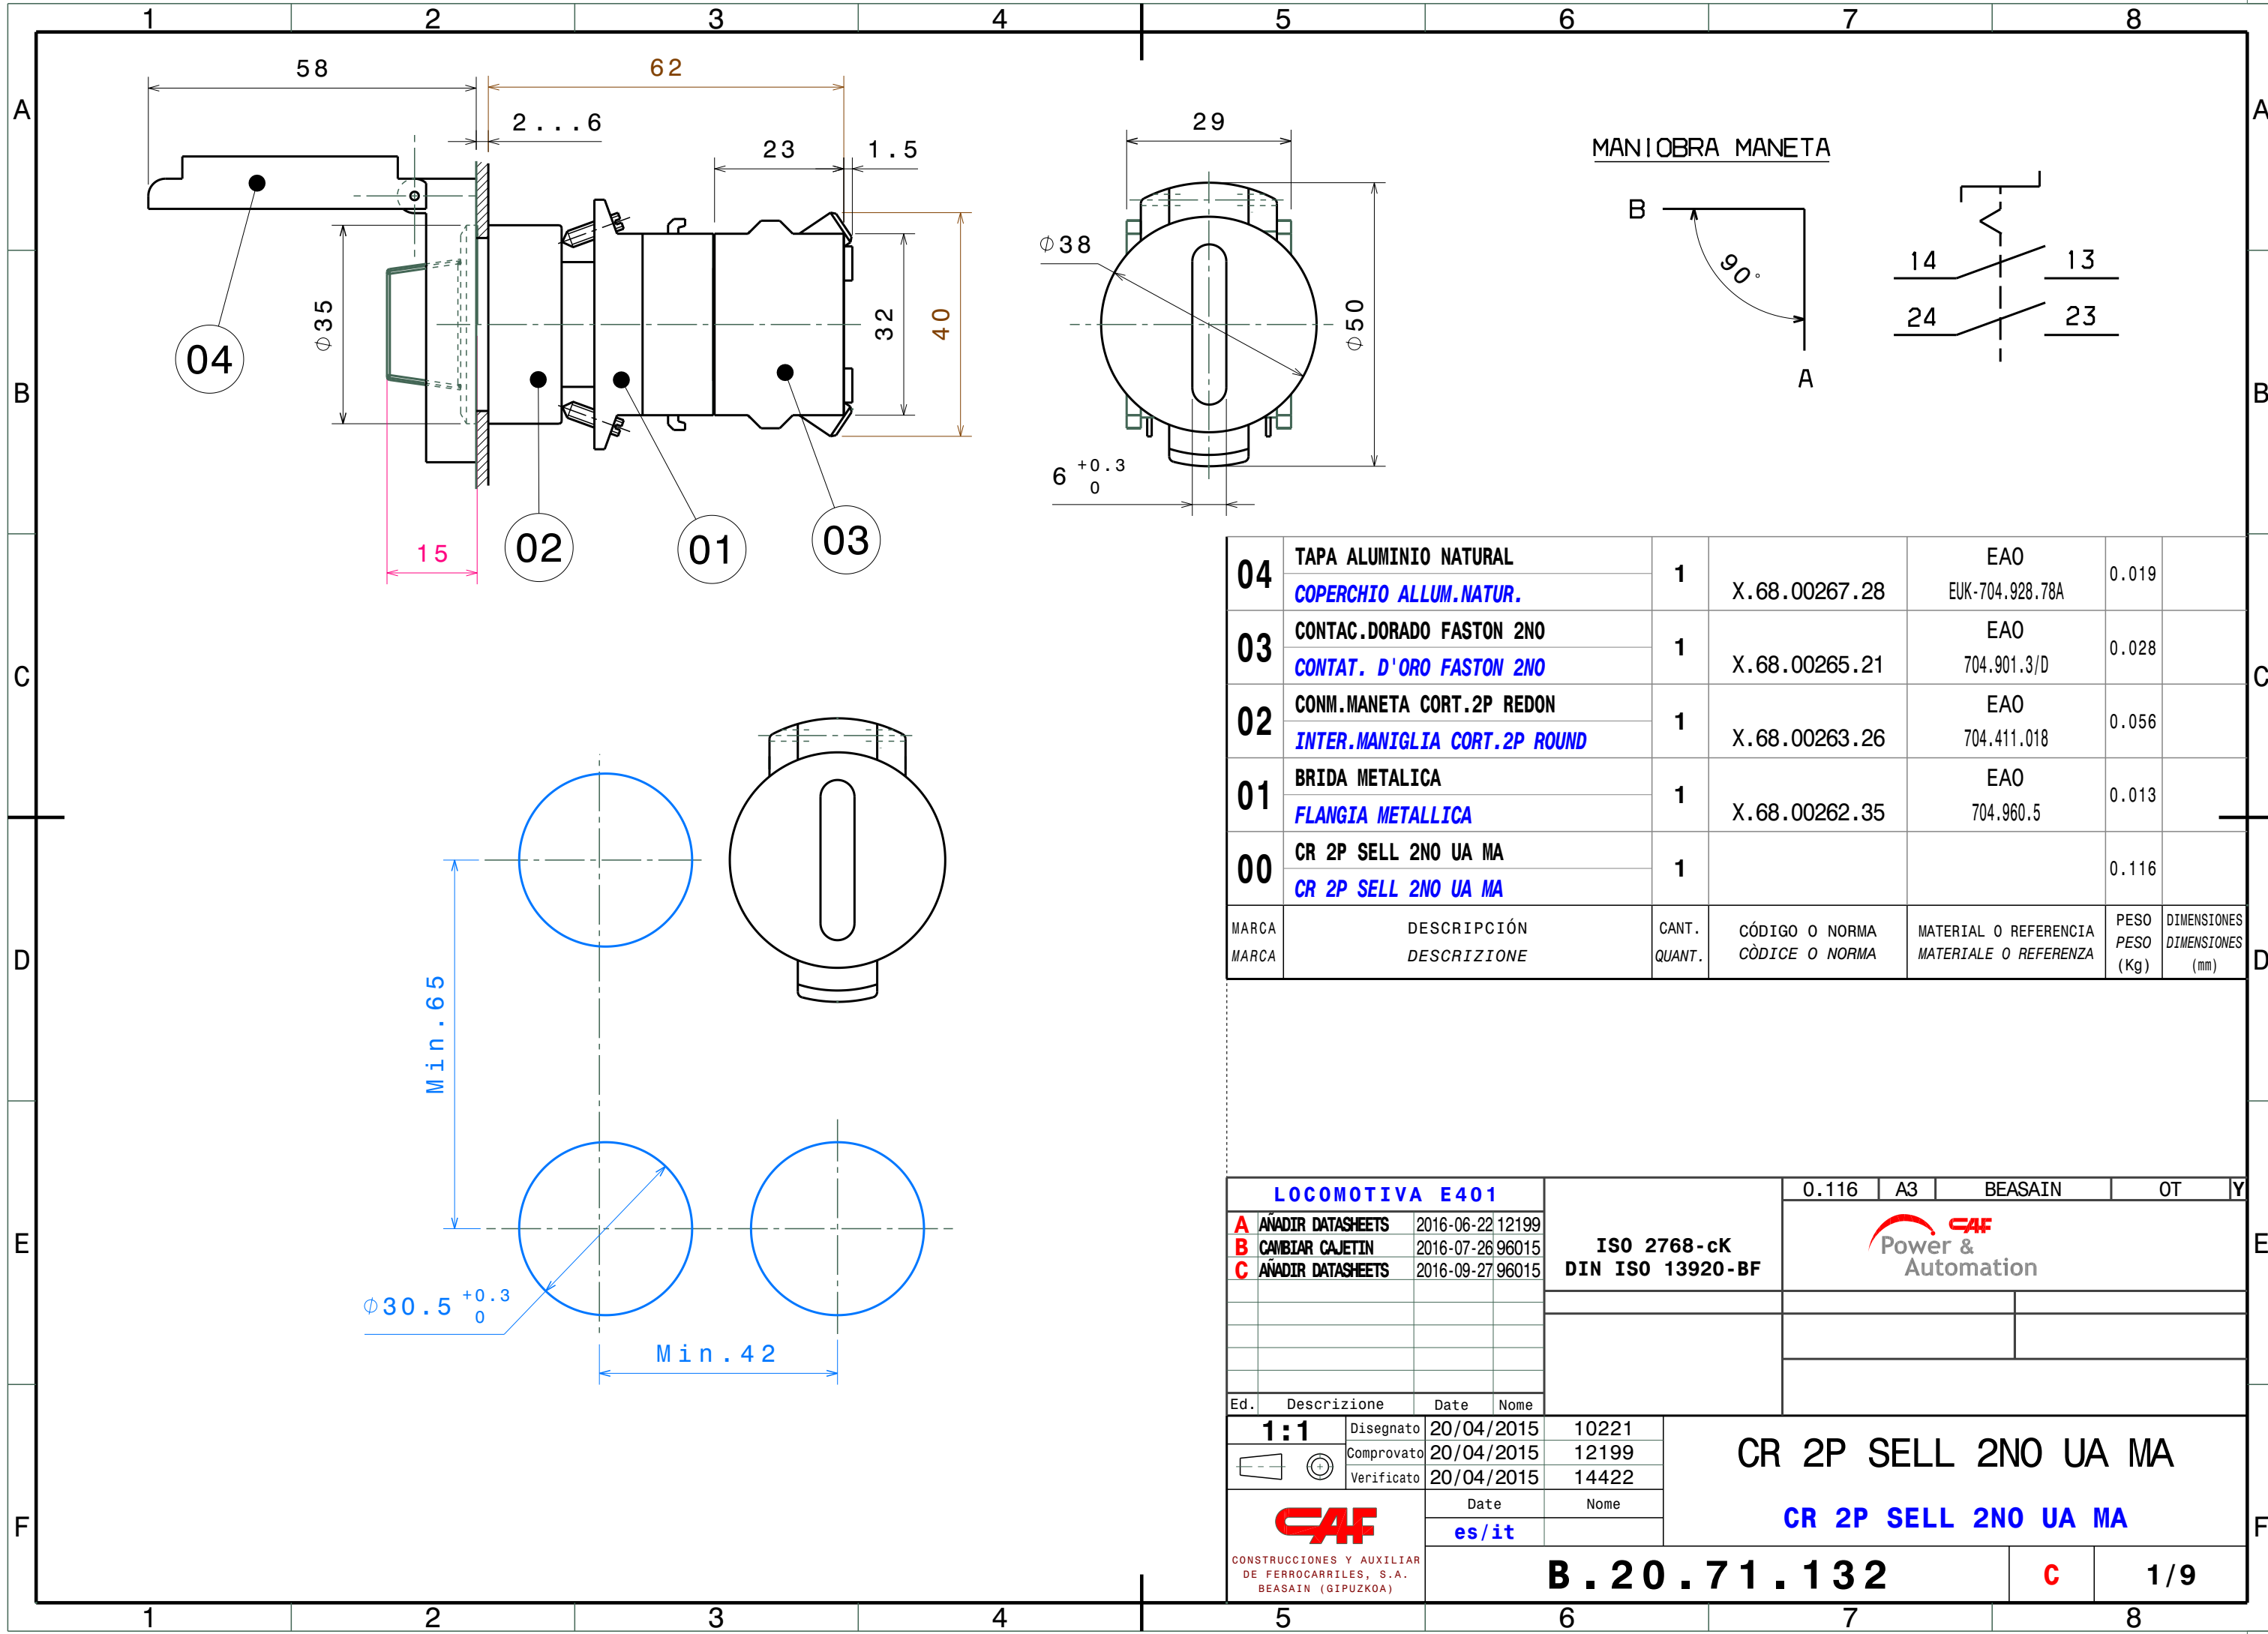

04	TAPA ALUMINIO NATURAL	1	X.68.00267.28	EAO EUK-704.928.78A	0.019	
	COPERCHIO ALLUM.NATUR.					
03	CONTAC.DORADO FASTON 2NO	1	X.68.00265.21	EAO 704.901.3/D	0.028	
	CONTAT. D'ORO FASTON 2NO					
02	CONM.MANETA CORT.2P REDON	1	X.68.00263.26	EAO 704.411.018	0.056	
	INTER.MANIGLIA CORT.2P ROUND					
01	BRIDA METALICA	1	X.68.00262.35	EAO 704.960.5	0.013	
	FLANGIA METALICA					
00	CR 2P SELL 2NO UA MA	1			0.116	
	CR 2P SELL 2NO UA MA					
MARCA	DESCRIPCION	CANT.	CODIGO O NORMA	MATERIAL O REFERENCIA	PESO	DIMENSIONES
MARCA	DESCRIZIONE	QUANT.	CODICE O NORMA	MATERIALE O REFERENZA	PESO (Kg)	DIMENSIONES (mm)

LOCOMOTIVA E401				0.116	A3	BEASAIN	OT	Y
A	AÑADIR DATASHEETS	2016-06-22	12199	<div>ISO 2768-cK DIN ISO 13920-BF</div> <div>Power & Automation</div>				
B	CAMBIAR CAJETIN	2016-07-26	96015					
C	AÑADIR DATASHEETS	2016-09-27	96015					
Ed.	Descripción	Date	Nome					
1:1	Disegnato	20/04/2015	10221	CR 2P SELL 2NO UA MA				
	Comprovato	20/04/2015	12199					
	Verificato	20/04/2015	14422					
<div>CAF</div> <div>CONSTRUCCIONES Y AUXILIAR DE FERROCARRILES, S.A. BEASAIN (GIPUZKOA)</div>		Date	Nome	CR 2P SELL 2NO UA MA				
		es/it						
B.20.71.132				C	1/9			

EAO – Your Expert Partner for Human Machine Interfaces

704.411.018 - Selector switch actuator 2 positions, short lever

704.411.018 - Selector switch actuator 2 positions, short lever



Attention: The preview is based on a sample product. This can differ from your current configuration.

necessary components




704.901.3/D
Switching element

EAO – Your Expert Partner for Human Machine Interfaces

704.411.018 - Selector switch actuator 2 positions, short lever

704.411.018 - Selector switch actuator 2 positions, short lever



Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out	Ø 30.5 mm
Design	flush

Front

Front dimension	Ø 35 mm
Front shape	round
Front ring material	Aluminium
Front ring colour	natural anodized

Other Attributes

Weight	0.056 kg
--------	----------

Operating-/Indication part

Lever material	Plastic
Lever colour	black
Switching angle	C = 90°

IP-Rating

Front protection	IP 65
------------------	-------

Actuator

Switching action	Rest - Maintained
------------------	-------------------

Switching element

Rotary positions	2
------------------	---


Function

Selector switch

EAO – Your Expert Partner for Human Machine Interfaces


704.411.018 - Selector switch actuator 2 positions, short lever

Dimensions



X = Screw terminal

Mounting cut-outs




PIT = Push-in terminal

Wiring diagram



Switching positions



Additional information

Max. 3 switching elements can be clipped on
The colour of anodized aluminium parts can vary due to technical production reasons


Legend

Switching action: A = Rest, C = Maintained

EAO – Your Expert Partner for Human Machine Interfaces

704.411.018 - Selector switch actuator 2 positions, short lever

704.901.3/D - Switching element

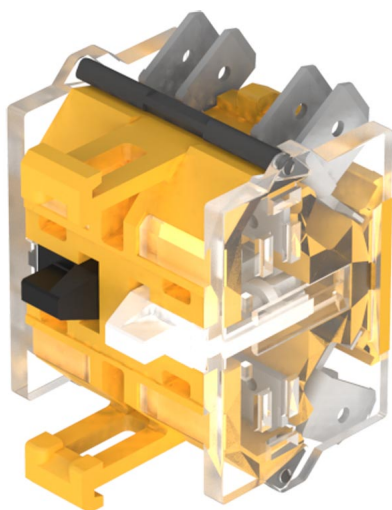

Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight 0.033 kg

Connection Method

Terminal Double plug 6.3 x 0.8 mm


Switching element

Switching current	6 A
Switching voltage	500 V AC
Switching system	Snap-action switching element
Contacts	2 NO
Contact material	Gold

EAO – Your Expert Partner for Human Machine Interfaces

704.411.018 - Selector switch actuator 2 positions, short lever

Dimensions



X = Screw terminal

Wiring diagram



Additional information

For the third switching element the terminal marking insert is to be ordered separately

Legend

Switching action: A = Rest, C = Maintained

EAO – Your Expert Partner for Human Machine Interfaces

704.960.5 - Bayonet flange

704.960.5 - Bayonet flange



Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes


Material
Weight

Metal
0.025 kg

EAO – Your Expert Partner for **Human Machine Interfaces**

704.960.5 - Bayonet flange

Dimensions



EUK-704.928.78A: Flap guard Series 04 Flush mount for selector switch with slot at 0 degrees, spring closed with horizontal locking hole, natural aluminium matt anodised finish.

