
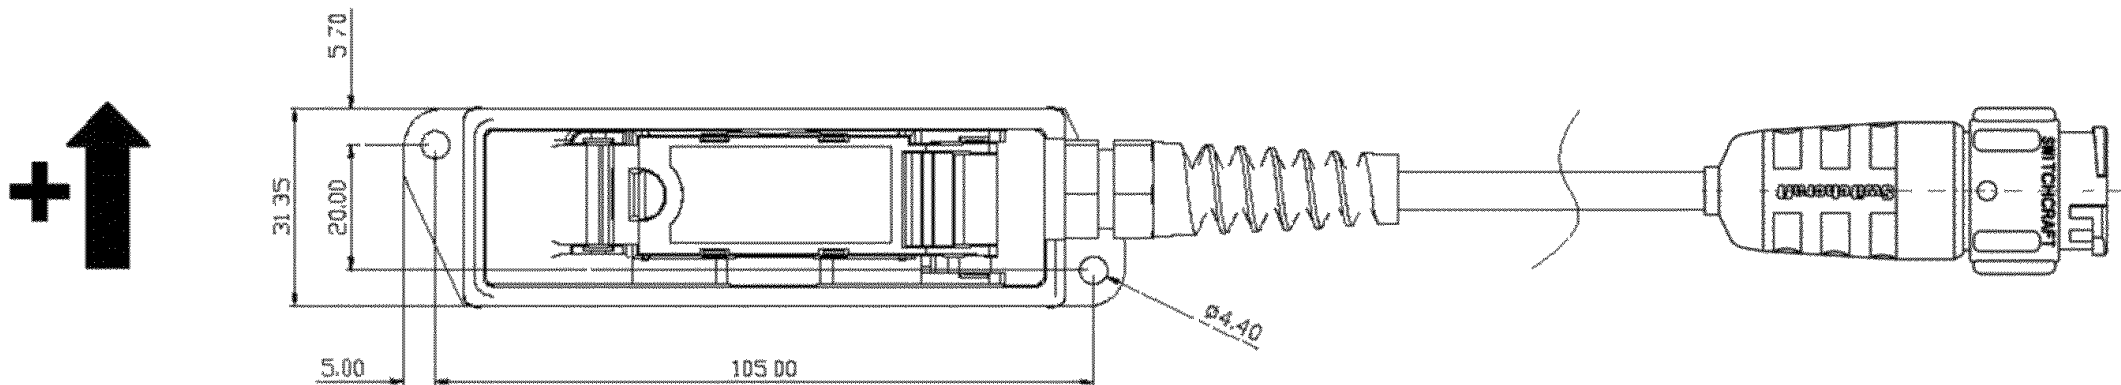


È vietato consegnare a terzi o riprodurre questo documento, utilizzare il contenuto o renderlo comunque noto a terzi senza esplicita autorizzazione. Ogni infrazione comporta il risarcimento dei danni subiti. Sono riservati tutti i diritti derivanti dalla concessione di brevetti per invenzioni industriali di utilità o di brevetti per modelli ornamentali.





Sin nostra expresa autorización, queda tamientemente prohibida la reproducción total o parcial de este documento, así como su uso, incluido y/o su exhibición o comunicación a terceros. De los infracciones se exigirá el correspondiente resarcimiento de daños y perjuicios. Quedan reservados todos los derechos inherentes, en especial, los de patentes, de modelos registrados y estéticos.

PCM 10-P

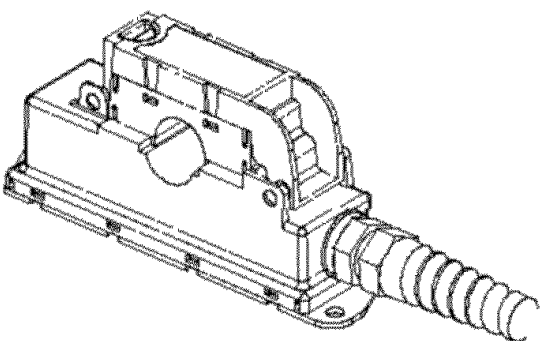

- General tolerance  $\pm 0.5 \text{ mm}$
- Connection of secondary  
Via 4 core screened  
polyurethane cable  
0.25 m in length,  
Halogen free, terminated  
with Switchcraft  
EN3L4M connector
- $I_{OUT}$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed  $90^\circ\text{C}$
- As it is a sealed unit no moisture should be allowed to ingress into the unit during installation.
- Weight: 120g

Secondary terminals :

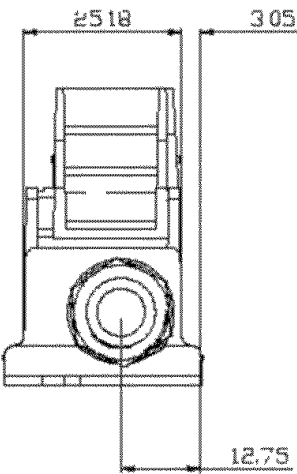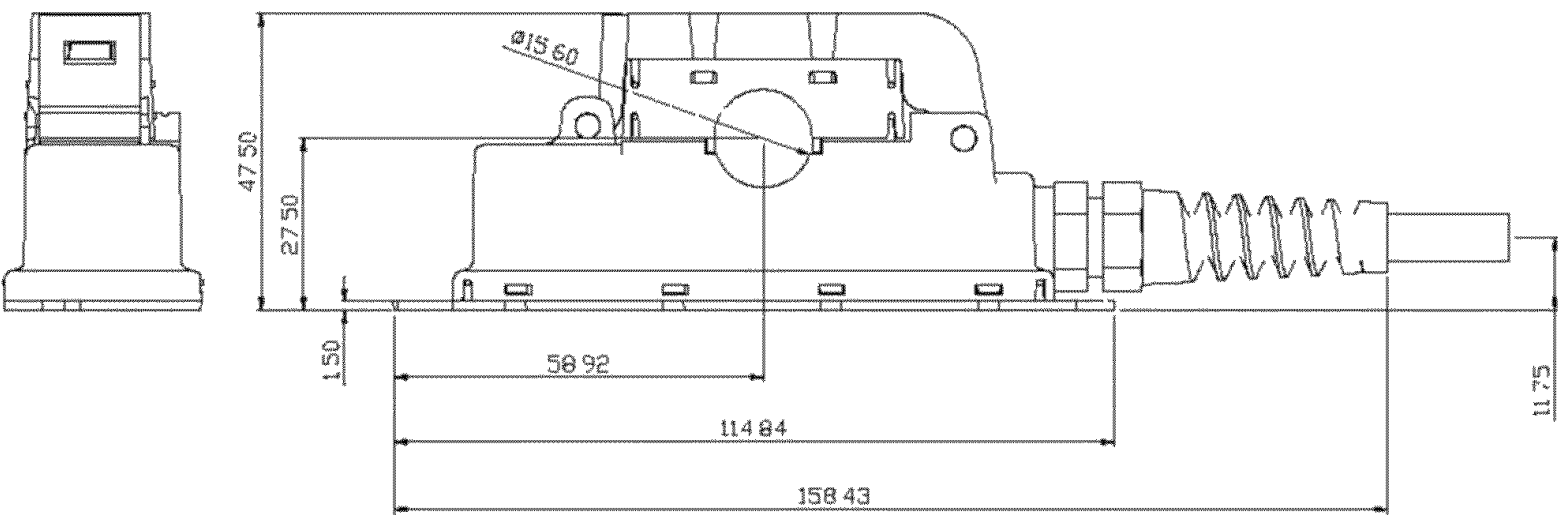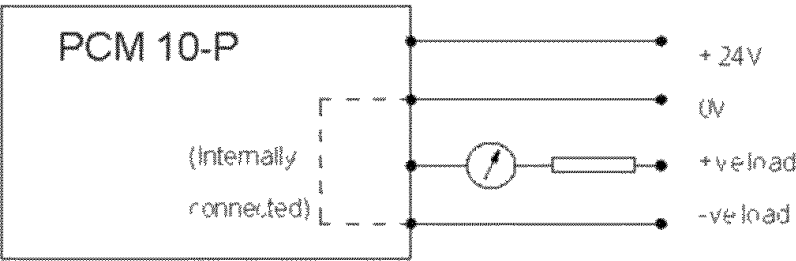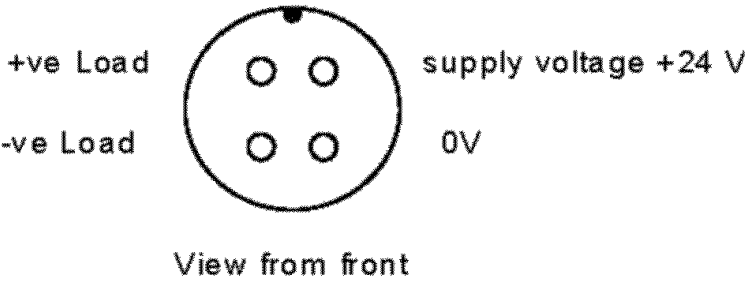

01	SENSOR CORRIENTE PARARRAYOS			1		PCM 10-P LEM	0.200		
	ARRESTO SENSORE DI CORRIENTE								
MARCA	DESCRIPCIÓN			CANT.	CÓDIGO O NORMA	MATERIAL O REFERENCIA	PESO		DIMENSIONES
MARCA	DESCRIZIONE			QUANT.	CÓDICE O NORMA	MATERIALE O REFERENZA	PESO (Kg)		