




Logical Physical x 1881, y: 573

Root 00:18:30

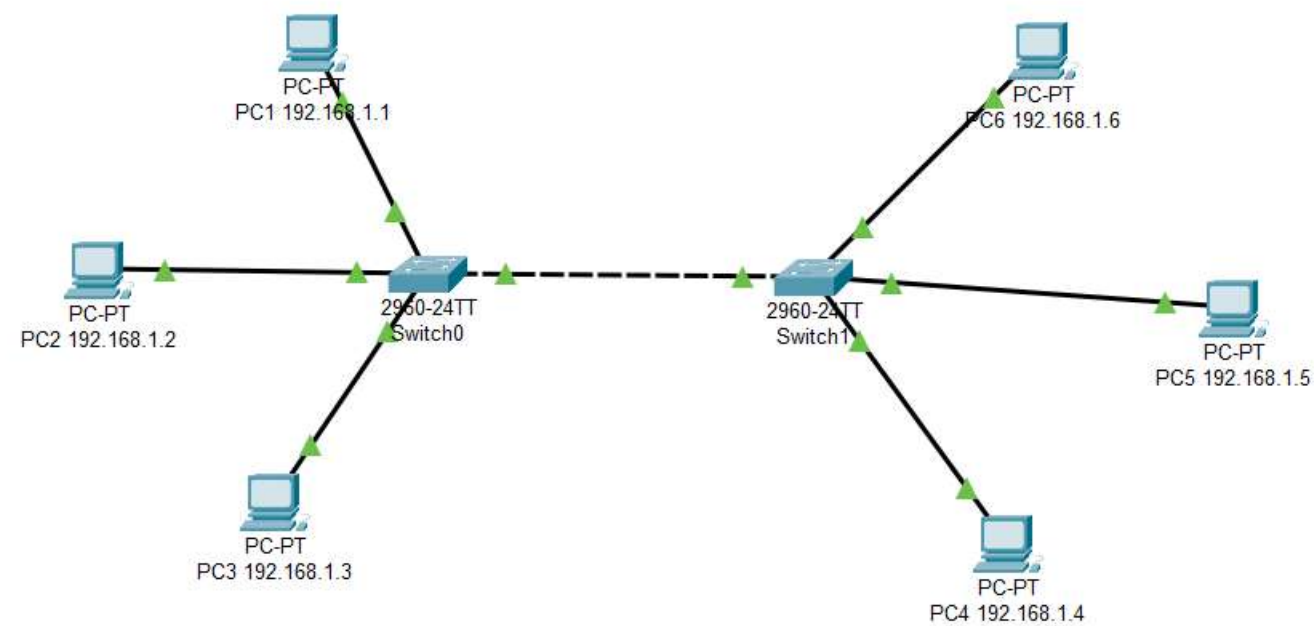

Time: 00:00:37

Realtime Simulation



(Select a Device to Drag and Drop to the Workspace)

Scenario 0

New

Delete

Toggle PDU List Window

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete



Logical Physical x 1776, y: 312

PC-PT  
PC2 192.168.1.2

PC-PT  
PC3 192.168.1.3

Time: 00:01:34



2621XM

PC1 192.168.1.1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>
```

☐ Top

Root

Realtime Simulation

Num Edit Delete

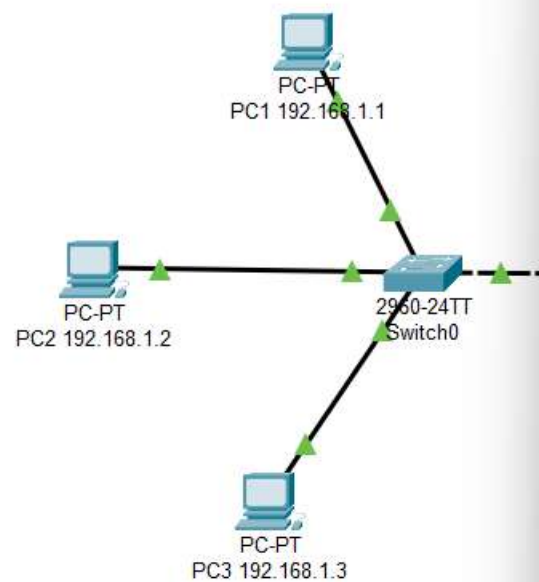

PC6 192.168.1.6

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3


Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Time: 00:02:31



2621XM

Realtime Simulation