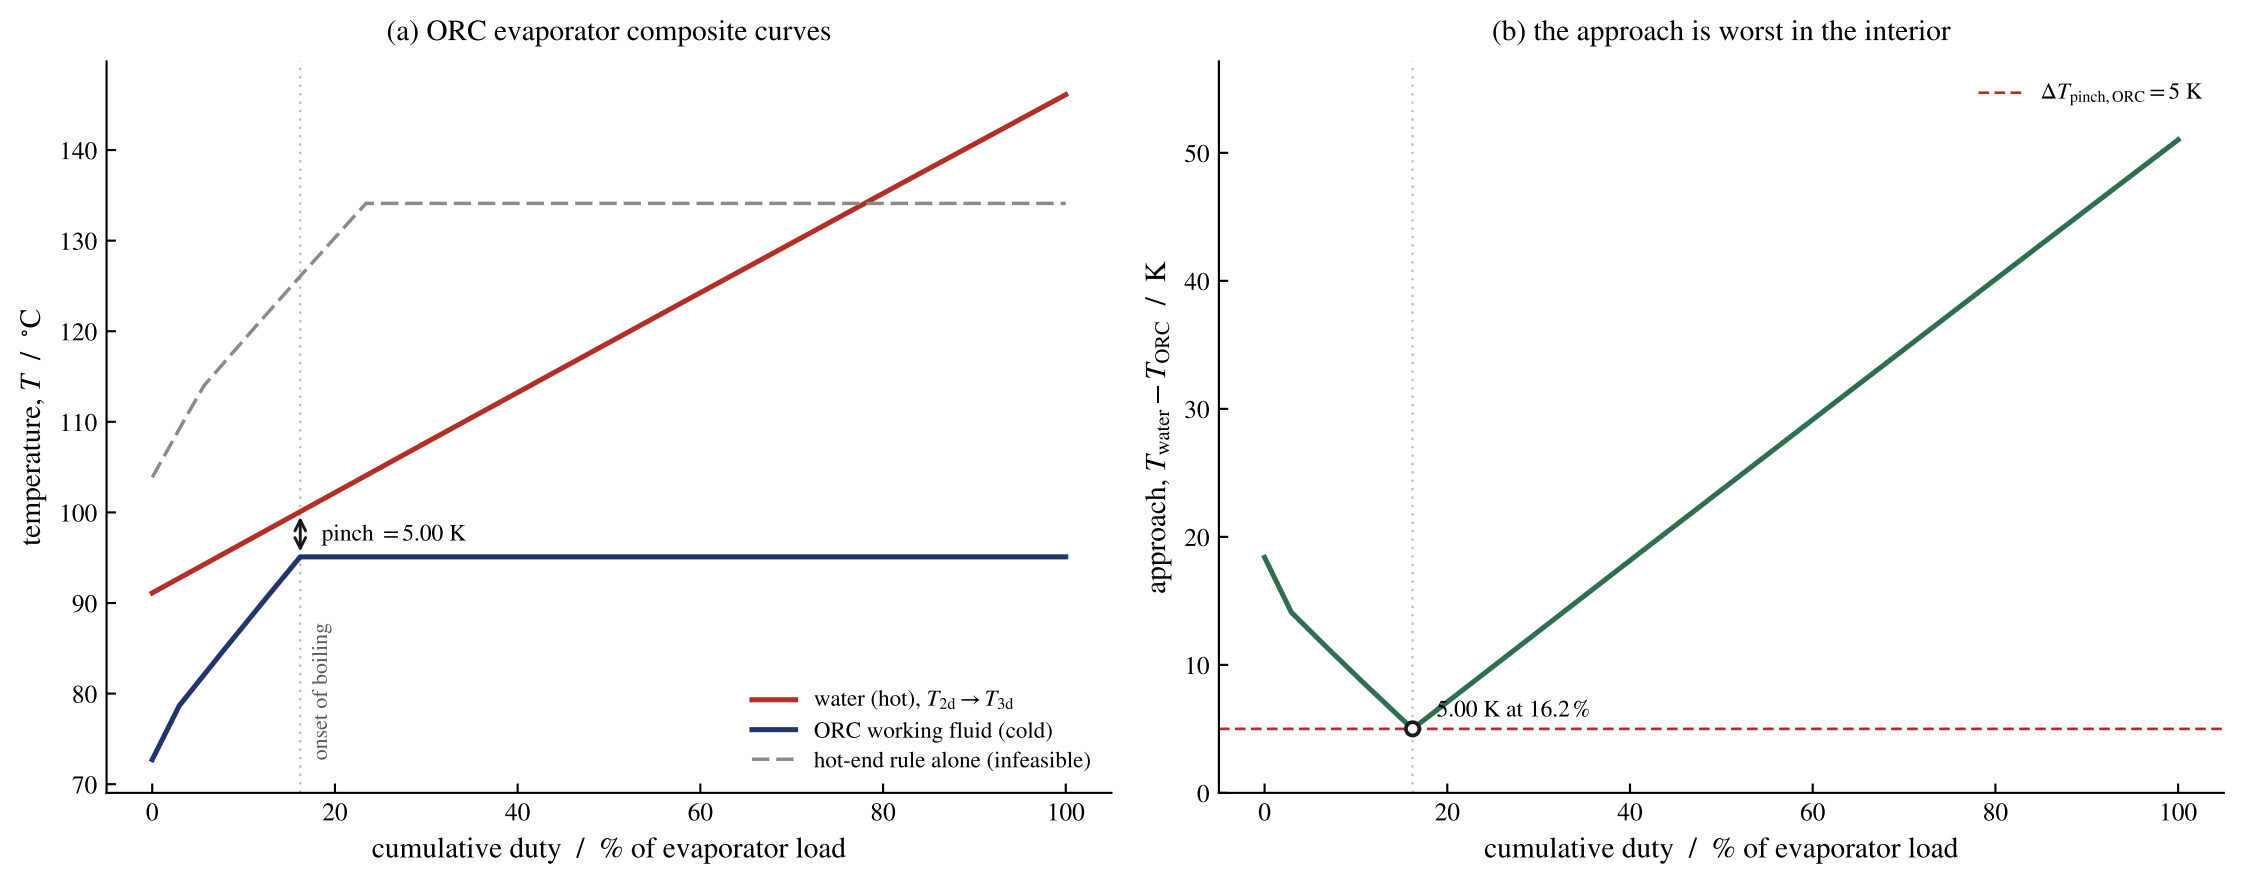
(a) ORC evaporator composite curves
temperature, T / °C
cumulative duty / % of evaporator load
pinch = 5.00 K
onset of boiling
water (hot), $T_{2d} \rightarrow T_{3d}$
ORC working fluid (cold)
hot-end rule alone (infeasible)
(b) the approach is worst in the interior
approach, $T_{water} - T_{ORC}$ / K
$\Delta T_{pinch,ORC} = 5$ K
5.00 K at 16.2 %
cumulative duty / % of evaporator load