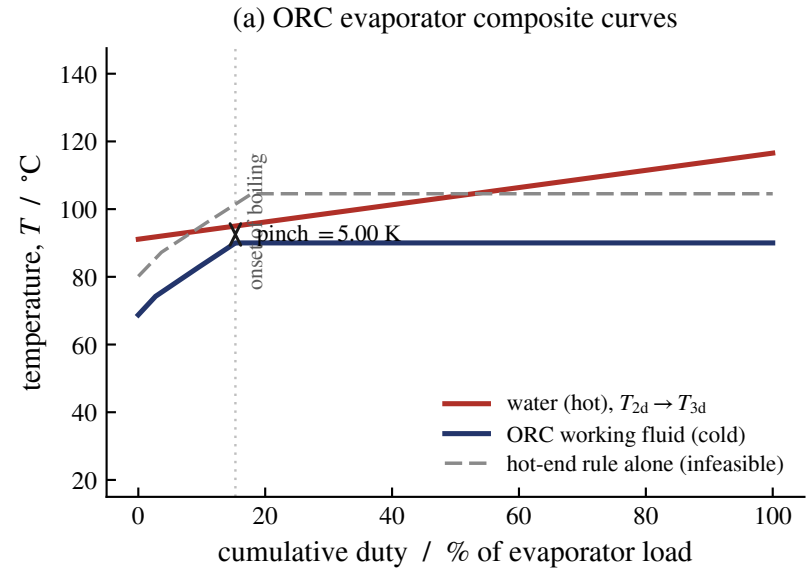
(a) ORC evaporator composite curves
temperature, $T$ / °C
cumulative duty / % of evaporator load
onset of boiling
$\Delta T_{pinch} = 5.00$ K
water (hot), $T_{2d} \rightarrow T_{3d}$
ORC working fluid (cold)
hot-end rule alone (infeasible)

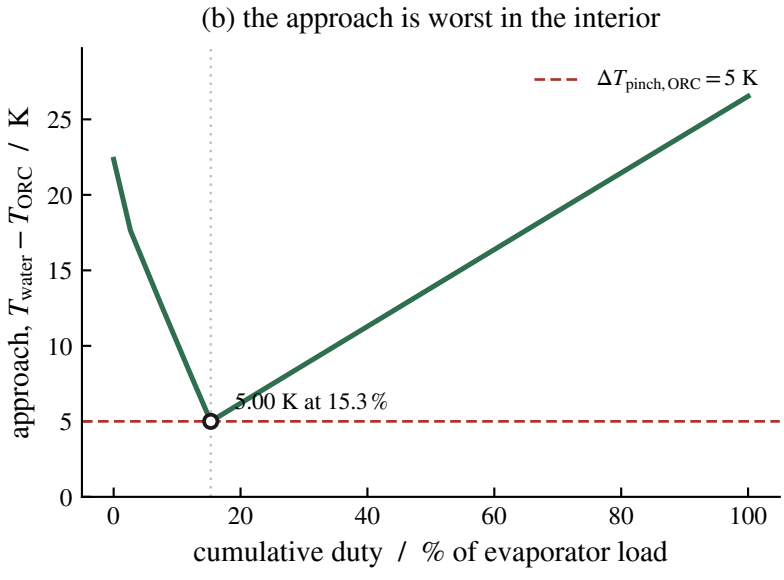
(b) the approach is worst in the interior
approach, $T_{water} - T_{ORC}$ / K
cumulative duty / % of evaporator load
$\Delta T_{pinch, ORC} = 5$ K
5.00 K at 15.3 %