Ex.No:11 | Implementation of Subnetting in Cisco Packet Tracer

1.9.26

AIM:

To implement classless IP subnetting and configure a network using Cisco Packet Tracer.

Subnetting divides a large IP network into smaller subnets using a suitable subnet mask.

Procedure:

1, Open Cisco packet Tracer and create a new network topology.

2. Add the required routers, switches and PCs.

3. Connect the devices using appropriate Cables.

4. Divide the network into smaller /27 subnets.


5. Assign IP address, subnet masks and default gateways to the devices.


6. Configure the router interfaces using CLI:

7. Configure switch ports in access mode

8. Configure each PC with its IP address, subnet mask.

9. Test Connectivity using ping command between PC's and routers.

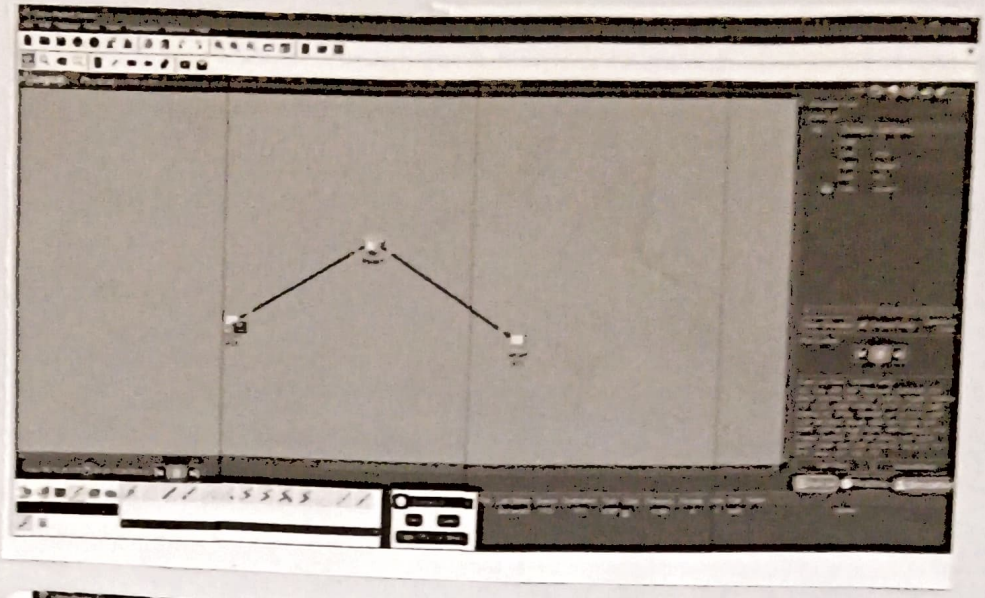

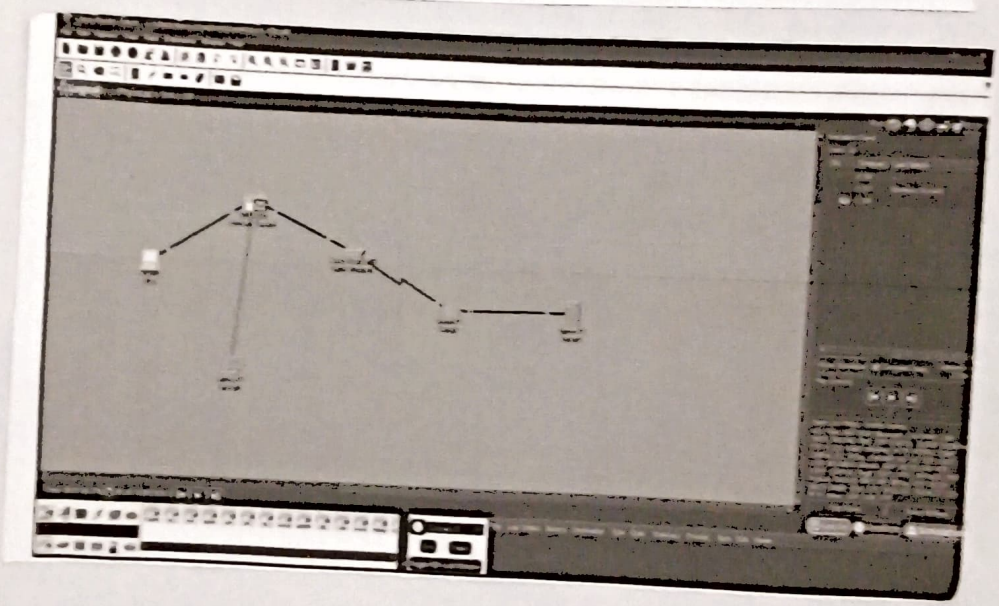

Result:

The network was successfully subnetted and configured in Cisco Packet Tracer using /27 subnet masks was verified using ping command.